



Hans-Joachim Kretzschmar and Katja Knobloch


**Supplementary Backward Equations for the
Industrial Formulation IAPWS-IF97 of Water and Steam
for Fast Calculations of Heat Cycles, Boilers,
and Steam Turbines**

Contents


- Structure of IAPWS-IF97 and Supplementary Backward Equations
- Backward and Boundary Equations for Functions of (p,h)
- Backward and Boundary Equations for Functions of (p,s)
- Backward and Boundary Equations for Functions of (h,s)
- Backward Equations for Functions of (p,T) in Region 3
- Computing Times in Comparison with IAPWS-IF97 Fundamental Equations

14th ICPWS, Kyoto, 2004

**IAPWS Industrial Formulation 1997 for the
Thermodynamic Properties of Water and Steam
IAPWS-IF97**

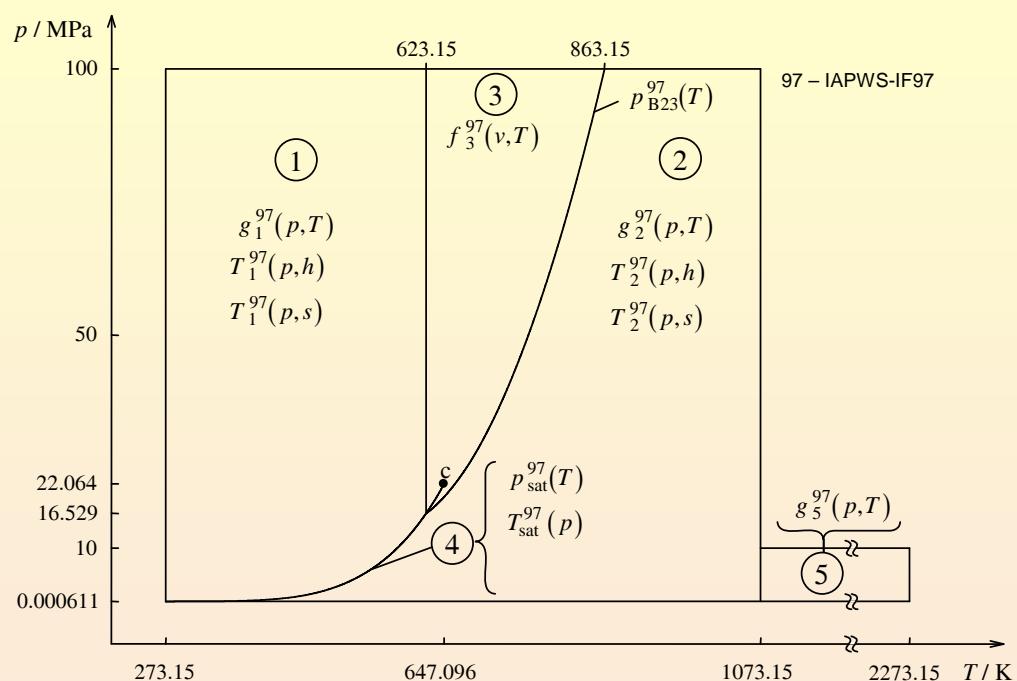

14th ICPWS, Kyoto, 2004

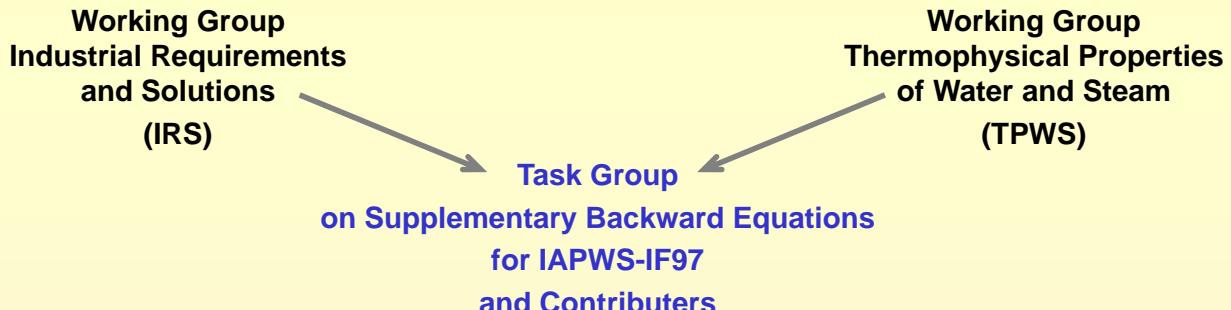

J. R. Cooper
A. Dittmann
D. G. Friend
A. H. Harvey
K. Knobloch
H.-J. Kretzschmar (chair)
R. Mares
R. Span
I. Stöcker
W. Wagner

Evaluation Task Group

J. Gallagher
K. Miyagawa (chair)
N. Okita
I. Weber

14th ICPWS, Kyoto, 2004

| Supplementary Release | Equations | Status |
|--|--|---|
| IAPWS-IF97-S01: Supplementary Release on Backward Equations for Pressure as a Function of Enthalpy and Entropy $p(h,s)$ to the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam. | $p_1(h,s)$ $p_2(h,s)$ | adopted in 2001 |
| IAPWS-IF97-S03: Supplementary Release on Backward Equations for the Functions $T(p,h)$, $v(p,h)$ and $T(p,s)$, $v(p,s)$ for Region 3 of the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam, 2003. | $T_3, v_3(p,h)$ $T_3, v_3(p,s)$ | adopted in 2003 |
| IAPWS-IF97-S03rev (Draft): Revised Supplementary Release on Backward Equations for the Functions $T(p,h)$, $v(p,h)$ and $T(p,s)$, $v(p,s)$ for Region 3 of the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam. | $T_3, v_3(p,h)$ $T_3, v_3(p,s)$ $p_{3sat}(h)$ $p_{3sat}(s)$ | evaluated, to be adopted in 2004 |
| IAPWS-IF97-S04 (Draft): Supplementary Release on Backward Equations $p(h,s)$ for Region 3, Equations as a Function of h and s for the Region Boundaries, and an Equation $T_{sat}(h,s)$ for Region 4 of the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam. | $p_3(h,s)$ $T_{sat}(h,s)$ $h'(s)$, $h''(s)$ $h_{B13}(s)$ $T_{B23}(h,s)$ | evaluated, to be adopted in 2004 |
| Supplementary Release on Backward Equations for Specific Volume as a Function of Pressure and Temperature $v(p,T)$ for Region 3 of the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam. (Draft) | $v_3(p,T)$ | to be submitted in 2004 (adoption planned in 2005) |

14th ICPWS, Kyoto, 2004

Requirements on Backward Equations

1. Extremely high numerical consistency

- Deviation between the backward equation and the relating fundamental equation
- Corresponds to iteration accuracy otherwise used in numerical calculations of process modeling
- Determined by IAPWS based on an international survey in industry

Example: Backward equations $T(p,h)$


$$|\Delta T| = |T - T(p,h)|$$

where $h(p,T)$ – derived from $g(p,T)$


Problem: The numerical consistency is more than one magnitude higher than accuracy of the properties themselves

2. Calculation of the backward equations should be much faster than the corresponding iterations of the fundamental equations

Supplementary Backward Equations for IAPWS-IF97

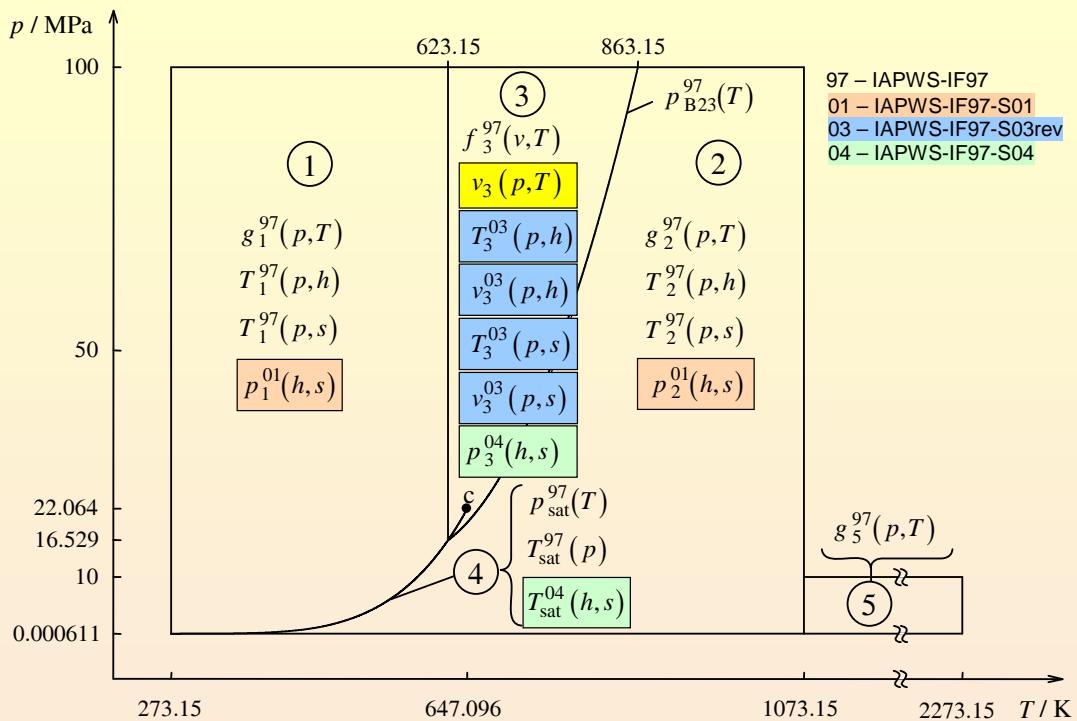

Backward and Boundary Equations for Functions of Pressure and Enthalpy (p, h)

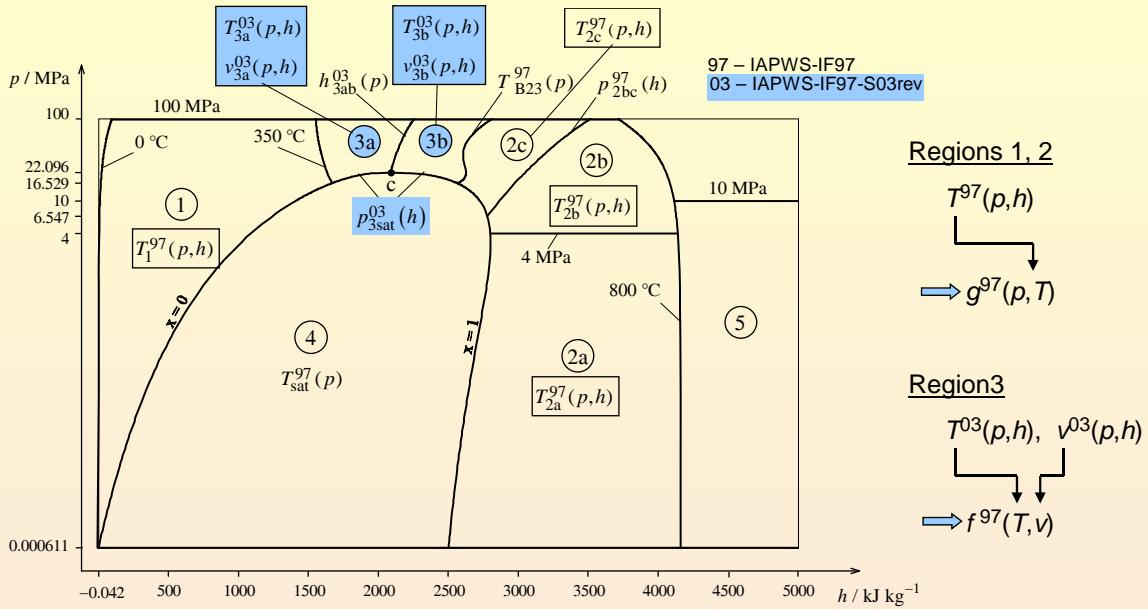

14th ICPWS, Kyoto, 2004

Backward Equations $T(p,h)$ and $v(p,h)$

Structure

$$\frac{T(p,h)}{T^*} = \sum_{i=1}^N n_i \left(\frac{p}{p^*} + a \right)^{I_i} \left(\frac{h}{h^*} + b \right)^{J_i} \quad \frac{v(p,h)}{v^*} = \sum_{i=1}^N n_i \left(\frac{p}{p^*} + a \right)^{I_i} \left(\frac{h}{h^*} + b \right)^{J_i}$$


Numerical consistency

| Equation | N | a | b | $ \Delta T _{\text{tol}}$ mK | $ \Delta T _{\text{max}}$ mK |
|--------------------|----|-------|--------|---------------------------------|---------------------------------|
| $T_1^{97}(p,h)$ | 20 | 0 | 1 | 25 | 23.6 |
| $T_{2a}^{97}(p,h)$ | 34 | 0 | -2.1 | 10 | 9.3 |
| $T_{2b}^{97}(p,h)$ | 38 | -2 | -2.6 | 10 | 9.6 |
| $T_{2c}^{97}(p,h)$ | 23 | 25 | -1.8 | 25 | 23.7 |
| $T_{3a}^{93}(p,h)$ | 31 | 0.24 | -0.615 | 25 | 23.6 |
| $T_{3b}^{93}(p,h)$ | 33 | 0.298 | -0.720 | 25 | 19.6 |

| Equation | N | a | b | $ \Delta v/v _{\text{tol}}$ % | $ \Delta v/v _{\text{max}}$ % |
|--------------------|----|--------|--------|----------------------------------|----------------------------------|
| $v_{3a}^{93}(p,h)$ | 32 | 0.128 | -0.727 | 0.01 | 0.0080 |
| $v_{3b}^{93}(p,h)$ | 30 | 0.0661 | -0.72 | 0.01 | 0.0095 |


14th ICPWS, Kyoto, 2004

Backward and Boundary Equations for Functions of Pressure and Entropy (p,s)

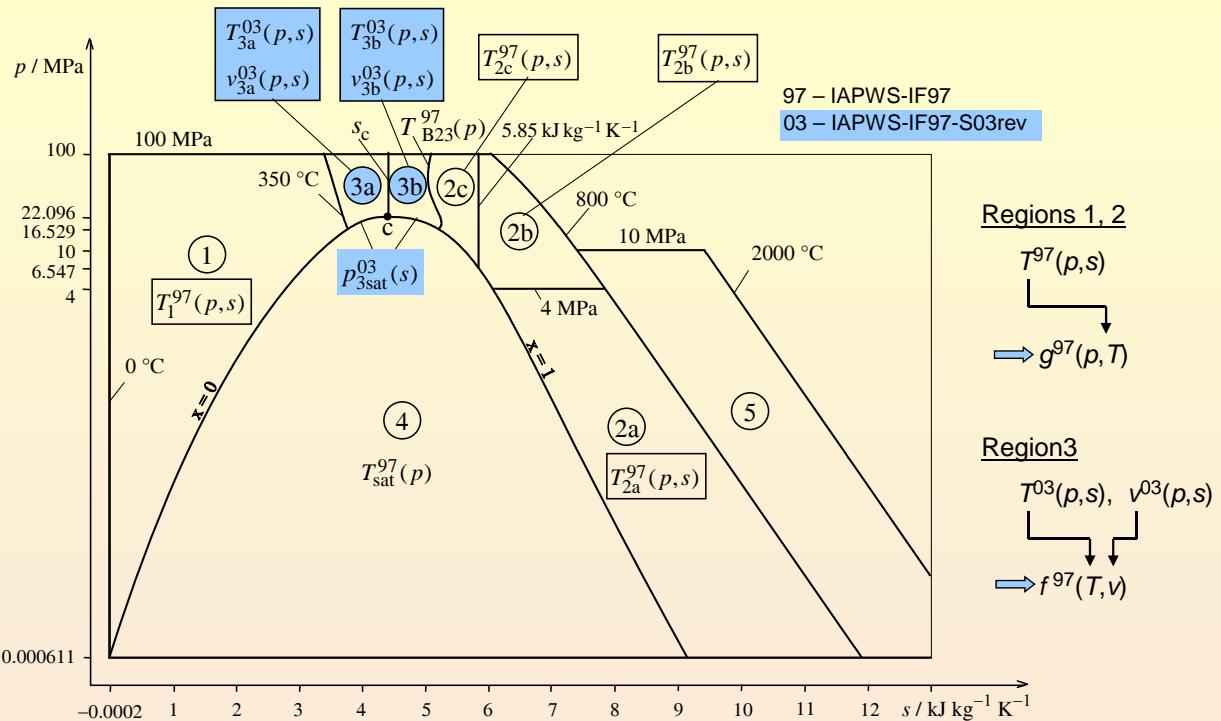


14th ICPWS, Kyoto, 2004

Backward Equations for Functions of Enthalpy and Entropy (h,s)

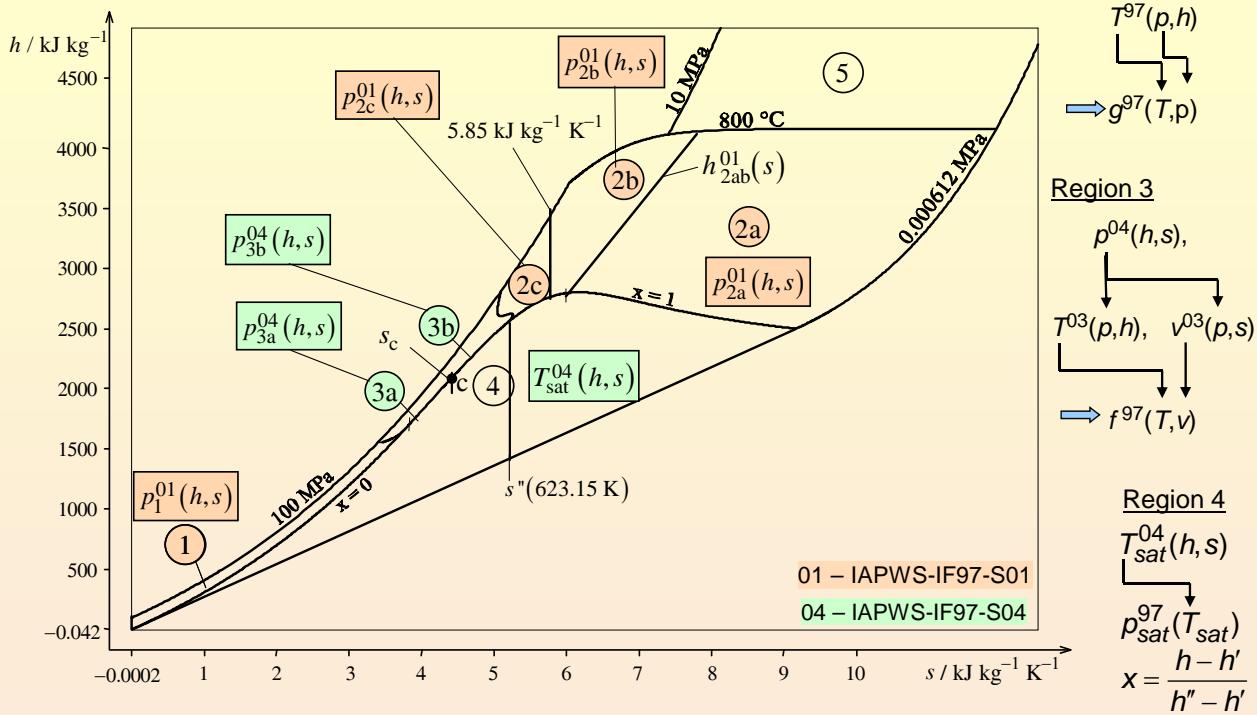

14th ICPWS, Kyoto, 2004

Boundary Equations for Functions of Enthalpy and Entropy (h,s)

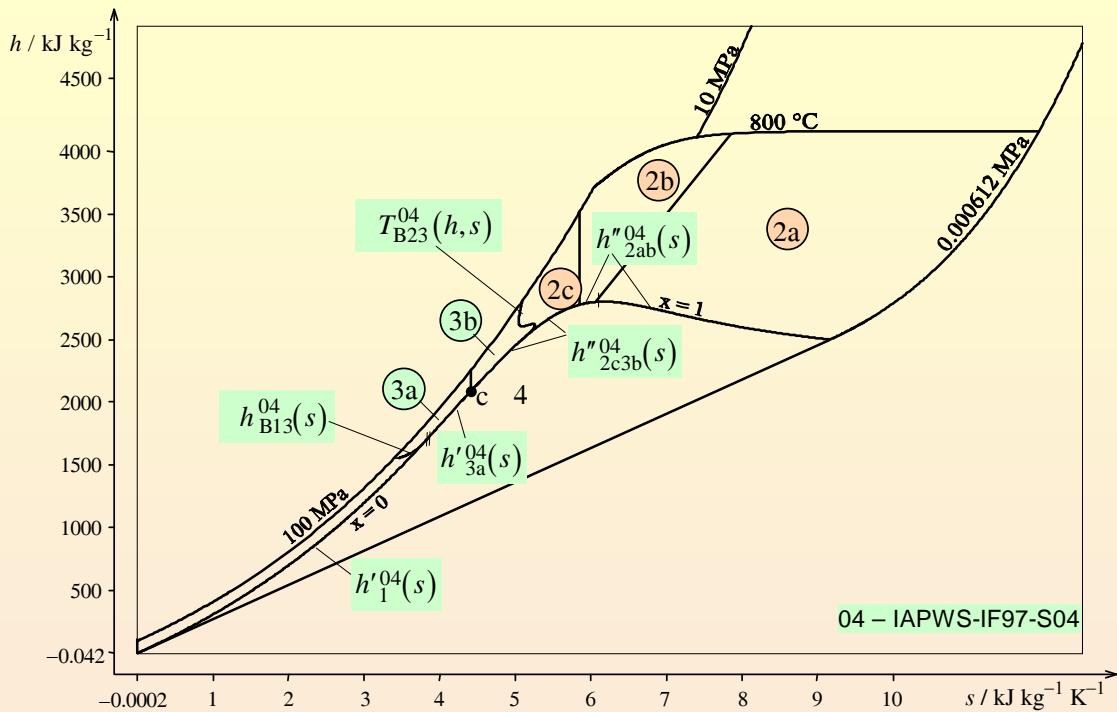

14th ICPWS, Kyoto, 2004

Backward Equations $p(h,s)$ and $T_{\text{sat}}(h,s)$

Structure

$$\frac{p(h,s)}{p^*} = \left[\sum_{i=1}^N n_i \left(\frac{h}{h^*} + a \right)^{I_i} \left(\frac{s}{s^*} + b \right)^{J_i} \right]^c$$

$$\frac{T_{\text{sat}}(h,s)}{T^*} = \sum_{i=1}^{36} n_i \left(\frac{h}{h^*} - 0.119 \right)^{I_i} \left(\frac{s}{s^*} - 1.07 \right)^{J_i}$$

Numerical consistency

| Equation | $ \Delta p/p _{\text{tol}}$ % | $ \Delta p/p _{\text{max}}$ % | $ \Delta T _{\text{tol}}$ mK | $ \Delta T _{\text{max}}$ mK | $ \Delta V/V _{\text{tol}}$ % | $ \Delta V/V _{\text{max}}$ % |
|---|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| $p_1^{01}(h,s)$ $p \leq 2.5 \text{ MPa}$ | 0.60 | 0.55 | 25 | 24.0 | | |
| $p > 2.5 \text{ MPa}$ | 15 kPa | 14 kPa | | | | |
| $p_{2a}^{01}(h,s)$ | 0.0035 | 0.0029 | 10 | 9.7 | | |
| $p_{2b}^{01}(h,s)$ | 0.0035 | 0.0034 | 10 | 9.8 | | |
| $p_{2c}^{01}(h,s)$ | 0.0088 | 0.0063 | 25 | 24.9 | | |
| $p_{3a}^{04}(h,s)$ | 0.01 | 0.0070 | 25 | 23.7 | 0.01 | 0.0097 |
| $p_{3b}^{04}(h,s)$ | 0.01 | 0.0084 | 25 | 22.4 | 0.01 | 0.0095 |
| Equation | $ \Delta T _{\text{tol}}$ mK | $ \Delta T _{\text{max}}$ mK | $ \Delta p/p _{\text{tol}}$ % | $ \Delta p/p _{\text{max}}$ % | $ \Delta x _{\text{tol}}$ | $ \Delta x _{\text{max}}$ |
| $T_{\text{sat}}^{04}(h,s)$ $s \leq 5.85 \text{ kJ kg}^{-1}\text{K}^{-1}$ | 25 | 0.86 | 0.0088 | 0.0034 | 4.4×10^{-6} | 0.57×10^{-6} |
| $s > 5.85 \text{ kJ kg}^{-1}\text{K}^{-1}$ | 10 | 0.67 | 0.0035 | 0.0029 | 0.64×10^{-6} | 0.25×10^{-6} |

14th ICPWS, Kyoto, 2004

Computing Time in Comparison with IAPWS-IF97 Fundamental Equations

Computing Time Ratio (CTR)

$$CTR = \frac{\text{Compting time of fundamental eq.}}{\text{Compting time of backward eq.}}$$

Backward Equations

| Function | Reg. | Backward Equation(s) | CTR |
|----------|------|---|-----|
| (p,h) | 1 | $T_1^{97}(p,h)$ | 5 |
| | 2 | $T_2^{97}(p,h)$ | 6 |
| | 3 | $T_3^{03}(p,h) \text{ & } v_3^{03}(p,h)$ | 16 |
| (p,s) | 1 | $T_1^{97}(p,s)$ | 6 |
| | 2 | $T_2^{97}(p,s)$ | 7 |
| | 3 | $T_3^{03}(p,s) \text{ & } v_3^{03}(p,s)$ | 18 |
| (h,s) | 1 | $p_1^{01}(h,s) \text{ & } T_1^{97}(p,h)$ | 23 |
| | 2 | $p_2^{01}(h,s) \text{ & } T_2^{97}(p,h)$ | 38 |
| | 3 | $p_3^{04}(h,s) \text{ & } T_3^{03}(p,h) \text{ & } v_3^{03}(p,s)$ | 10 |
| | 4 | $T_{\text{sat}}^{04}(h,s) \text{ & } p_{\text{sat}}^{97}(T) \text{ & } x = \frac{h-h'}{h''-h'}$ | 11 |
| (p,T) | 3 | $v_3(p,T)$ | 5 |

14th ICPWS, Kyoto, 2004

Computing Time in Comparison with IAPWS-IF97 Fundamental Equations

Boundary Equations

| Funct. | Bound. | Reg.-Reg. | Bound. Eq. | CTR |
|-------------------|----------|-----------|---------------------------------------|-----|
| (p,h) | $x = 0$ | 3 - 4 | $p_{3\text{sat}}^{03}(h)$ | 12 |
| | $x = 1$ | | | |
| (p,s) | $x = 0$ | 3 - 4 | $p_{3\text{sat}}^{03}(s)$ | 9 |
| | $x = 1$ | | | |
| (h,s) | $x = 0$ | 1 - 4 | $h_1^{04}(s)$ | 24 |
| | | 3 - 4 | $h_{3a}^{04}(s)$ | 90 |
| | $x = 1$ | 2 - 4 | $h_{2ab}^{04}(s), h_{2c3b}^{04}(s)$ | 20 |
| | | 3 - 4 | $h_{2c3b}^{04}(s)$ | 60 |
| | 623.15 K | 1 - 3 | $h_{B13}^{04}(s)$ | 37 |
| $p_{B23}^{97}(T)$ | 2 - 3 | | $T_{B23}^{04}(h,s), p_{2c}^{01}(h,s)$ | 20 |

Calculation of backward functions including determination of region boundaries

→ 5 ... 20 times faster than iteration of fundamental equations



Calculations of heat cycles, boilers and steam turbines may be 2... 3 times faster
when using the backward and boudary equations

14th ICPWS, Kyoto, 2004

Conclusions

- IAPWS provides backward and boundary equations for the functions of (p,h) , (p,s) , (h,s) and (p,T)
- The equations can be used as a supplement to the Industrial Formulation IAPWS-IF97.
- Their numerical consistencies are sufficient for most applications in heat-cycle, boiler, and steam-turbine calculations.
- Using the equations, the properties as functions of (p,T) , (p,h) , (p,s) , and (h,s) including determination of the region can be calculated without iterations.
- Resulting, process calculations will be between 2 and 3 times faster when using the supplementary backward and boundary equations.
- For applications where the demands on numerical consistency are extremely high, the equations can be used for calculating very accurate starting values in iterations.

14th ICPWS, Kyoto, 2004