



Hochschule
Zittau/Görlitz

UNIVERSITY OF APPLIED SCIENCES

Faculty of
MECHANICAL ENGINEERING

Department of
TECHNICAL THERMODYNAMICS

**Property Library for
the Industrial Formulation
IAPWS-IF97
for Water and Steam**

FluidTI with LibIF97

for

TI Nspire™ CX

TI Nspire™ CAS

TI Nspire™ CX CAS

Prof. Hans-Joachim Kretzschmar

Roberto Koche

Software for the Industrial-Formulation IAPWS-IF97 for Water and Steam

FluidTI

for the TI Nspire™ CX, TI Nspire™ CAS and TI Nspire™ CAS CX Pocket
Calculators

Contents

1. Property Functions for Water and Steam
2. Range of Validity and the FluidTI Program Structure
3. Application of FluidTI
 - 3.1 Installation of FluidTI onto the TI Nspire™ CAS, the TI Nspire™ CX and TI Nspire™ CAS CX Pocket Calculators
 - 3.2 Example: Calculation of $h = f(p, t, x)$ using FluidTI
 - 3.3 Uninstalling FluidTI
4. Program Documentation
5. References

For further pocket calculator software see the following link:

www.steamtables-pocket-calculators.com

For steam tables and further property libraries for Excel® and Mathcad® see the following link:

www.international-steam-tables.com

© Zittau/Goerlitz University of Applied Sciences, Germany
Faculty of Mechanical Engineering
Department of Technical Thermodynamics
Prof. Dr.-Ing. habil. H.-J. Kretzschmar
Dr.-Ing. I. Stoecker
Tel.: +49-3583-61-1846 or -1881
Fax: +49-3583-61-1846
Email: hj.kretzschmar@hs-zigr.de
Home page: www.thermodynamics-zittau.de

1. Property Functions for Water and Steam

The FluidTI program for the TI Nspire™ CAS Pocket Calculator contains the following functions for the calculation of thermodynamic properties of water and steam:

Functional Dependence	Name in FluidTI	Property or Function	Unit
$p_s = f(t)$	ps_t_97	Saturation pressure	MPa
$t_s = f(p)$	ts_p_97	Saturation temperature	°C
$v = f(p, t, x)$	v_ptx_97	Specific volume	m ³ /kg
$h = f(p, t, x)$	h_ptx_97	Specific enthalpy	kJ/kg
$s = f(p, t, x)$	s_ptx_97	Specific entropy	kJ/(kg · K)
$t = f(p, h)$	t_ph_97	Backward function: temperature from pressure and enthalpy	°C
$x = f(p, h)$	x_ph_97	Backward function: vapor fraction from pressure and enthalpy	kg/kg
$t = f(p, s)$	t_ps_97	Backward function: temperature from pressure and entropy	°C
$x = f(p, s)$	x_ps_97	Backward function: vapor fraction from pressure and entropy	kg/kg
$\eta = f(p, t, x)$	eta_ptx_97	Dynamic viscosity	Pa · s = kg/(m · s)
$\lambda = f(p, t, x)$	lambda_ptx_97	Thermal conductivity	W/(m · K)
$c_p = f(p, t, x)$	cp_ptx_97	Specific isobaric heat capacity	kJ/(kg · K)

Units: p in MPa
t in °C
x in kg saturated steam / kg wet steam

Range of Validity: IAPWS-IF97 regions 1 and 2, including wet steam

Pressure: from 0.000611 MPa up to 100 MPa

Temperature: from 0 °C up to 800 °C

Comment on the vapor fraction x and calculations for wet steam

The subprograms automatically deal with the wet steam region. For this purpose the following specifications for the vapor fraction x are to be regarded:

If the state point to be calculated is located within the single-phase regions (of liquid or superheated steam) enter either no input value, or -1 for the value of x . In this case, the backward functions will result in $x = -1$.

If the state point to be calculated is located within the two-phase region (wet steam), values between 0 and 1 have to be entered for the value of x ($x = 0$ for saturated liquid, $x = 1$ for saturated vapor). The backward functions result in values for x that range from 0 to 1.

In the case of wet steam it is adequate to put in either the value given for t and $p = -1$ (or no input value for p), or the given value for p and $t = -1$ (or no input value for t), as well as the value for x that ranges from 0 to 1.

If you enter p and t and x when calculating wet steam, the program considers p and t to meet the vapor-pressure curve. If this does not apply, an error message is displayed for the selected function to be calculated.

IAPWS-F97 wet steam region: $t = 0 \text{ °C} \dots t = 373.946 \text{ °C}$
 $p = 0.000611 \text{ MPa} \dots p = 22.064 \text{ MPa}$

Please note.

If the calculation results in -1, values have been entered outside the range of validity of the IAPWS-IF97 or they do not define a state point. In this case, an error message is displayed.

2. Range of Validity and the FluidTI Program Structure

The International Association for the Properties of Water and Steam (IAPWS) issued the IAPWS-IF97 Industrial Formulation for Thermodynamic Properties of Water and Steam in 1997. This standard must be applied worldwide in final warranty calculations for power plants which use water and steam as working fluid.

Figure 1 shows the range of validity of the equation set of the Industrial Formulation, fully named

"IAPWS Industrial Formulation 1997 for the Thermodynamic Properties
of Water and Steam",

abbreviated

"IAPWS-IF97".

The IAPWS-IF97 range of state includes temperatures from 0 °C up to 800 °C at pressures from 0.000611 up to 100 MPa and temperatures up to 2000 °C at pressures up to 50 MPa.

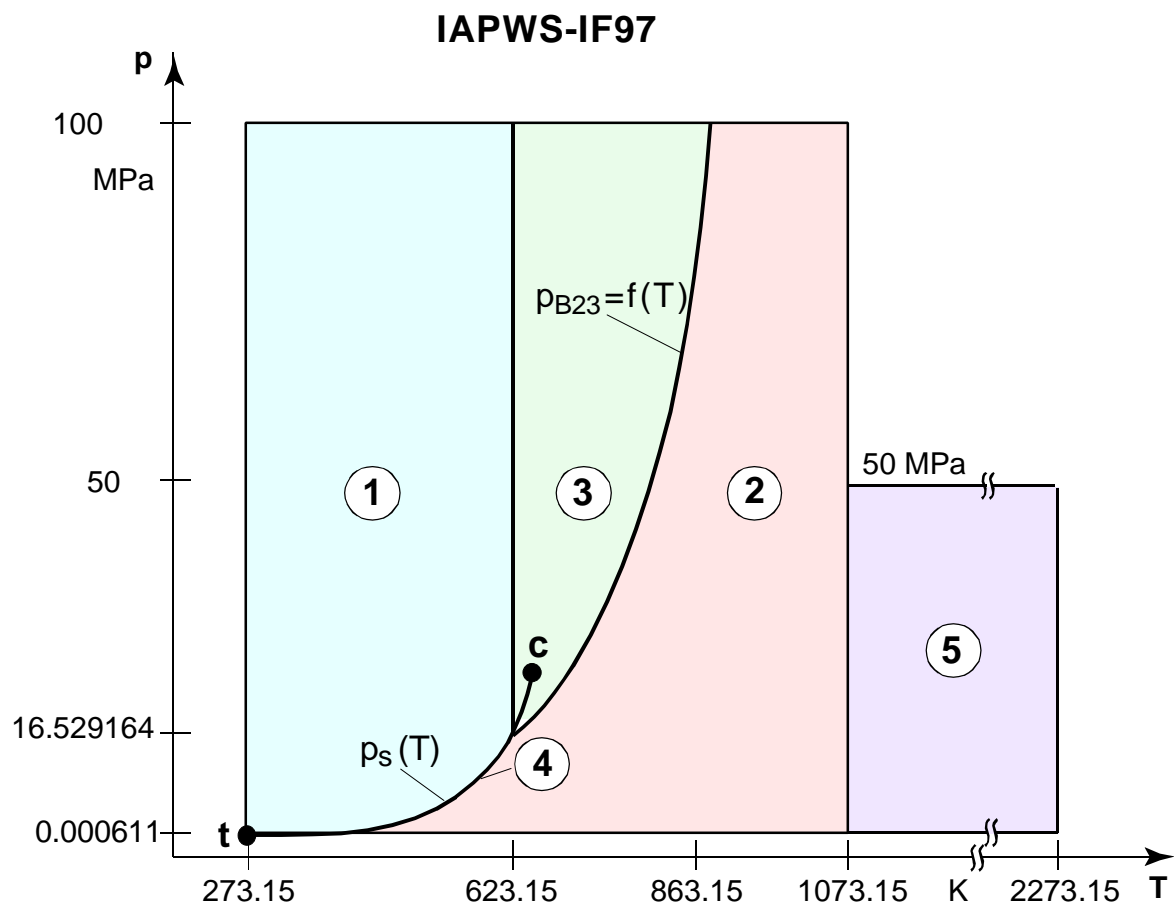


Figure 1: Entire IAPWS-IF97 range of validity

Internally, the entire range of validity is subdivided into five calculation regions in which the appropriate constitutive equations apply (cf. Fig. 1). Those are described in detail in the official IAPWS [1] release and in the publications by *Wagner et al.* [2] and [3].

The FluidTI version at hand is valid for the regions 1, 2, and the wet steam region (region 4) up to a pressure of 16.529164 MPa (cf. Figure 1). Their connection to the calculation equations is established according to the given quantities.

3. Application of FluidTI

3.1 Installation of FluidTI onto the TI Nspire™ Pocket Calculators

In order to run the FluidTI software on your pocket calculator, load the program from your computer into the calculator, using a special link program and the appropriate link cable.

The link program is available at service partners of Texas Instruments®, as well as the link cable, or can be downloaded from the TI web site:

http://education.ti.com/en/us/software/details/en/79881F1D740D4A92ADB342087887BE55/ti-nspirecas_pc_full.

The following description is valid for the

TI-Nspire™ CAS Student Software

link program which should have already been installed onto your computer.

(For another link program used for the file transfer see the corresponding user's guide or online-help.)

1. Insert the FluidTI CD into your CD-ROM drive. The CD contains the file listed in the following table:

TI Model	TI-Nspire™ CAS	TI-Nspire™ CX	TI-Nspire™ CAS CX
Group File	Water.tns	Water.tns	Water.tns

2. Connect the TI calculator to the PC using the USB cable.

3. Data Transfer with the TI-Nspire™ CAS Student Software

Make sure the TI calculator is switched on.

- Start the TI-Nspire™ CAS Student Software program on your computer.
- The "Welcome Screen" pops up, which can be closed.
- Click the "Content Explorer" in the "Documents Toolbox".

In this toolbox there are now two windows. The upper one displays your Computer and the other the connected handhelds.

- In the "Computer" window, you can now search the "water.tns" file to copy it by right-clicking.
- After you have selected the folder "MyLib" in the lower window, insert the file by right-clicking and paste.

The last step before the program can be used, is to refresh the libraries. You do this in the main screen, after you opened "My Documents" press the menu button and select "Refresh Libraries".


3.2 Example: Calculation of $h = f(p, t, x)$ using FluidTI

The specific enthalpy h as a function of pressure p , temperature t and vapor fraction x can be calculated for the Industrial Formulation IAPWS-IF97 on the TI Nspire™.



Please carry out the following steps:

- If the “Calculator” Page is active, press the “catalog”-button and choose the library by clicking the library-symbol and select the water file.
- Now, choose “h_ptx_97” and press the <ENTER> key.
- The command line “water\h_ptx_97() is displayed. Press <ENTER>.

The selected sub program of FluidTI is displayed:

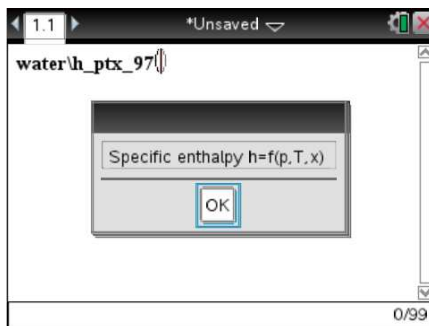

- The following three menus request the input of parameters:

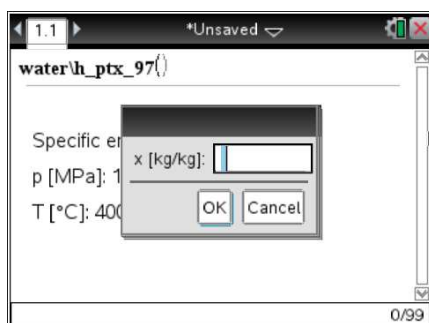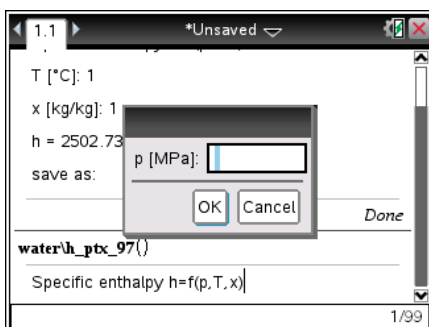

- Enter the given value for "p in MPa" into the appropriate window. Please consider the IAPWS-IF97 range of validity:

$$p = 0.000611 \text{ MPa} \dots 100 \text{ MPa.}$$

→ E.g.: Enter the value 10 and move the cursor to the next input field.

- Enter the value given for "t in °C" into the appropriate window. Please consider the IAPWS-IF97 range of validity:

$$t = 0 \text{ °C} \dots 800 \text{ °C.}$$

→ E.g.: Enter the value 400, and move the cursor to the next input field.

- Now, the value for the vapor fraction x in (kg saturated steam/kg wet steam) is to be entered into the appropriate window. Consider the following specifications:

If the state point to be calculated is located within the single-phase regions (of liquid or superheated steam) enter either no input value, or -1 for the value of x . In this case, the backward functions will result in $x = -1$.

If the state point to be calculated is located within the two-phase region (wet steam), values between 0 and 1 have to be entered for the value of x ($x = 0$ for saturated liquid, $x = 1$ for saturated vapor). The backward functions result in values for x that range from 0 to 1.

In the case of wet steam it is adequate to put in either the value given for t and $p = -1$ (or no input value for p), or the given value for p and $t = -1$ (or no input value for t), as well as the value for x that ranges from 0 to 1.


If you enter p and t and x when calculating wet steam, the program considers p and t to meet the vapor-pressure curve. If this does not apply, an error message is displayed for the selected function to be calculated.

IAPWS-IF97 wet steam region: $t = 0 \text{ °C} \dots t = 373.946 \text{ °C}$
 $p = 0.000611 \text{ MPa} \dots p = 22.064 \text{ MPa}$

→ Press <ENTER> only, because in the example the state point is located in the single-phase region.

Now the calculation starts.

- After the calculation has been finished the result for h in kJ/kg is displayed:

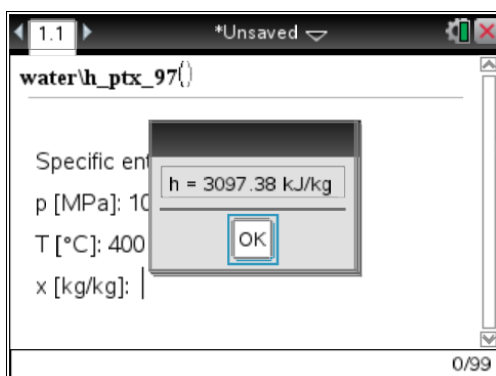


→ In the example, the function calculation results in 3097.38 kJ/kg.

- The calculation of $h = f(p, t, x)$ is now complete.

The calculated value for h can be saved as a variable and used in other calculations with the pocket computer.

→ E.g.: Enter the variable name "h" into the "save as:" window and press <ENTER> twice:

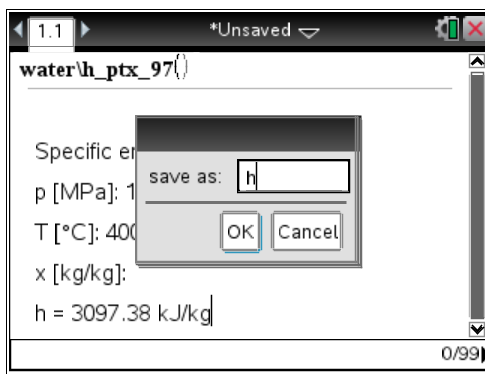

Note.

For the variable any name can be chosen, except for those which start with the ω (Omega)-symbol and system variables (cf. TI Handbook).


In general, variables beginning with the ω -symbol must not be used within the FLUIDTI programs.

3.3 Uninstalling FluidTI


Please carry out the following steps:

1. Open the menu “My Documents” in the main menu.


The following menu will be displayed:

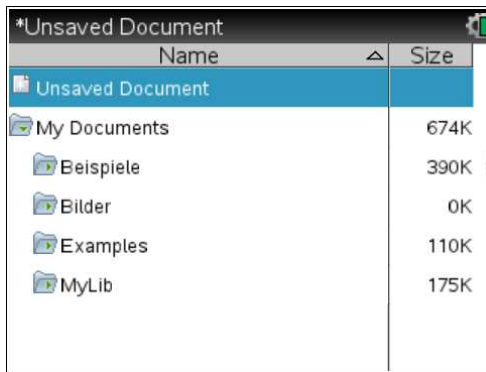

2. Select “MyLib” and press enter.

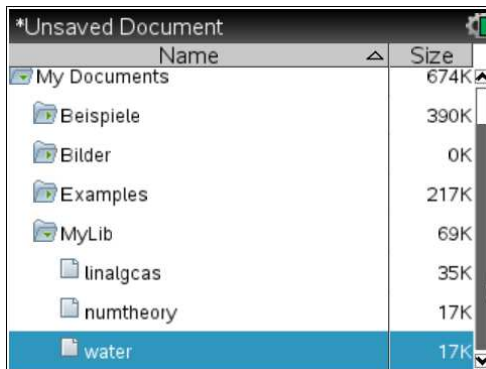

3. Press the “del” button after selecting the water file and confirm the following query.

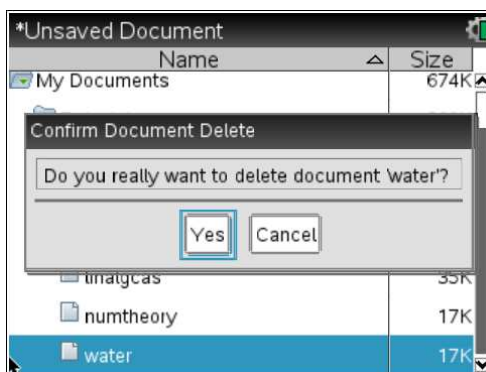

FluidTI has been removed successfully.

4. Program Documentation

Saturation Pressure $p_s = f(t)$

Name in FluidTI: ps_t_97

Input

t - Temperature t in °C

Output

ps(t) - Saturation pressure p_s in MPa

Range of validity

from $t_t = 0$ °C up to $t_c = 373.946$ °C

Response on faulty input values

Error message "Out of Range!" for the following input values:

$t < 0$ °C or $t > 373.946$ °C

References: [1], [2], [3]

Saturation Temperature $t_s = f(p)$

Name in FluidTI: ts_p_97

Input

p - Pressure of p in MPa

Output

ts(p) - Saturation temperature t_s in °C

Range of validity

from $p_t = 0.000611$ MPa up to $p = 22.064$ MPa

Response on faulty input values

Error message "Out of Range!" for the following input values:

$p < 0.000611$ MPa or $p > 22.064$ MPa

References: [1], [2], [3]

Specific Volume $v = f(p, t, x)$

Name in FluidTI: v_ptx_97

Input

p - Pressure p in MPa

t - Temperature t in °C

x - Vapor fraction x in (kg saturated steam)/(kg wet steam)

Output

v(p,t,x) - Specific volume v in m³/kg

Range of validity

Liquid region: $p = p_s(t) \dots 100 \text{ MPa}$ at $0 \text{ °C} \dots 350 \text{ °C}$

Steam region: $0.000611 \text{ MPa} \dots p = p_s(t)$ at $0 \text{ °C} \dots 350 \text{ °C}$

$0.000611 \text{ MPa} \dots p_{23}(t) = p(s=5.2 \text{ kJ}/(\text{kg K}))$ at $350 \text{ °C} \dots 590 \text{ °C}$

$0.000611 \text{ MPa} \dots 100 \text{ MPa}$ at $590 \text{ °C} \dots 800 \text{ °C}$

Comment on the vapor fraction x and calculations for wet steam

The subprograms automatically deal with the wet steam region. For this purpose the following specifications for the vapor fraction x are to be regarded:

- If the state point to be calculated is located within the single-phase region (of liquid or superheated steam) enter the value $x = -1$. Pressure p and temperature t are given.
- When calculating wet steam the value of x to be entered ranges from 0 to 1 (in case of boiling liquid: $x = 0$; in case of saturated vapor: $x = 1$).

In the case of wet steam it is adequate to put in either the value given for t and $p = -1$, or the given value for p and $t = -1$, as well as the value for x which ranges from 0 to 1.

If you enter p and t and x when calculating wet steam, the program considers p and t to meet the vapor-pressure curve. If this does not apply, the selected function to be calculated results in -1.

Wet steam region: $t = 0 \text{ °C} \dots 350 \text{ °C}$

$p = 0.000611 \text{ MPa} \dots 16.5292 \text{ MPa}$

Response on faulty input values

Error message "Out of Range!" for the following input values:

Single-phase region: the parameters entered are located outside the above mentioned ($x = -1$) range of validity

Wet steam region:

($0 \leq x \leq 1$) at $t = -1$ and $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$ or
 at $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$
 and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$
 at $|t - t_s(p)| > 0.1 \text{ K}$

References: [1], [2], [3]

Specific Enthalpy $h = f(p, t, x)$

Name in FluidTI: h_ptx_97

Input

- p** - Pressure p in MPa
- t** - Temperature t in °C
- x** - Vapor fraction x in (kg saturated steam)/(kg wet steam)

Output

h(p,t,x) - Specific enthalpy h in kJ/kg

Range of validity

- Liquid region: $p = p_s(t) \dots 100 \text{ MPa}$ at $0 \text{ °C} \dots 350 \text{ °C}$
- Steam region: $0.000611 \text{ MPa} \dots p = p_s(t)$ at $0 \text{ °C} \dots 350 \text{ °C}$
 $0.000611 \text{ MPa} \dots p_{23}(t) = p(s=5.2 \text{ kJ/(kg K)})$ at $350 \text{ °C} \dots 590 \text{ °C}$
 $0.000611 \text{ MPa} \dots 100 \text{ MPa}$ at $590 \text{ °C} \dots 800 \text{ °C}$

Comment on the vapor fraction x and calculations for wet steam

The subprograms automatically deal with the wet steam region. For this purpose the following specifications for the vapor fraction x are to be regarded:

- If the state point to be calculated is located within the single-phase region (of liquid or superheated steam) enter the value $x = -1$. Pressure p and temperature t are given.
- When calculating wet steam the value of x to be entered ranges from 0 to 1 (in case of boiling liquid: $x = 0$; in case of saturated vapor: $x = 1$).

In the case of wet steam it is adequate to put in either the value given for t and $p = -1$, or the given value for p and $t = -1$, as well as the value for x which ranges from 0 to 1.

If you enter p and t and x when calculating wet steam, the program considers p and t to meet the vapor-pressure curve. If this does not apply, the selected function to be calculated results in -1.

Wet steam region: $t = 0 \text{ °C} \dots 350 \text{ °C}$
 $p = 0.000611 \text{ MPa} \dots 16.5292 \text{ MPa}$

Response on faulty input values

Error message "Out of Range!" for the following input values:

Single-phase region: the parameters entered are located outside the above mentioned range of validity ($x = -1$)

Wet steam region: at $p = -1$ and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$ or
 ($0 \leq x \leq 1$) at $t = -1$ and $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$ or
 at $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$
 and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$
 at $|t - t_s(p)| > 0.1 \text{ K}$

References: [1], [2], [3]

Specific Entropy $s = f(p, t, x)$

Name in FluidTI: s_ptx_97

Input

- p - Pressure p in MPa
- t - Temperature t in °C
- x - Vapor fraction x in (kg saturated steam)/(kg wet steam)

Output

$s(p, t, x)$ - Specific entropy s in kJ/(kg K)

Range of validity

- Liquid region: $p = p_s(t) \dots 100 \text{ MPa}$ for $0 \text{ °C} \dots 350 \text{ °C}$
- Steam region: $0.000611 \text{ MPa} \dots p = p_s(t)$ for $0 \text{ °C} \dots 350 \text{ °C}$
 $0.000611 \text{ MPa} \dots p_{23}(t) = p(s=5.2 \text{ kJ/(kg K)})$ for $350 \text{ °C} \dots 590 \text{ °C}$
 $0.000611 \text{ MPa} \dots 100 \text{ MPa}$ for $590 \text{ °C} \dots 800 \text{ °C}$

Comment on the vapor fraction x and calculations for wet steam

The subprograms automatically deal with the wet steam region. For this purpose the following specifications for the vapor fraction x are to be regarded:

- If the state point to be calculated is located within the single-phase region (of liquid or superheated steam) enter the value $x = -1$. Pressure p and temperature t are given.
- When calculating wet steam the value of x to be entered ranges from 0 to 1 (in case of boiling liquid: $x = 0$; in case of saturated vapor: $x = 1$).

In the case of wet steam it is adequate to put in either the value given for t and $p = -1$, or the given value for p and $t = -1$, as well as the value for x which ranges from 0 to 1.

If you enter p and t and x when calculating wet steam, the program considers p and t to meet the vapor-pressure curve. If this does not apply, the selected function to be calculated results in -1.

Wet steam region: $t = 0 \text{ °C} \dots 350 \text{ °C}$
 $p = 0.000611 \text{ MPa} \dots 16.5292 \text{ MPa}$

Response on faulty input values

Error message "Out of Range!" for the following input values:

Single-phase region: the parameters entered are located outside the above mentioned ($x = -1$) range of validity

Wet steam region: at $p = -1$ and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$ or
 ($0 \leq x \leq 1$) at $t = -1$ and $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$ or
 at $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$
 and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$
 at $|t - t_s(p)| > 0.1 \text{ K}$

References: [1], [2], [3]

Backward Function: Temperature $t = f(p,h)$

Name in FluidTI: t_ph_97

Input

p - Pressure p in MPa
h - Specific enthalpy h in kJ/kg

Output

t(p,h) - Temperature t in °C

Range of validity

Liquid region: IAPWS-IF97 region 1 (Figure 1)
 Steam region: IAPWS-IF97 region 2 (Figure 1)
 Wet steam region: $p = 0.000611 \dots 16.5292$ MPa and $h'(p) < h < h''(p)$

Comment on the calculations for wet steam

The subprogram automatically calculates the wet steam region. That is, the program checks, with reference to the given values of p and h , whether the state point to be calculated is located in the single-phase region (liquid or steam) or the wet steam region. The calculation is carried out for the appropriate region.

Response on faulty input values

Error message "Out of Range!" for the following input values:

Liquid region: at values of p and h beyond the IAPWS-IF97 region 1 (Figure 1)
 Steam region: at values of p and h beyond the IAPWS-IF97 region 2 (Figure 1)
 Wet steam region: at values of $p > 16.5292$ MPa or $p < 0.000611$ MPa

References: [1], [2], [3]

Backward Function: Temperature $t = f(p,s)$

Name in FluidTI: t_ps_97

Input

p - Pressure p in MPa
s - Specific entropy s in kJ/(kg K)

Output

t(p,s) - Temperature t in °C

Range of validity

Liquid region: IAPWS-IF97 region 1 (Figure 1)
 Steam region: IAPWS-IF97 region 2 (Figure 1)
 Wet steam region: $p = 0.000611 \dots 16.5292$ MPa

Comment on the calculations for wet steam

The subprogram automatically calculates the wet steam region. That is, the program checks, with reference to the given values of p and h , whether the state point to be calculated is located in the single-phase region (liquid or steam) or the wet steam region. The calculation is carried out for the appropriate region.

Response on faulty input values

Error message "Out of Range!" for the following input values:

Liquid region: at values of p and s beyond the IAPWS-IF97 region 1 (Figure 1)
 Steam region: at values of p and s beyond the IAPWS-IF97 region 2 (Figure 1)
 Wet steam region: at values of $p > 16.5292$ MPa or $p < 0.000611$ MPa

References: [1], [2], [3]

Backward Function: Vapor Fraction $x = f(p, h)$

Name in FluidTI: x_ph_97

Input

p - Pressure p in MPa
h - Specific enthalpy h in kJ/kg

Output

x(p,h) - Vapor fraction x in (kg saturated steam)/(kg wet steam)

Range of validity

Liquid region: IAPWS-IF97 region 1 (Figure 1)
 Steam region: IAPWS-IF97 region 2 (Figure 1)
 Wet steam region: $p = 0.000611 \dots 16.5292$ MPa and $h'(p) < h < h''(p)$

Comment on the calculations for wet steam

The subprogram automatically calculates the wet steam region. That is, the program checks, with reference to the given values of p and h , whether the state point to be calculated is located in the single-phase region (liquid or steam) or the wet steam region. In case of wet steam the value of x is calculated. If the state point to be calculated is located in the single-phase region the vapor fraction result is $x = -1$.

Response on faulty input values

If the state point to be calculated is located in the single-phase region the result $x(p, h) = -1$ is displayed for the following input values:

$$p > 16.5292 \text{ MPa or } h < h'(p) \text{ or } h > h''(p)$$

Error message "Out of Range!" for the following input values:

$$p < 0.000611 \text{ MPa or } p > 100 \text{ MPa}$$

References: [1], [2], [3]

Backward function: Vapor Fraction $x = f(p,s)$

Name in FluidTI: x_ps_97

Input

- p** - Pressure p in MPa
- s** - Specific entropy s in kJ/(kg K)

Output

$x(p,s)$ - Vapor fraction x in (kg saturated steam)/(kg wet steam)

Range of validity

- Liquid region: IAPWS-IF97 region 1 (Figure 1)
- Steam region: IAPWS-IF97 region 2 (Figure 1)
- Wet steam region: $p = 0.000611 \dots 16.5292$ MPa and $s'(p) < s < s''(p)$

Comment on the calculations for wet steam

The subprogram automatically calculates the wet steam region. That is, the program checks, with reference to the given values of p and h , whether the state point to be calculated is located in the single-phase region (liquid or steam) or the wet steam region. In case of wet steam the value of x is calculated. If the state point to be calculated is located in the single-phase region the vapor fraction result is $x = -1$.

Response on faulty input values

If the state point to be calculated is located in the single-phase region the result $x(p,h) = -1$ occurs for the following input values:

$$p > 16.5292 \text{ MPa or } s < s'(p) \text{ or } s > s''(p)$$

Error message "Out of Range!" for the following input values:

$$p < 0.000611 \text{ MPa or } p > 100 \text{ MPa}$$

References: [1], [2], [3]

Dynamic Viscosity $\eta = f(p, t, x)$

Name in FluidTI: eta_ptx_97

Input

p - Pressure p in MPa

t - Temperature t in °C

x - Vapor fraction x in (kg saturated steam)/(kg wet steam)

Output

$\eta(p, t, x)$ - Dynamic viscosity η in MPa s

Range of validity

Liquid region: $p = p_s(t) \dots 100 \text{ MPa}$ for $0 \text{ °C} \dots 350 \text{ °C}$

Steam region: $0.000611 \text{ MPa} \dots p = p_s(t)$ for $0 \text{ °C} \dots 350 \text{ °C}$

$0.000611 \text{ MPa} \dots p_{23}(t) = p(s=5.2 \text{ kJ}/(\text{kg K}))$ for $350 \text{ °C} \dots 590 \text{ °C}$

$0.000611 \text{ MPa} \dots 100 \text{ MPa}$ for $590 \text{ °C} \dots 800 \text{ °C}$

Comment on the vapor fraction x and calculations for wet steam

The subprograms automatically deal with the wet steam region. For this purpose the following specifications for the vapor fraction x are to be regarded:

- If the state point to be calculated is located within the single-phase region (of liquid or superheated steam) enter the value $x = -1$. Pressure p and temperature t are given.
- When calculating wet steam the value of x to be entered ranges from 0 to 1 (in case of boiling liquid: $x = 0$; in case of saturated vapor: $x = 1$).

In the case of wet steam it is adequate to put in either the value given for t and $p = -1$, or the given value for p and $t = -1$, as well as the value for x which ranges from 0 to 1.

If you enter p and t and x when calculating wet steam, the program considers p and t to meet the vapor-pressure curve. If this does not apply, the selected function to be calculated results in -1.

Saturated liquid and saturated vapor:

$t = 0 \text{ °C} \dots 350 \text{ °C}$

$p = 0.000611 \text{ MPa} \dots 16.5292 \text{ MPa}$

Response on faulty input values

Error message "Out of Range!" for the following input values:

Single-phase region: the parameters entered are located outside the above mentioned range of validity ($x = -1$)

Saturated liquid and saturated vapor:

($x = 0$ or $x = 1$)

at $p = -1$ and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$ or

at $t = -1$ and $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$ or

at $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$

and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$

at $|t - t_s(p)| > 0.1 \text{ K}$

References: [5], internal calculation of p or v : [1], [2], [3]

Thermal Conductivity $\lambda = f(p, t, x)$

Name in FluidTI: lambda_ptx_97

Input

p - Pressure p in MPa

t - Temperature t in °C

x - Vapor fraction x in (kg saturated steam)/(kg wet steam)

Output

lam(p,t,x) - Thermal conductivity λ in W/(m K)

Range of validity

Liquid region: $p = p_s(t) \dots 100 \text{ MPa}$ for $0 \text{ °C} \dots 350 \text{ °C}$

Steam region: $0.000611 \text{ MPa} \dots p = p_s(t)$ for $0 \text{ °C} \dots 350 \text{ °C}$

$0.000611 \text{ MPa} \dots p_{23}(t) = p(s=5.2 \text{ kJ}/(\text{kg K}))$ for $350 \text{ °C} \dots 590 \text{ °C}$

$0.000611 \text{ MPa} \dots 100 \text{ MPa}$ for $590 \text{ °C} \dots 800 \text{ °C}$

Comment on the vapor fraction x and calculations for wet steam

The subprograms automatically deal with the wet steam region. For this purpose the following specifications for the vapor fraction x are to be regarded:

- If the state point to be calculated is located within the single-phase region (of liquid or superheated steam) enter the value $x = -1$. Pressure p and temperature t are given.
- When calculating wet steam the value of x to be entered ranges from 0 to 1 (in case of boiling liquid: $x = 0$; in case of saturated vapor: $x = 1$).

In the case of wet steam it is adequate to put in either the value given for t and $p = -1$, or the given value for p and $t = -1$, as well as the value for x which ranges from 0 to 1.

If you enter p and t and x when calculating wet steam, the program considers p and t to meet the vapor-pressure curve. If this does not apply, the selected function to be calculated results in -1.

Saturated liquid and saturated vapor: $t = 0 \text{ °C} \dots 350 \text{ °C}$

$p = 0.000611 \text{ MPa} \dots 16.5292 \text{ MPa}$

Response on faulty input values

Error message "Out of Range!" for the following input values:

Single-phase region: the parameters entered are located outside the above mentioned range of validity ($x = -1$)

Saturated liquid and saturated vapor: ($x = 0$ or $x = 1$)

- at $p = -1$ and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$ or
- at $t = -1$ and $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$ or
- at $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$
- and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$
- at $|t - t_s(p)| > 0.1 \text{ K}$

References: [5], internal calculation of p or v : [1], [2], [3]

Specific Isobaric Heat Capacity $c_p = f(p, t, x)$

Name in FluidTI: cp_ptx_97

Input

p - Pressure p in MPa

t - Temperature t in °C

x - Vapor fraction x in (kg saturated steam)/(kg wet steam)

Output

cp(p,t,x) - Specific isobaric heat capacity c_p in kJ/kg K

Range of validity

Liquid region: $p = p_s(t) \dots 100 \text{ MPa}$ at $0 \text{ °C} \dots 350 \text{ °C}$

Steam region: $0.000611 \text{ MPa} \dots p = p_s(t)$ at $0 \text{ °C} \dots 350 \text{ °C}$

$0.000611 \text{ MPa} \dots p_{23}(t) = p(s=5.2 \text{ kJ/(kg K)})$ at $350 \text{ °C} \dots 590 \text{ °C}$

$0.000611 \text{ MPa} \dots 100 \text{ MPa}$ at $590 \text{ °C} \dots 800 \text{ °C}$

Comment on the vapor fraction x and calculations for wet steam

The subprograms automatically deal with the wet steam region. For this purpose the following specifications for the vapor fraction x are to be regarded:

- If the state point to be calculated is located within the single-phase region (of liquid or superheated steam) enter the value $x = -1$. Pressure p and temperature t are given.
- When calculating wet steam the value of x to be entered ranges from 0 to 1 (in case of boiling liquid: $x = 0$; in case of saturated vapor: $x = 1$).

In the case of wet steam it is adequate to put in either the value given for t and $p = -1$, or the given value for p and $t = -1$, as well as the value for x which ranges from 0 to 1.

If you enter p and t and x when calculating wet steam, the program considers p and t to meet the vapor-pressure curve. If this does not apply, the selected function to be calculated results in -1.

Saturated liquid and saturated vapor: $t = 0 \text{ °C} \dots 350 \text{ °C}$

$p = 0.000611 \text{ MPa} \dots 16.5292 \text{ MPa}$

Response on faulty input values

Error message "Out of Range!" for the following input values:

Single-phase region: the parameters entered are located outside the above mentioned ($x = -1$) range of validity

Saturated liquid and saturated vapor: ($x = 0$ or $x = 1$)

- at $p = -1$ and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$ or
- at $t = -1$ and $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$ or
- at $p > 16.5292 \text{ MPa}$ or $p < 0.000611 \text{ MPa}$
- and $t > 350 \text{ °C}$ or $t < 0 \text{ °C}$
- at $|t - t_s(p)| > 0.1 \text{ K}$

References: [1], [2], [3]

5. References

- [1] International Association for the Properties of Water and Steam:
Revised Release on the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam IAPWS-IF97.
IAPWS Secretariat (2007), Available at: www.iapws.org

- [2] Wagner, W.; Kretzschmar, H.-J.:
International Steam Tables.
Springer-Verlag, Berlin (2008)

- [3] Kretzschmar, H.-J.:
Mollier h-s Diagram.
Springer-Verlag, Berlin (2013)

- [4] International Association for the Properties of Water and Steam:
Revised Release on the IAPS Formulation 1985 for the Thermal Conductivity of Ordinary Water Substance.
IAPWS Secretariat (1985), Available at: www.iapws.org

- [5] International Association for the Properties of Water and Steam:
Revised Release on the IAPS Formulation 1985 for the Viscosity of Ordinary Water Substance.
IAPWS Secretariat (1985), Available at: www.iapws.org