

# **Property Library for Carbon Dioxide**

**FluidVIEW  
with LibCO2  
for LabVIEW™**

Prof. Hans-Joachim Kretzschmar  
Dr. Sebastian Herrmann  
Dr. Matthias Kunick  
S. Hasch  
F. Elschner

# **Property Library of Ammonia-Water Mixtures**

## **Including DLL and Add-on for LabVIEW™**

### **FluidVIEW**

### **LibCO2**

## **Contents**

- 0. Package Contents
  - 0.1 Zip-files for 32-bit LabVIEW™
  - 0.2 Zip-files for 64-bit LabVIEW™
- 1. Property Functions
- 2. Application of FluidVIEW in LabVIEW™
  - 2.1 Installing FluidVIEW
  - 2.2 The FluidVIEW Help System
  - 2.3 Licensing the LibCO2 Property Library
  - 2.4 Example calculation
  - 2.5 Removing FluidVIEW
- 3. Program Documentation
- 4. Property Libraries for Calculating Heat Cycles, Boilers, Turbines, and Refrigerators
- 5. References
- 6. Satisfied Customers

---

© KCE-ThermoFluidProperties  
Professor Hans-Joachim Kretzschmar  
Wallotstr. 3, 01307 Dresden, Germany  
Phone: +49-351-27597860  
Mobile: +49-172-7914607  
Fax: +49-3222-1095810  
Email: [info@thermofluidprop.com](mailto:info@thermofluidprop.com)  
Internet: [www.thermofluidprop.com](http://www.thermofluidprop.com)

## 0 Package Contents

### 0.1 Zip files for 32-bit LabVIEW™

In order to install FluidVIEW on a computer running a 32-bit version of LabVIEW™ the zip file **CD\_FluidVIEW\_LibCO2.zip** is delivered. The directory structure of the archive is corresponding to the default directory of LabVIEW™.

The effects of the fifteen files, which are stored in the different directories of the zip archive, are shown in the Tables 0.1, 0.2, 0.3 and 0.4.

**Table 0.1** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\vi.lib**  
**\FluidVIEWLibCO2**

Filename	Effects
LibCO2.lib	LabVIEW™ library file, containing every function of the LibCO2 property library in the form of subprograms (SubVIs)

**Table 0.2** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\menus**  
**\Categories\FluidVIEW**

Filename	Effects
dir.mnu	The palette view of LabVIEW™ is based on the palette files (*.mnu). They include the palette data (e. g. the display name, the palette icon, the palette description, the help information, the synchronize information and the items)

**Table 0.3** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\source**

Filename	Effects
LibCO2.dll	Dynamic-link library containing the algorithms for the calculation of the property functions of carbon dioxide
advapi32.dll	Runtime library
Dformd.dll	Runtime library for the Fortran DLL
Dfortrt.dll	Runtime library for the Fortran DLL
LC.dll	Auxiliary library
msvcp60.dll	Runtime library
msvcrt.dll	Runtime library

**Table 0.4** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\help \FluidVIEW-help**

Filename	Effects
FluidVIEW_LibCO2.pdf	User's guide of the property library LibCO2 for the LabVIEW™ Add-On FluidVIEW
LibCO2.chm	Help file with descriptions for each function
OpenLibCO2_doc.vi	LabVIEW™ instrument to open the user's guide via the help menu
LibCO2.txt	Text file to change the name of the menu item of the help file
OpenLibCO2_doc.txt	Text file to change the name of the menu item of the file OpenLibCO2_doc.vi

## 0.2 Zip files for 64-bit LabVIEW™

In order to install FluidVIEW on a computer running a 64-bit version of LabVIEW™ the zip file **CD\_FluidVIEW\_LibCO2\_x64.zip** is delivered. The directory structure of the archive is corresponding to the default directory of LabVIEW™.

The effects of the fifteen files, which are stored in the different directories of the zip archive, are shown in the Tables 0.5, 0.6, 0.7, 0.8 and 0.9.

**Table 0.5** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\_x64\vi.lib \FluidVIEWLibCO2**

Filename	Effects
LibCO2.llb	LabVIEW™ library file, containing every function of the LibCO2 property library in the form of subprograms (SubVIs)

**Table 0.6** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\_x64\menus \Categories\FluidVIEW**

Filename	Effects
dir.mnu	The palette view of LabVIEW™ is based on the palette files (*.mnu). They include the palette data (e. g. the display name, the palette icon, the palette description, the help information, the synchronize information and the items)

**Table 0.7** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\_x64\source**

Filename	Effects
LibCO2.dll	Dynamic-link library containing the algorithms for the calculation of the property functions of carbon dioxide
Capt_ico_big.ico	Icon file
Libmmd.dll	Runtime library
Libifcoremd.dll	Runtime library
LC.dll	Auxiliary library
Libiomp5md.dll	Runtime library

**Table 0.8** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\_x64\help \FluidVIEW-help**

Filename	Effects
FluidVIEW_LibCO2.pdf	User's guide of the LibCO2 property library for the LabVIEW™ Add-On FluidVIEW
LibCO2.chm	Help file with descriptions for each function
OpenLibCO2_doc.vi	LabVIEW™ instrument to open the user's guide via the help menu
LibCO2.txt	Text file to change the name of the menu item of the help file
OpenLibCO2_doc.txt	Text file to change the name of the menu item of the file OpenLibCO2_doc.vi


**Table 0.9** Effects of the files located in the archive directory **CD\_FluidVIEW\_LibCO2\_x64 \vcredist\_x64**

Filename	Effects
vcredist_x64.exe	Executable file to install the Microsoft Visual C++ 2008 Redistributable Package (x64). Within runtime components of Visual C++ Libraries required to run 64-bit applications developed with Visual C++ on a computer that does not have Visual C++ 2010 installed.

# 1. Property Functions

**Units:**  $t$  in °C  
 $p$  in bar  
 $x$  in kg /kg (Phase fraction, see the following explanations)

**Range of Validity:**

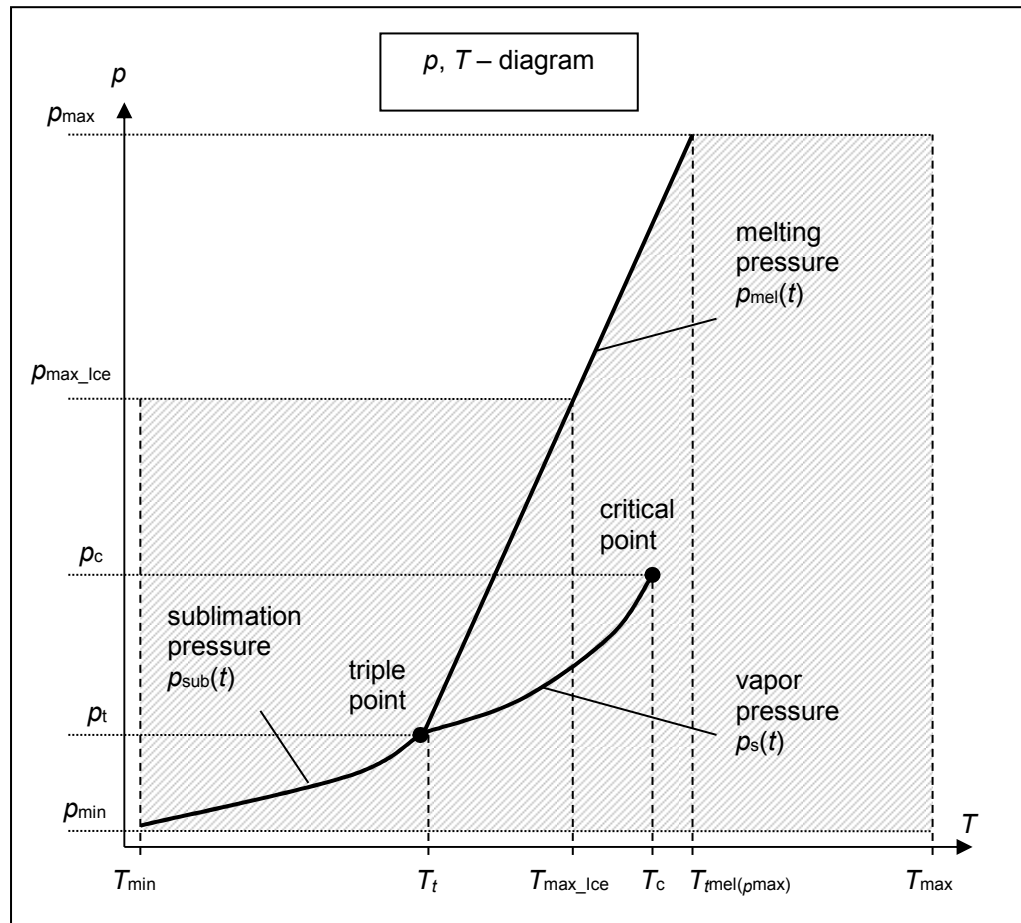

## Reference State:

At  $p = 1.01325$  bar and  $T = 298.15$  K (25 °C) :  
 $h = -0.938457860$  kJ/kg and  $s = -0.00219606205$  kJ/(kg K)

Factor	Abbreviation	Value and Unit
Minimum temperature	$T_{min}(t_{min})$	85 K (−188.15 °C)
Maximum temperature	$T_{max}(t_{max})$	1500 K (1226.85 °C)
Triple temperature	$T_t(t_t)$	216.592 K (−56.558 °C)
Temperature at the critical point	$T_c(t_c)$	304.1282 K (30.9782 °C)
Maximum temperature of solid region	$T_{max\_Ice}(t_{max\_Ice})$	236.0309 K (−37.119 °C)
Maximum temperature of melting pressure curve	$T_{mel}(p_{max})(t_{mel}(p_{max}))$	327.671 K (54.521 °C)
Minimum pressure	$p_{min} = p_{sub}(T_{min})$	$2.9081875815 \cdot 10^{-10}$ bar
Maximum pressure	$p_{max}$	8000 bar
Triple pressure	$p_t$	5.179618369088 bar
Pressure at the critical point	$p_c$	73.773 bar
Maximum pressure of solid region	$p_{max\_Ice}$	1000 bar

### General Property Functions

Functional Dependence	Function Name	Call from Fortran program	Call from the DLL LibCO2 as Parameter	Property or Function	Unit of the Result
$a = f(p, t, x)$	a_ptx_CO2	APTXXCO2(P,T,X)	C_APTXXCO2(A,P,T,X)	Thermal diffusivity	m <sup>2</sup> /s
$c_p = f(p, t, x)$	cp_ptx_CO2	CPPTXXCO2(P,T,X)	C_CPPTXXCO2(CP,P,T,X)	Specific isobaric heat capacity	kJ/(kg K)
$\eta = f(p, t, x)$	eta_ptx_CO2	ETAPTXCO2(P,T,X)	C_ETAPTXCO2(ETA,P,T,X)	Dynamic viscosity	Pa s
$h = f(p, t, x)$	h_ptx_CO2	HPTXXCO2(P,T,X)	C_HPTXXCO2(H,P,T,X)	Specific enthalpy	kJ/kg
$\kappa = f(p, t, x)$	kappa_ptx_CO2	KAPTXCO2(P,T,X)	C_KAPTXCO2(KAP,P,T,X)	Isentropic exponent	-
$\lambda = f(p, t, x)$	lambda_ptx_CO2	LAMPTCO2(P,T,X)	C_LAMPTXXCO2(LAM,P,T,X)	Thermal conductivity	W/(m K)
$\nu = f(p, t, x)$	ny_ptx_CO2	NYPTXXCO2(P,T,X)	C_NYPTXXCO2(NY,P,T,X)	Kinematic viscosity	m <sup>2</sup> /s
$p_{\text{mel}} = f(t)$	pmel_t_CO2	PMELCO2(T)	C_PMELCO2(PMEL,T)	Melting pressure from temperature	bar
$p_{\text{sub}} = f(t)$	psub_t_CO2	PSUBCO2(T)	C_PSUBCO2(PSUB,T)	Sublimation pressure from temperature	bar
$p_s = f(t)$	ps_t_CO2	PSTCO2(T)	C_PSTCO2(PS,T)	Vapor pressure from temperature	bar
$Pr = f(p, t, x)$	Pr_ptx_CO2	PRPTXXCO2(P,T,X)	C_PRPTXXCO2(PR,P,T,X)	Prandtl-Number	-
$\rho = f(p, t, x)$	rho_ptx_CO2	ROPTXXCO2(P,T,X)	C_ROPTXXCO2(RHO,P,T,X)	Density	kg/ m <sup>3</sup>
$s = f(p, t, x)$	s_ptx_CO2	SPTXXCO2(P,T,X)	C_SPTXXCO2(S,P,T,X)	Specific entropy	kJ/(kg K)
$t = f(p, h)$	t_ph_CO2	TPHCO2(P,H)	C_TPHCO2(T,P,H)	Backward function: Temperature from pressure and enthalpy	°C
$t = f(p, s)$	t_ps_CO2	TPSCO2(P,S)	C_TPSCO2(T,P,S)	Backward function: Temperature from pressure and entropy	°C

Functional Dependence	Function Name	Call from Fortran program	Call from the DLL LibCO2 as Parameter	Property or Function	Unit of the Result
$t_{\text{mel}} = f(p)$	tmel_p_CO2	TMELCO2(P)	C_TMELCO2(TMEL,P)	Melting temperature from pressure	°C
$t_{\text{sub}} = f(p)$	tsub_p_CO2	TSUBCO2(P)	C_TSUBCO2(TSUB,P)	Sublimation temperature from pressure	°C
$t_s = f(p)$	ts_p_CO2	TSPCO2(P)	C_TSPCO2(TS,P)	Saturation temperature from pressure	°C
$v = f(p, t, x)$	v_ptx_CO2	VPTXCO2(P,T,X)	C_VPTXCO2(V,P,T,X)	Specific volume	m³/kg
$w = f(p, t, x)$	w_ptx_CO2	WPTXCO2(P,T,X)	C_WPTXCO2(W,P,T,X)	Isentropic speed of sound	m/s
$x = f(p, h)$	x_ph_CO2	XPHCO2(P,H)	C_XPHCO2(X,P,H)	Backward function: Phase fraction from pressure and enthalpy	kg/kg
$x = f(p, s)$	x_ps_CO2	XPSCO2(P,S)	C_XPSCO2(X,P,S)	Backward function: Phase fraction from pressure and entropy	kg/kg

### Property Functions for Solid Carbon Dioxide (Dry Ice)

Functional Dependence	Function Name	Call from Fortran program	Call from the DLL LibCO2 as Parameter	Property or Function	Unit of the Result
$a = f(p, t)$	alICE_pt_CO2	APICETCO2(P,T)	C_APICEPTCO2 (A, P, T)	Thermal diffusivity	m²/s
$c_p = f(p, t)$	cpICE_pt_CO2	CPICETCO2(P,T)	C_CPICEPTCO2 (CP, P, T)	Specific isobaric heat capacity	kJ/(kg K)
$h = f(p, t)$	hICE_pt_CO2	HICETCO2(P,T)	C_HICEPTCO2 (H, P, T)	Specific enthalpy	kJ/ kg
$\lambda = f(t)$	lambdaICE_t_CO2	LAMICETCO2(P,T)	C_LAMICETCO2 (LAM, T)	Thermal conductivity	W/(m K)
$\rho = f(p, t)$	rhoICE_pt_CO2	RHOICETCO2(P,T)	C_RHOICEPTCO2 (RHO, P, T)	Density	kg/ m³
$s = f(p, t)$	sICE_pt_CO2	SICETCO2(P,T)	C_SICEPTCO2 (S, P, T)	Specific entropy	kJ/ (kg K)



Functional Dependence	Function Name	Call from Fortran program	Call from the DLL LibCO2 as Parameter	Property or Function	Unit of the Result
$v = f(p, t)$	vICE_pt_CO2	VICETCO2(P,T)	C_VICEPTCO2 (V, P, T)	Specific volume	m <sup>3</sup> /kg
$t = f(p, h)$	tlCE_ph_CO2	TICEHCO2(P,H)	C_TICEPHCO2 (T, P, H)	Backward function: Temperature from pressure and enthalpy	°C
$t = f(p, s)$	tlCE_ps_CO2	TICESCO2(P,S)	C_TICEPSCO2 (T, P, S)	Backward function: Temperature from pressure and entropy	°C

### Details on the Phase Fraction $x$

If the state point to be calculated is located in the single phase region (solid, liquid or superheated vapor),  $x = -1$  must be entered as a pro-forma value. Here the backward functions will also result in  $x = -1$ .

The two phase regions wet vapor region, melting region and sublimation region (cp. the following lg  $p, h$ -diagram) are calculated automatically by the subprograms. Please consider the following facts:

#### 1. Wet Vapor Region ( $0 \leq x \leq 1$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet vapor region in (kg dry saturated vapor)/(kg wet vapor).

In this case it is adequate to enter either the given value for  $t$  and  $p = -1000$ , or the given value for  $p$  and  $t = -1000$ , plus the value for  $x$  between 0 and 1. If values for both  $p$  and  $t$  are entered when calculating wet vapor, the program will consider  $p$  and  $t$  to be appropriate to represent the vapour pressure curve. If it is not the case the calculation for the quantity of the chosen function to be calculated results in  $-1000$ .

When calculating wet vapor,  $x$  results in a value between 0 and 1 ( $x = 0$  for boiling liquid,  $x = 1$  for dry saturated vapor). In this case, the backward functions result in the appropriate value between 0 and 1 for  $x$ .

Wet vapor region: Temperature range from  $T_t = 216.592$  K ( $t_t = -56.558$  °C) to  $T_c = 304.1282$  K ( $t_t = 30.9782$  °C)

Pressure ranges from  $p_t = 5.179618369088$  bar to  $p_c = 73.773$  bar

#### 2. Melting Region ( $10 \leq x \leq 11$ ):

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

In this case it is adequate to enter either the given value for  $t$  and  $p = -1000$ , or the given value for  $p$  and  $t = -1000$ , plus the value for  $x$  between 10 and 11. If values for both  $p$  and  $t$  are entered, the program will consider  $p$  and  $t$  to be appropriate to represent the melting pressure curve. If it is not the case the calculation for the quantity of the chosen function to be calculated results in  $-1000$ .

When calculating a melt,  $x$  results in a value between 10 and 11 ( $x = 10$  for melting solid,  $x = 11$  for solidifying liquid). In this case, the backward functions result in the appropriate value between 10 and 11 for  $x$ .

Melting region: Temperature range from  $T_{\max\_Ice} = 236.0309 \text{ K}$  ( $t_{\max\_Ice} = -37.119 \text{ °C}$ ) to  $T_t = 216.592 \text{ K}$  ( $t_t = -56.558 \text{ °C}$ )  
 Pressure range from  $p_t = 5.179618369088 \text{ bar}$  to  $p_{\max\_Ice} = 1000 \text{ bar}$

Only the limiting curve on the right hand side, thus solidifying liquid ( $x = 11$ ) is calculated for pressures  $p$  for which applies  $p_{\max\_Ice} < p \leq p_{\max}$ .

### 3. Sublimation Region ( $100 \leq x \leq 101$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating vapor)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating vapor.


In this case it is adequate to enter either the given value for  $t$  and  $p = -1000$ , or the given value for  $p$  and  $t = -1000$ , plus the value for  $x$  between 100 and 101. If values for both  $p$  and  $t$  are entered, the program will consider  $p$  and  $t$  to be appropriate to represent the sublimation pressure curve. If it is not the case the calculation for the quantity of the chosen function to be calculated results in  $-1000$ .

When calculating sublimation powder,  $x$  takes a value between 100 and 101 ( $x = 100$  for sublimating solid,  $x = 101$  for desublimating vapor). In this case, the backward functions result in the appropriate value between 100 and 101 for  $x$ .

Sublimation region: Temperature range from  $T_{\min} = 85 \text{ K}$  ( $t_{\min} = -188.15 \text{ °C}$ ) to  $T_t = 216.592 \text{ K}$  ( $t_t = -56.558 \text{ °C}$ )  
 Pressure range from  $p_{\min} = 2.9081875815 \cdot 10^{-10} \text{ bar}$  to  $p_t = 5.179618369088 \text{ bar}$

#### Note:

If the input values are located outside the range of validity, the calculated function will always result in  $-1000$ . Please find more exact details on every function and its corresponding range of validity in the enclosed software documentation in Chapter 3. The same information may also be accessed via the online help pages.

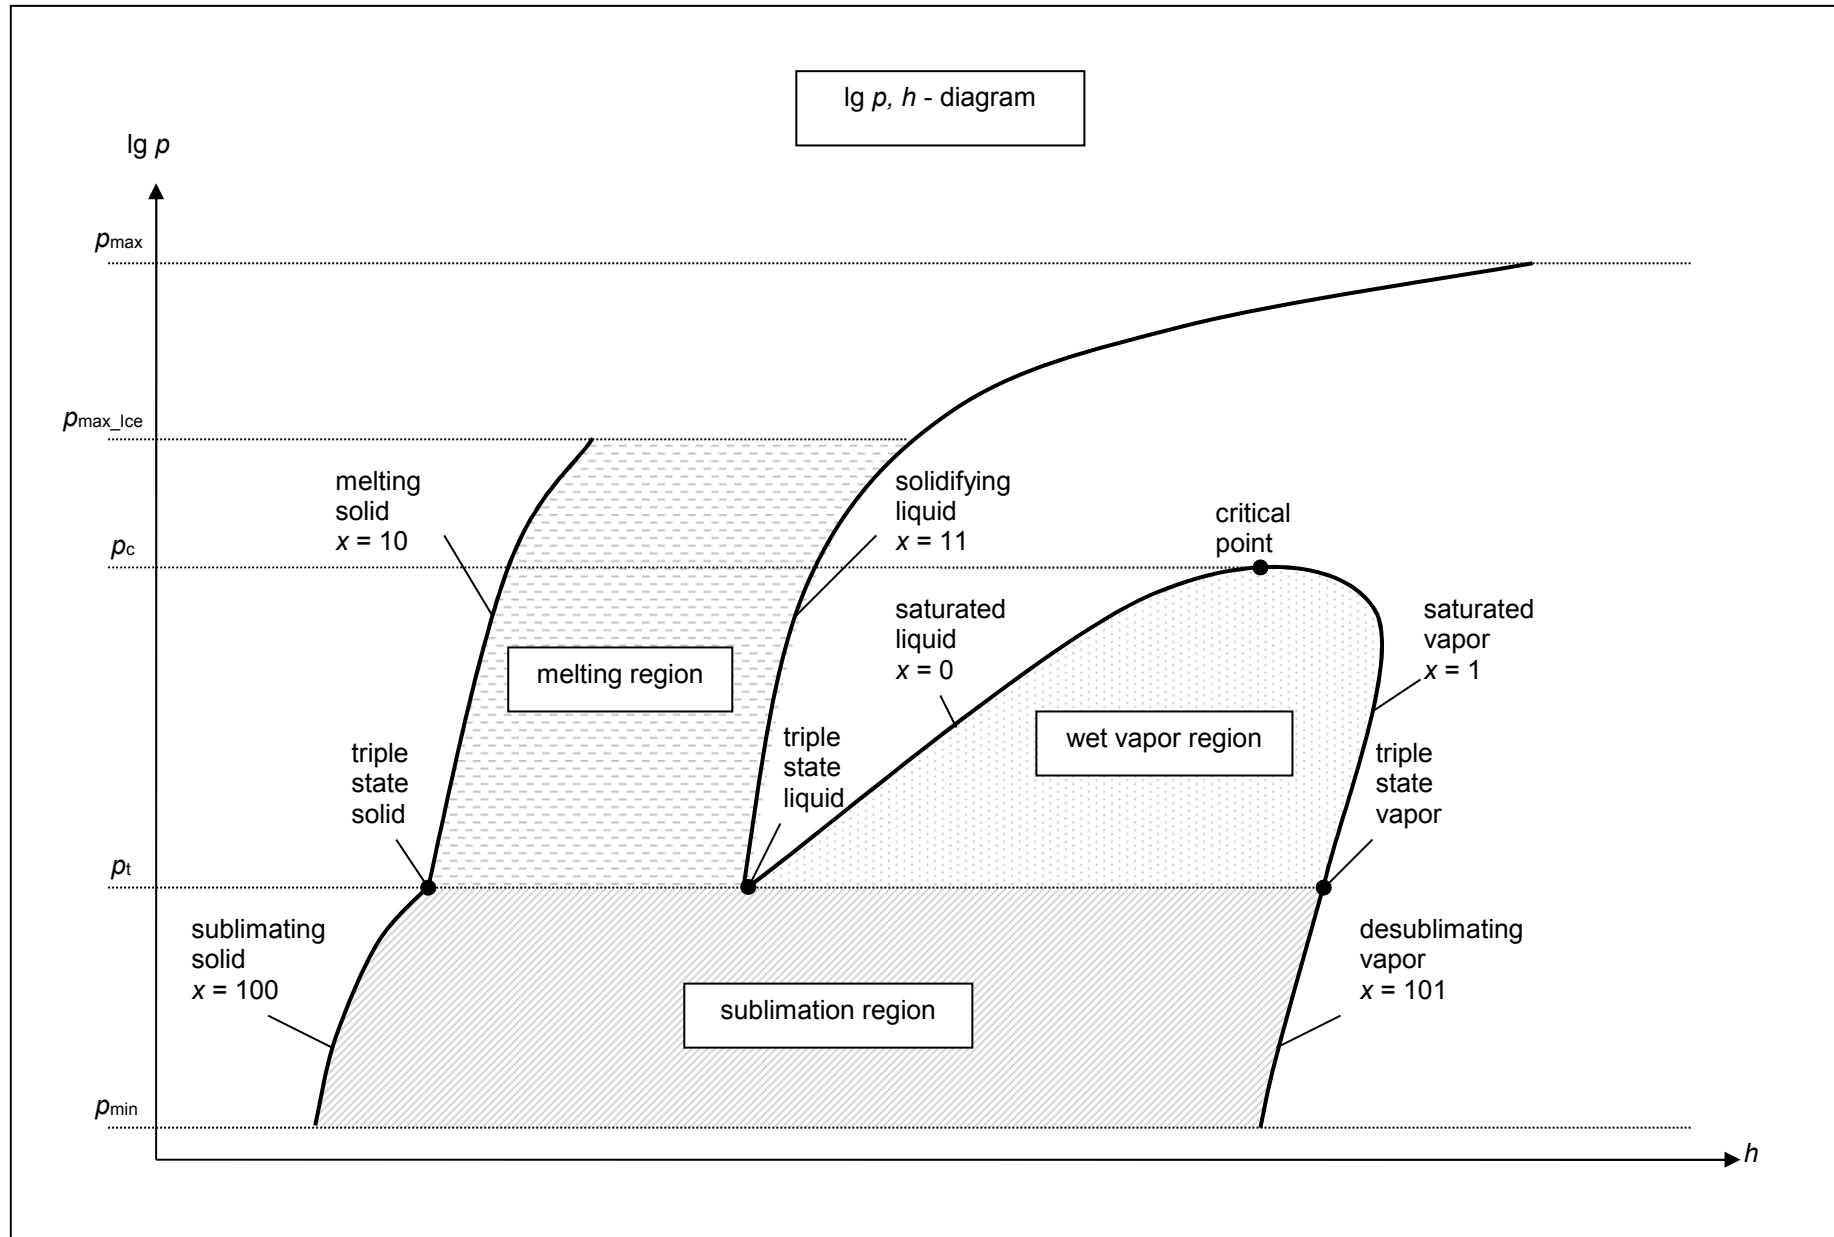

## 2 Application of FluidVIEW in LabVIEW™

The FluidVIEW Add-on has been developed to calculate thermodynamic properties in LabVIEW™ (version 10.0 or higher) more conveniently. Within LabVIEW™, it enables the direct call of functions relating to carbon dioxide from the LibCO2 property library.

### 2.1 Installing FluidVIEW

If a FluidVIEW property library has not yet been installed, please complete the initial installation procedure described below.

If a FluidVIEW property library has already been installed, you only need to copy several files which belong to the LibCO2 library. In this case, follow the subsection "Adding the LibCO2 Library" on page 2/3.

In both cases folders and files from the zip archive

CD\_FluidVIEW\_LibCO2.zip (for 32-bit version of LabVIEW™)

CD\_FluidVIEW\_LibCO2\_x64.zip (for 64-bit version of LabVIEW™)

have to be copied into the default directory of the LabVIEW™ development environment. In the following text these zipped directories for the 32-bit or 64-bit LabVIEW™ version will be symbolised with the term **<CD>**.

You can see the current default directory of LabVIEW™ in the paths page (options dialog box). To display this page please select *Tools* and click on *Options* to open the options dialog box and then select *Paths* from the category list.

By choosing *Default Directory* from the drop-down list the absolute pathname to the default directory, where LabVIEW™ automatically stores information, is displayed. In the following sections the pathname of the default directory will be symbolised by the term **<LV>**.

### Additional Requirement When Using a 64-bit Operating System


If you want to use FluidVIEW on a 64-bit computer that does not have Visual C++ installed, please make sure the Microsoft Visual C++ 2010 x64 Redistributable Package is installed.

If it is not the case, please install it by double clicking the file

vcredist\_x64.exe

which you find in the folder **\vcredist\_x64** in the **64-bit** CD folder "CD\_FluidVIEW\_LibCO2\_x64."

In the following window you are required to accept the Microsoft® license terms to install the Microsoft Visual C++ 2010 runtime libraries by ticking the box next to "I have read and accept the license terms" (see Figure 2.1).

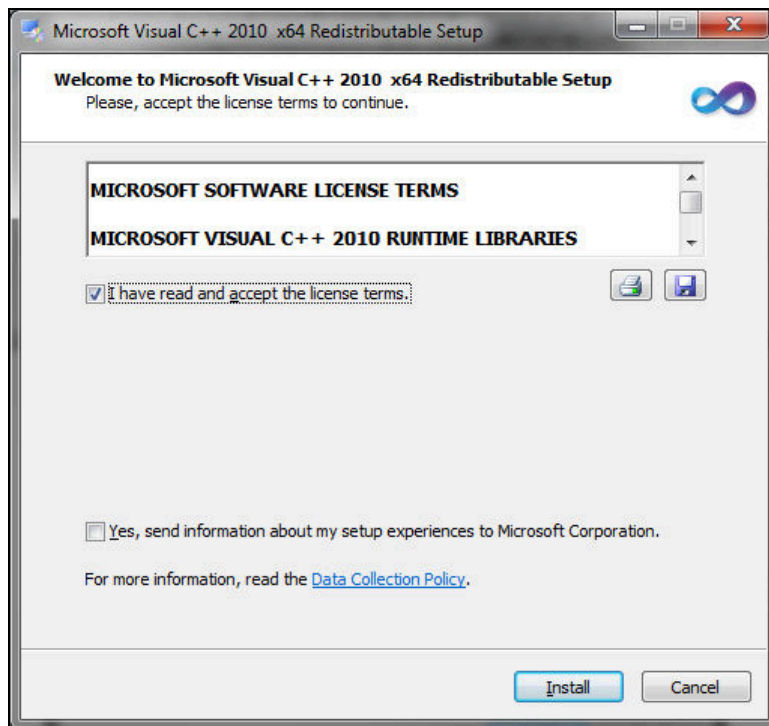

**Figure 2.1** Accepting the license terms to install the Microsoft Visual C++ 2010 x64 Redistributable Package

Now click on "Install" to continue installation.

After the "Microsoft Visual C++ 2010 x64 Redistributable Pack" has been installed, you will see the sentence "Microsoft Visual C++ 2010 x64 Redistributable has been installed." Confirm this by clicking "Finish."

Now you can use the FluidVIEW Add-On on your 64-bit LabVIEW™. Please follow the instructions below to install FluidVIEW.

### Initial Installation of FluidVIEW

The initial installation of FluidVIEW is carried out by copying three directories with its contents from the zip archive to the standard directory of LabVIEW™.

The directories that have to be copied, their paths in the zip archive and their target paths are listed in Table 2.1.

The installation is complete after copying the files and restarting LabVIEW™.

Due to the fact, that the functions of the DLL are called with a variable pathname, the source files you will find in the directory **<CD>\source** can be stored in a random directory on the hard disk. The pathname of LibCO2.dll, which is located in this directory, has to be indicated in order to calculate the property functions (see example calculation in section 2.4 on page 2/9).

All source files have to be stored in the same directory to make the property functions of the LibCO2 library work. These files are for the

- **32-bit system:** LibCO2.dll, advapi32.dll, Dformd.dll, Dforrt.dll, LC.dll, msvcp60.dll, and msvcr7.dll

and for the

- **64-bit system:** LibCO2.dll, capt\_ico\_big.ico, LC.dll, libifcoremd.dll, libiomp5md.dll, and libmmd.dll.

**Table 2.1** Directories which have to be copied from the zip archive in the default directory of LabVIEW™ (<LV>) for the initial installation of FluidVIEW

Name of the directory	Parent directory in the zip archive	Target path in the default directory of LabVIEW (<LV>)
FluidVIEW	<CD>\vi.lib	<LV>\vi.lib
FluidVIEW	<CD>\menus\Categories	<LV>\menus\Categories
FluidVIEW-Help	<CD>\help	<LV>\help

### Adding the LibCO2 Library

In order to add the LibCO2 property library to an existing FluidVIEW installation, one folder with its contents and five files have to be copied from the zip archive to the standard directory of LabVIEW™. This directory, the files plus their pathnames in the zip archive and their target paths are listed in Table 2.2.

The installation is complete after copying the files and restarting LabVIEW™.

Due to the fact, that the functions of the DLL are called with a variable pathname, the source files you will find in the directory <CD>\source can be stored in a random directory on the harddisc. The pathname of LibCO2.dll, which is located in this directory, has to be indicated in order to calculate the property functions (see example calculation in section 2.4 on page 2/9).

All source files have to be stored in the same directory to make the property functions of the LibCO2 library work. These files are for the

- **32-bit system:** LibCO2.dll, advapi32.dll, Dformd.dll, Dfortt.dll, LC.dll, msvcpr60.dll, and msvcr7.dll

and for the

- **64-bit system:** LibCO2.dll, capt\_ico\_big.ico, LC.dll, libifcoremd.dll, libiomp5md.dll, and libmmd.dll

**Table 2.2** Data which have to be copied from the zip archive in the default directory of LabVIEW™ (<LV>) for adding the LibCO2 property library to an existing installation of FluidVIEW

File name with file extension or name of the directory	Parent directory in the zip archive	Target path in the default directory of LabVIEW (<LV>)
LibCO2.lib	<CD>\vi.lib\FuildVIEW	<LV>\vi.lib\FuildVIEW
LibCO2	<CD>\menus\Categories \FuildVIEW	<LV>\menus\Categories \FuildVIEW
LibCO2.hlp	<CD>\help\FuildVIEW-Help	<LV>\help\FuildVIEW-Help
LibCO2.txt	<CD>\help\FuildVIEW-Help	<LV>\help\FuildVIEW-Help
FluidVIEW_LibCO2.pdf	<CD>\help\FuildVIEW-Help	<LV>\help\FuildVIEW-Help
Open_LibCO2_doc.vi	<CD>\help\FuildVIEW-Help	<LV>\help\FuildVIEW-Help
Open_LibCO2_doc.txt	<CD>\help\FuildVIEW-Help	<LV>\help\FuildVIEW-Help

After you have restarted LabVIEW™ you will find the functions of the LibCO2 property library in the functions palette under the sub palette FluidVIEW. An example calculation of the specific enthalpy  $h$  is shown in section 2.4.

## 2.2 The FluidVIEW Help System


FluidVIEW provides detailed online help functions.

### General Information

The FluidVIEW Help System consists of the Microsoft WinHelp file **LibCO2.chm** and this user's guide as PDF document **FluidVIEW\_LibCO2\_Docu\_Eng.pdf**. Both files can be opened via the help menu. To do this please click *Help* in the menu bar. In the submenu *FluidVIEW-Help* you will find the commands *LibCO2 Help File* and *LibCO2 User's Guide* to open an appropriate file.

### Context-Sensitive Help


If you have activated the context help function in LabVIEW™ (Ctrl-H) and move the cursor over a FluidVIEW object basic information is displayed in the context help window. The in- and output parameters plus a short information text are displayed for a property function. By clicking the **Detailed help** button in the **Context help** window the online help will be opened. The context help window of the function `h_ptx_CO2.vi` is shown in Figure 2.2.

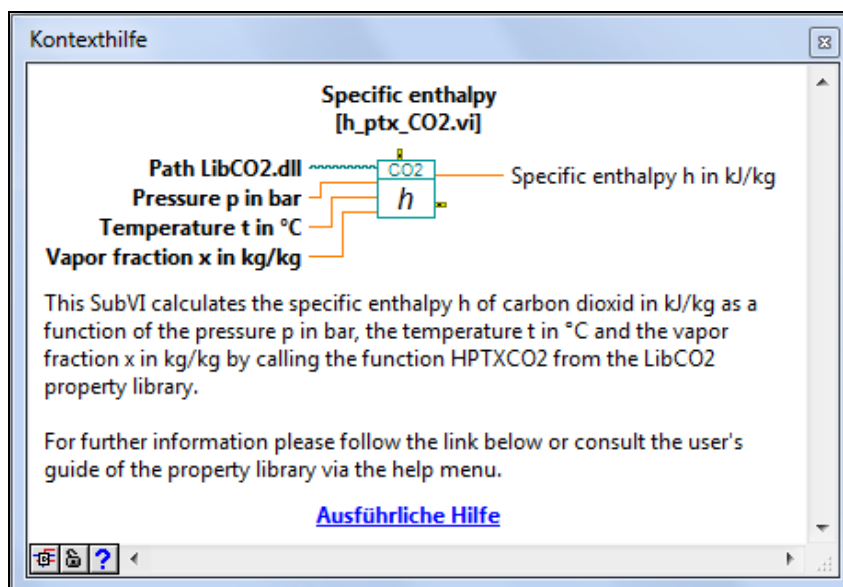

**Figure 2.2** Context help window of the function `h_ptx_CO2.vi`


## 2.3 Licensing the LibCO2 Property Library

The licensing procedure has to be carried out when calculating a LibCO2 function and a FluidVIEW prompt message appears. In this case, you will see the "License Information" window (see figure below).

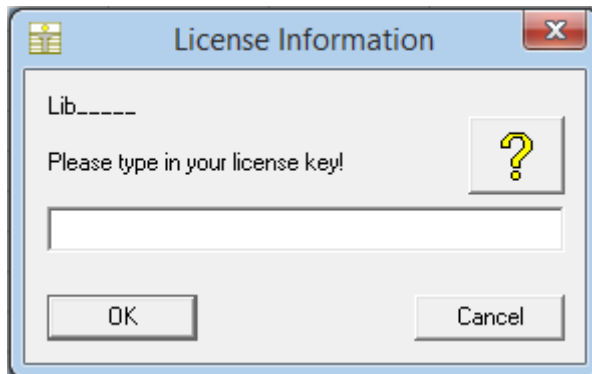

**Figure 2.3** "License Information" window

Here you will have to type in the license key. You can find contact information on the "Content" page of this User's Guide or by clicking the yellow question mark in the "License Information" window. Then the following window will appear:

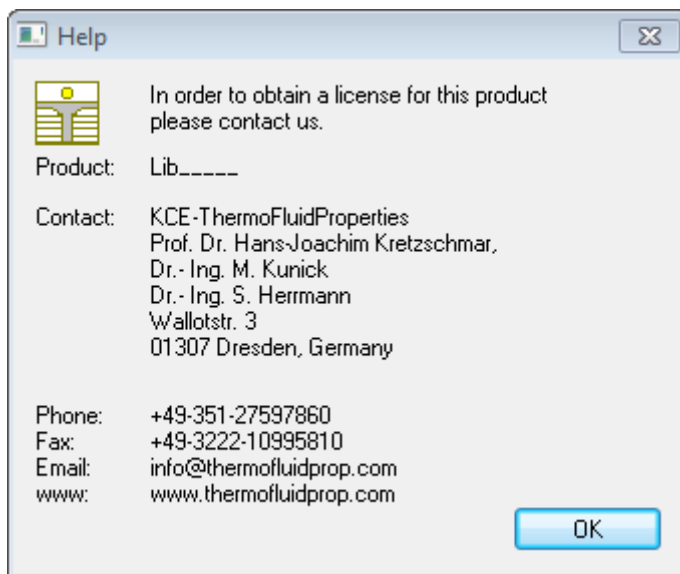

**Figure 2.4** "Help" window

If you do not enter a valid license it is still possible to run your VI by clicking "Cancel". In this case, the LibCO2 property library will display the result "-1.11111E+7" for every calculation.

The "License Information" window will appear every time you reopen your Virtual Instrument (VI) or reload the path of the LibCO2.dll. Should you not wish to license the LibCO2 property library, you have to uninstall FluidVIEW according to the description in section 2.5 of this User's Guide.

### **Note:**

*The product name "Lib\_-----" in the Figures above stands for the Library you are installing.*




## 2.4 Example: Calculation of $h = f(p, t, x)$

After the delivered files have been copied in the appropriate folders of the default directory LabVIEW™ (described in section 2.1), the LibCO2 property library is ready to use. The function nodes of the LibCO2 property library can be used by dragging them from the functions palette into the block diagram and connecting them with the wires representing the required input parameters.


Now we will calculate, step by step, the specific enthalpy  $h$  as a function of pressure  $p$ , temperature  $t$ , and vapor fraction  $x$ , using FluidVIEW.

- Start LabVIEW™ and wait for the *Getting Started* window to be displayed. Then select *Blank VI*. The *Blank VI* will be displayed in two windows, the front panel and the block diagram.
- Open the functions palette in the block diagram **via view / Functions Palette** (or by clicking the right mouse button anywhere in the free area of the block diagram) if not yet displayed.
- In addition to the default LabVIEW™ palettes the functions palette contains the sub palette *FluidVIEW* (see Figure 2.5) with the sub palette *LibCO2* (see Figure 2.6).

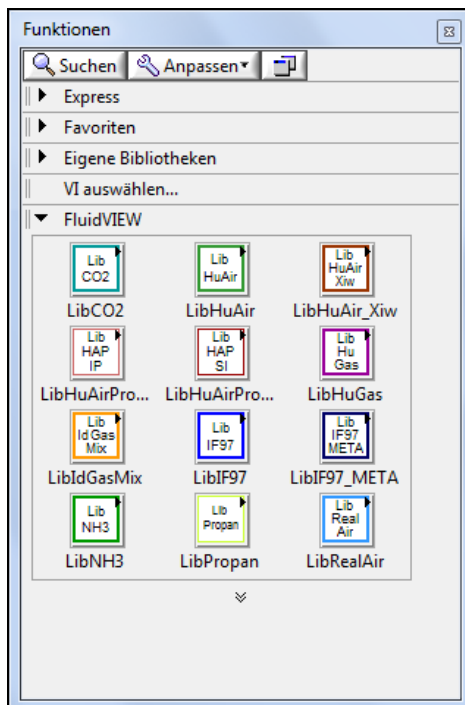

**Figure 2.5**

Functions palette with the sub palettes FluidVIEW and LibCO2

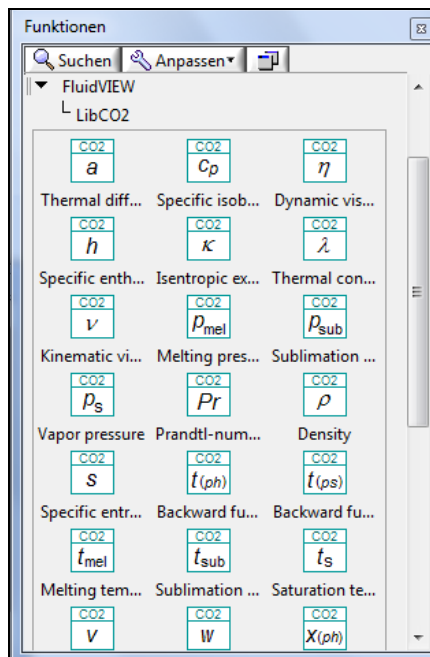

**Figure 2.6**

Functions palette with the property functions of the LibCO2 library


In order to calculate the specific enthalpy  $h$ , drag the function (SubVI) whose symbol shows the  $h$  from the functions palette into the block diagram.

While the short names of the SubVIs behind the symbols will be shown in the control tip, the full names and brief descriptions of the property functions are displayed in the *Context Help* window (see Figure 2.2). To use the context help press <Ctrl>+<H> on your keyboard.


- After placing the node of the SubVI **h\_ptx\_CO2.vi** on your block diagram the required input parameters have to be defined.

The input parameters which are set as required appear in bold type in the Context Help window. In this case these input parameters are **Path LibCO2.dll** (LabVIEW™ data type: Path), **Pressure  $p$  in bar** (LabVIEW™ data type: Double precision, floating-point), **Temperature  $t$  in °C** (LabVIEW™ data type: Double precision, floating-point) and **Vapor fraction  $x$  in kg/kg** (LabVIEW™ data type: Double precision, floating-point).

- To define these variables wire their input terminals with input elements on the front panel. You can accomplish this in one step by choosing **Create / Control** in the context menu of all required input terminals. In order to wire the output terminal of the function node with an output element on the front panel, choose **Create / Indicator** in the context menu of the output terminal **Specific enthalpy  $h$  in kJ/kg** (LabVIEW™ data type: Double precision, floating-point). After cleaning up the block diagram by pressing <Ctrl>+<U> it has the appearance illustrated in Figure 2.7. The same input and output elements are available on the appropriate front panel (see Figure 2.8).

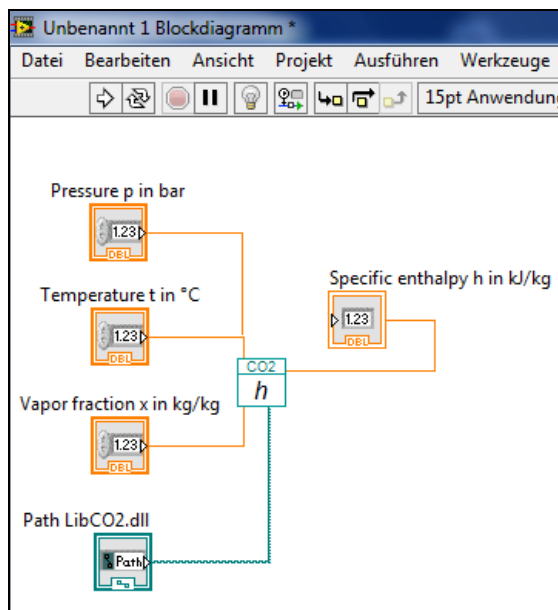

**Figure 2.7**  
Block diagram of the example calculation

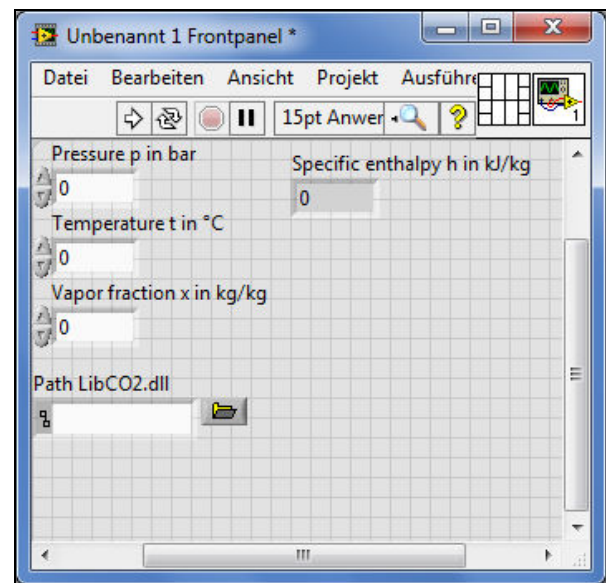

**Figure 2.8**  
Front panel of the example calculation

- Enter a value in the input element *pressure  $p$  in bar* on the front panel  
(Range of validity:  $p = 0.001 \text{ bar} \dots 1000 \text{ bar}$ )  
⇒ e. g.: Enter the value 10 for  $p$ .
- Enter a value in the input element *temperature  $t$  in °C* on the front panel  
(Range of validity:  $t = t_{\text{mel}} \dots 1226.85 \text{ °C}$ )  
⇒ e. g.: Enter the value 25 for  $t$ .

Enter a value in the input element *vapor fraction  $x$  in kg saturated steam/kg wet steam* on the front panel.

Since the wet steam region is calculated automatically by the subprograms, the following fixed details on the vapor fraction  $x$  are to be considered:

If the state point to be calculated is located in the single-phase region (liquid or superheated steam), e. g., pressure  $p$  and temperature  $t$  are given, the value  $-1$  must be entered into the  $x$  cell as a pro-forma value.

In case, the state point to be calculated is located in the wet steam region, values between 0 and 1 have to be entered for  $x$  (the value 0 for boiling liquid, the value 1 for saturated steam).

Here, it is adequate to enter either the value given for  $t$  and  $p = -1$ , or the given value for  $p$  and  $t = -1$ , plus the value for  $x$  between 0 and 1.

However, if  $p$  and  $t$  and  $x$  are given when calculating wet steam, the program initially checks whether  $p$  and  $t$  meet the saturation-pressure curve. If this is not the case the enthalpy calculated later will result in -1000.

Vapor pressure curve of carbon dioxide:


$$t_t = -270.9732 \text{ °C} \dots t_c = 267.9485 \text{ °C}$$

$$p_t = 0.048564759143234 \text{ bar} \dots p_c = 2.27475064473337 \text{ bar}$$

⇒ e. g.: Enter the value -1 for  $x$ .

- Enter the path of the LibCO2.dll in the input element *Path LibCO2.dll* on the front panel (as explained in section 2.1 the LibCO2.dll and the other library files from the directory <CD>\source have to be stored in the same directory which is arbitrary). To do this you can use the *File Open Dialog* which appears by clicking the yellow folder symbol on the right of the input element.
- To run the calculation of the specific enthalpy click on the *Run* button or press <Ctrl>+<R>. The result for  $h$  in kJ/kg appears in the output element (see Figure 2.9).

⇒ The result for  $h$  in our sample calculation is  $h = -9.64567 \text{ kJ/kg}$ .

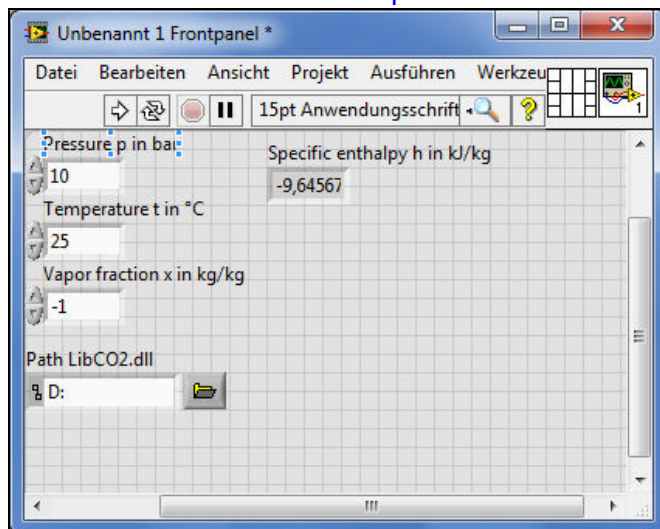

**Figure 2.9** Result of the example calculation of  $h$

The calculation of  $h = f(p, t, x)$  has thus been completed. You can now arbitrarily change the values for  $p$ ,  $t$ , or  $x$  in the appropriate input elements.

**Note:**

If the calculation results in -1000, this indicates that the values entered are located outside the range of validity. More detailed information on each function and its range of validity is available in chapter 3. For further property functions calculable with FluidVIEW, see the function table in chapter 1.

## 2.5 Removing FluidVIEW

Should you wish to remove the LibCO2 library or the complete FluidVIEW Add-on you have to delete the files that have been copied in the default directory of the LabVIEW™ development environment <LV>.

### Removing the FluidVIEW Add-on

To remove the FluidVIEW Add-on please delete the folders listed in Table 2.3 from the default directory of LabVIEW™.

**Table 2.3** Directories that have to be deleted from the default directory of LabVIEW™ to remove the FluidVIEW Add-on

Name of the directory	Parent directory in the default directory of LabVIEW™ (<LV>)
FluidVIEW	<LV>\vi.lib
FluidVIEW	<LV>\menus\Categories
FluidVIEW-Help	<LV>\help

### Removing only the LibCO2 library

To remove only the LibCO2 library please delete the folders or files listed in Table 2.4 from the default directory of LabVIEW™.


**Table 2.4** Data that have to be deleted from the default directory of LabVIEW™ (<LV>) to remove only the LibCO2 library.

File name with file extension or name of the directory	Parent directory in the default directory of LabVIEW (<LV>)
LibCO2.lib	<LV>\vi.lib\FuildVIEW
LibCO2	<LV>\menus\Categories\FuildVIEW
LibCO2.hlp	<LV>\help\FuildVIEW-Help
LibCO2.txt	<LV>\help\FuildVIEW-Help
FluidVIEW_LibCO2.pdf	<LV>\help\FuildVIEW-Help
Open_LibCO2_doc.vi	<LV>\help\FuildVIEW-Help
Open_LibCO2_doc.txt	<LV>\help\FuildVIEW-Help

The changes will take effect after restarting LabVIEW™.

### 3. Program Documentation


#### 3.1 Ranges of Validity

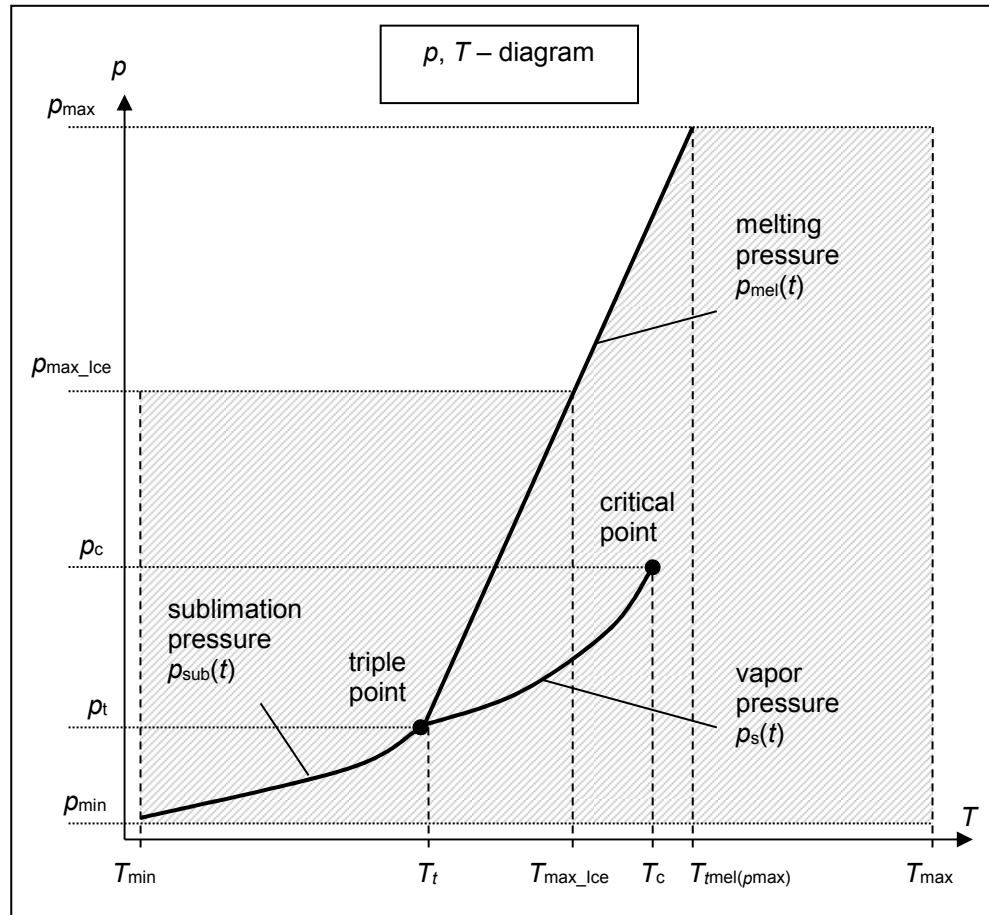

#### Reference State:

At  $p = 1.01325 \text{ bar}$  and  $T = 298.15 \text{ K}$  ( $25 \text{ }^{\circ}\text{C}$ ) :  
 $h = -0.938457860 \text{ kJ/kg}$  and  $s = -0.00219606205 \text{ kJ/(kg K)}$

Factor	Abbreviation	Value and Unit
Minimum temperature	$T_{\text{min}} (t_{\text{min}})$	85 K ( $-188.15 \text{ }^{\circ}\text{C}$ )
Maximum temperature	$T_{\text{max}} (t_{\text{max}})$	1500 K ( $1226.85 \text{ }^{\circ}\text{C}$ )
Triple temperature	$T_{\text{t}} (t_{\text{t}})$	216.592 K ( $-56.558 \text{ }^{\circ}\text{C}$ )
Temperature at the critical point	$T_{\text{c}} (t_{\text{c}})$	304.1282 K ( $30.9782 \text{ }^{\circ}\text{C}$ )
Maximum temperature of solid region	$T_{\text{max\_Ice}} (t_{\text{max\_Ice}})$	236.0309 K ( $-37.119 \text{ }^{\circ}\text{C}$ )
Maximum temperature of melting pressure curve	$T_{\text{mel}}(p_{\text{max}}) (t_{\text{mel}}(p_{\text{max}}))$	327.671 K ( $54.521 \text{ }^{\circ}\text{C}$ )
Minimum pressure	$p_{\text{min}} = p_{\text{sub}}(T_{\text{min}})$	$2.9081875815 \cdot 10^{-10} \text{ bar}$
Maximum pressure	$p_{\text{max}}$	8000 bar
Triple pressure	$p_{\text{t}}$	5.179618369088 bar
Pressure at the critical point	$p_{\text{c}}$	73.773 bar
Maximum pressure of solid region	$p_{\text{max\_Ice}}$	1000 bar

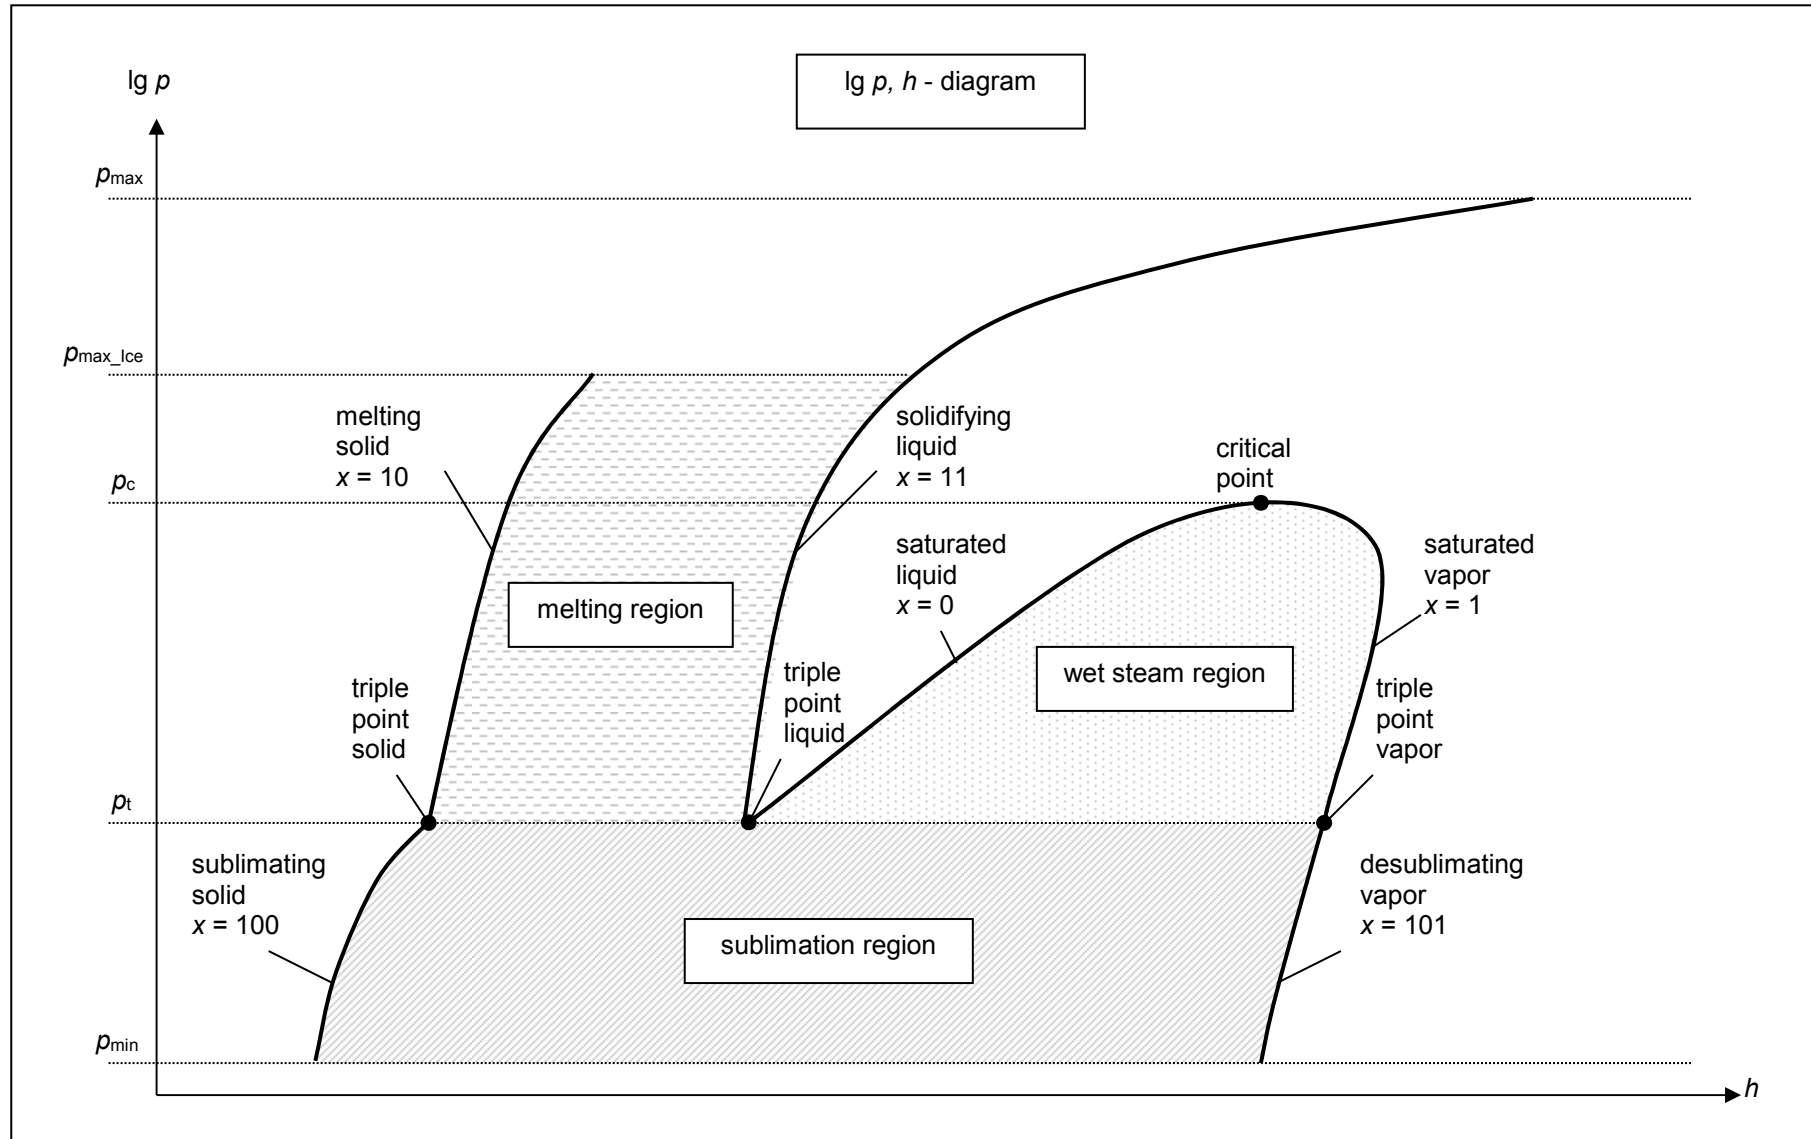

## 3.2 General Property Functions

### Thermal Diffusivity $a = f(p, t, x)$

Function Name: **a\_ptx\_CO2**  
 Subprogram with value of the function: **REAL\*8 FUNCTION APTXCO2(P,T,X)**  
 for call from Fortran **REAL\*8 P,T,X**  
 Subprogram with parameter: **INTEGER\*4 FUNCTION C\_APTXCO2(A,P,T,X)**  
 for call from the DLL **REAL\*8 A,P,T,X**

#### Input Values

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

#### Result

**APTXCO2, A or a\_ptx\_CO2** – Thermal diffusivity  $a = \frac{\lambda \cdot v}{c_p}$  in m<sup>2</sup>/s

#### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\min}$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
 from  $p_{\min}$  to  $p_{\max\_ice}$  for solid

#### Details on the phase fraction $x$

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

##### 1. Wet Vapor Region ( $0 \leq x \leq 1$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

The calculation for  $x$  values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$   
 Pressure range from  $p_t$  to  $p_c$

##### 2. Melting Region ( $10 \leq x \leq 11$ ):

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

The calculation for  $x$  values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for  $x$ . In case of solidifying liquid (solidification curve)  $x = 11$  has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 10$  or  $x = 11$ ). If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_ice}$

Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$

Pressure range from  $p_t$  to  $p_{\max}$

Only the solidification curve ( $x = 11$ ) is calculated for pressures  $p$  for which applies  $p_{\max\_Ice} < p \leq p_{\max}$ .

### 3. Sublimation Region ( $100 \leq x \leq 101$ ):

The phase fraction  $x$  equates to the vapour fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

The calculation for  $x$  values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for  $x$ . In case of desublimating steam  $x = 101$  has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 100$  or  $x = 101$ ). If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$

Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **APTXXCO2 = -1000, A = -1000** or **a\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Solid, liquid, overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at Feststoff
- at  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at Feststoff

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $0 < x < 1$ , i.e. calculation in the wet steam region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $10 < x < 11$ , i.e. calculation in the melting region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $100 < x < 101$ , i.e. calculation in the sublimation region not possible!
- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2], [3]



## Specific Isobaric Heat Capacity $c_p = f(p, t, x)$

Function Name: **cp\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION CPPTXCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_CPPTXCO2(CP,P,T,X)**  
for call from the DLL **REAL\*8 CP,P,T,X**

### Input Values

**P** – Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

### Result

**CPPTXCO2, CP** or **cp\_ptx\_CO2** - specific isobaric heat capacity  $c_p$  in kJ/(kg K)

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\min}$  to  $t_{\max}$

Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
from  $p_{\min}$  to  $p_{\max\_Ice}$  for solid

### Details on the phase fraction $x$

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

#### 1. Wet Vapor Region ( $0 \leq x \leq 1$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

The calculation for  $x$  values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$   
Pressure range from  $p_t$  to  $p_c$

#### 2. Melting Region ( $10 \leq x \leq 11$ ):

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

The calculation for  $x$  values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for  $x$ . In case of solidifying liquid (solidification curve)  $x = 11$  has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 10$  or  $x = 11$ ). If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$   
Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$   
Pressure range from  $p_t$  to  $p_{\max}$

Only the solidification curve ( $x = 11$ ) is calculated for pressures  $p$  for which applies  $p_{\max\_Ice} < p \leq p_{\max}$ .

### 3. Sublimation Region ( $100 \leq x \leq 101$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

The calculation for  $x$  values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for  $x$ . In case of desublimating steam  $x = 101$  has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 100$  or  $x = 101$ ). If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$

Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **CPPTXCO2 = -1000, CP = -1000** or **cp\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Solid, liquid, overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid
- at  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $0 < x < 1$ , i.e. calculation in the wet steam region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $10 < x < 11$ , i.e. calculation in the melting region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $100 < x < 101$ , i.e. calculation in the sublimation region not possible!
- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2]

## Dynamic Viscosity $\eta = f(p, t, x)$

Function Name: **eta\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION ETAPTCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_ETAPTCO2(ETA,P,T,X)**  
for call from the DLL **REAL\*8 ETA,P,T,X**

### Input Values

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

### Result

**ETAPTXCO2, ETA or eta\_ptx\_CO2** – dynamic viscosity  $\eta$  in Pa s

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_t$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam

### Details on the phase fraction $x$

If the state point to be calculated is located in the single phase region (liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value. Calculating solid is not possible.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

#### 1. Wet Vapor Region ( $0 \leq x \leq 1$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

The calculation for  $x$  values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$

Pressure range from  $p_t$  to  $p_c$

#### 2. Melting Region ( $10 \leq x \leq 11$ ):

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

The calculation for  $x$  values of  $x = 10$  (melting curve) and between 10 and 11 is not possible.

If solidifying liquid (solidification curve) is to be calculated, the value 11 has to be entered for  $x$ .

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 11 for  $x$  must be entered when calculating solidifying liquid.

If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$

Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$

Pressure range from  $p_t$  to  $p_{\max}$

### 3. Sublimation Region ( $100 \leq x \leq 101$ ) :

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

The calculation for  $x$  values of  $x = 100$  (sublimation curve) and between 100 and 101 is not possible. If desublimating steam (desublimation curve) is to be calculated, the value 101 has to be entered for  $x$ . Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 101 for  $x$  must be entered when calculating desublimating steam. If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and  
desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$   
Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **ETAPTXXCO2 = -1000**, **ETA = -1000** or **eta\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Liquid and overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$
- at  $t < t_{\min}$  or  $t > t_{\max}$

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $0 < x < 1$ , i.e. calculation in the wet steam region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $10 < x < 11$ , i.e. calculation on the melting curve and in the melting region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $100 \leq x < 101$ , i.e. calculation on the sublimation curve and in the sublimation region not possible!
- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2], [3]

## Specific Enthalpy $h = f(p, t, x)$

Function Name: **h\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION HPTXCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_HPTXCO2(H,P,T,X)**  
for call from the DLL **REAL\*8 H,P,T,X**

### Input Values

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

### Result

**HPTXCO2, H or h\_ptx\_CO2** - specific enthalpy  $h$  in kJ/kg

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\min}$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
                           from  $p_{\min}$  to  $p_{\max\_Ice}$  for solid

### Details on the phase fraction $x$

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

#### 1. Wet Vapor Region ( $0 \leq x \leq 1$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for  $x$ .

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve:      Temperature range from  $t_t$  to  $t_c$   
    Pressure range from  $p_t$  to  $p_c$

#### 2. Melting Region ( $10 \leq x \leq 11$ ):

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for  $x$ .

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for  $x$ . In case of solidifying liquid (solidification curve)  $x = 11$  has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 10$  or  $x = 11$ ). If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$

Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$

Pressure range from  $p_t$  to  $p_{\max}$

Only the solidification curve ( $x = 11$ ) is calculated for pressures  $p$  for which applies  $p_{\max\_Ice} < p \leq p_{\max}$ .

### 3. Sublimation Region ( $100 \leq x \leq 101$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for  $x$ .

If sublimating solid is to be calculated, the value 100 has to be entered for  $x$ . In case of desublimating steam  $x = 101$  has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 100$  or  $x = 101$ ). If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$

Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **HPTXCO2 = -1000, H = -1000** or **h\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Solid, liquid, overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid
- at  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2]

**Isentropic Exponent  $\kappa = f(p,t,x)$** 

Function Name: **kappa\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION KAPTXCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_KAPTXCO2(KAP,P,T,X)**  
for call from the DLL **REAL\*8 KAP,P,T,X**

**Input Values**

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

**Result**

**KAP\_PTX\_CO2, KAP or kappa\_ptx\_CO2** – Isentropic exponent  $\kappa = \frac{w^2}{p \cdot v}$

**Range of Validity** (cp.  $p,t$ -diagram in chapter 3.1)

Temperature range: from  $t_t$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam

**Details on the phase fraction  $x$** 

If the state point to be calculated is located in the single phase region (liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value. Calculating solid is not possible.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p,h$ -diagram chapter 3.1):

**1. Wet Vapor Region ( $0 \leq x \leq 1$ ):**

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

The calculation for  $x$  values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$   
 Pressure range from  $p_t$  to  $p_c$

**2. Melting Region ( $10 \leq x \leq 11$ ):**

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

The calculation for  $x$  values of  $x = 10$  (melting curve) and between 10 and 11 is not possible.

If solidifying liquid (solidification curve) is to be calculated, the value 11 has to be entered for  $x$ .

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 11 for  $x$  must be entered when calculating solidifying liquid.

If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$   
 Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$   
 Pressure range from  $p_t$  to  $p_{\max}$

### 3. Sublimation Region ( $100 \leq x \leq 101$ ) :

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

The calculation for  $x$  values of  $x = 100$  (sublimation curve) and between 100 and 101 is not possible. If desublimating steam (desublimation curve) is to be calculated, the value 101 has to be entered for  $x$ . Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 101 for  $x$  must be entered when calculating desublimating steam. If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and  
desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$   
Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **KAP\_PTX\_CO2**, **KAP = -1000** or **kappa\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Liquid and overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$
- at  $t < t_t$  or  $t > t_{\max}$

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $0 < x < 1$ , i.e. calculation in the wet steam region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $10 < x < 11$ , i.e. calculation on the melting curve and in the melting region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $100 \leq x < 101$ , i.e. calculation on the sublimation curve and in the sublimation region not possible!
- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2]



**Thermal Conductivity  $\lambda = f(p, t, x)$** 

Function Name: **lambda\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION LAMPTCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_LAMPTXCO2(LAM,P,T,X)**  
for call from the DLL **REAL\*8 LAM,P,T,X**

### Input Values

**P** – Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

### Result

**LAMPTXCO2, LAM** or **lambda\_ptx\_CO2** – Thermal conductivity  $\lambda$  in W/m K

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\min}$  to  $t_{\max}$

Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
from  $p_{\min}$  to  $p_{\max\_Ice}$  for solid

### Details on the phase fraction $x$

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

#### 1. Wet Vapor Region ( $0 \leq x \leq 1$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

The calculation for  $x$  values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$

Pressure range from  $p_t$  to  $p_c$

#### 2. Melting Region ( $10 \leq x \leq 11$ ):

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

The calculation for  $x$  values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for  $x$ . In case of solidifying liquid (solidification curve)  $x = 11$  has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 10$  or  $x = 11$ ). If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$

Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$

Pressure range from  $p_t$  to  $p_{\max}$

Only the solidification curve ( $x = 11$ ) is calculated for pressures  $p$  for which applies  $p_{\max\_Ice} < p \leq p_{\max}$ .

### 3. Sublimation Region ( $100 \leq x \leq 101$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

The calculation for  $x$  values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for  $x$ . In case of desublimating steam  $x = 101$  has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 100$  or  $x = 101$ ). If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$

Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **LAMPTXCO2 = - 1000**, **LAM = -1000** or **lambda\_ptx\_CO2 = - 1000** for input values:

#### Single phase region:

Solid, liquid, overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid
- at  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $0 < x < 1$ , i.e. calculation in the wet steam region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Melting region ( $10 \leq x \leq 11$ ):

- at  $10 < x < 11$ , i.e. calculation in the melting region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $100 < x < 101$ , i.e. calculation in the sublimation region not possible!
- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2], [3]

**Kinematic Viscosity  $\nu = f(p, t, x)$** 

Function Name: **ny\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION NYPTXCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_NYPTXCO2(NY,P,T,X)**  
for call from the DLL **REAL\*8 NY,P,T,X**

### Input Values

**P** – Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

### Result

**NYPTXCO2, NY or ny\_ptx\_CO2** – Kinematic viscosity  $\nu = \eta * \nu$  in m<sup>2</sup>/s

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_t$  to  $t_{\max}$

Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam

### Details on the phase fraction $x$

If the state point to be calculated is located in the single phase region (liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value. Calculating solid is not possible.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp.  $\lg p, h$ -diagram chapter 3.1):

#### 1. Wet Vapor Region ( $0 \leq x \leq 1$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

The calculation for  $x$  values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

**Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.**

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$

Pressure range from  $p_t$  to  $p_c$

#### 2. Melting Region ( $10 \leq x \leq 11$ ):

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

The calculation for  $x$  values of  $x = 10$  (melting curve) and between 10 and 11 is not possible.

If solidifying liquid (solidification curve) is to be calculated, the value 11 has to be entered for  $x$ .

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 11 for  $x$  must be entered when calculating solidifying liquid.

If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$

Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$

Pressure range from  $p_t$  to  $p_{\max}$

### 3. Sublimation Region ( $100 \leq x \leq 101$ ) :

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

The calculation for  $x$  values of  $x = 100$  (sublimation curve) and between 100 and 101 is not possible. If desublimating steam (desublimation curve) is to be calculated, the value 101 has to be entered for  $x$ . Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 101 for  $x$  must be entered when calculating desublimating steam. If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and  
desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$   
Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result NYPTXCO2 = -1000, NY = -1000 or ny\_ptx\_CO2 = -1000 for input values:

#### Single phase region:

Liquid and overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$
- at  $t < t_t$  or  $t > t_{\max}$

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $0 < x < 1$ , i.e. calculation in the wet steam region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $10 < x < 11$ , i.e. calculation on the melting curve and in the melting region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $100 \leq x < 101$ , i.e. calculation on the sublimation curve and in the sublimation region not possible!
- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2], [3]

**Melting Pressure  $p_{\text{mel}} = f(t)$** 

Function Name: **pmel\_t\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION PMELCO2(T)**  
 for call from Fortran **REAL\*8 T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_PMELCO2(PMEL,T)**  
 for call from the DLL **REAL\*8 PMEL,P,T,X**

**Input Values**

T - Temperature  $t$  in °C

**Result**

**PMELCO2, PMEL** or **pmel\_t\_CO2** – Melting pressure  $p_{\text{mel}}$  in bar

**Range of Validity** (cp.  $p,t$ -diagram in chapter 3.1)

Temperature range: from  $t_t$  to  $t_{\text{mel}}(p_{\text{max}})$

**Results for wrong input values**

Result **PMELCO2 = -1000**, **PMEL = -1000** or **pmel\_t\_CO2 = -1000** for input values:

- at  $t < t_t$  or  $t > t_{\text{mel}}(p_{\text{max}})$

**References:** [2]

**Sublimation Pressure  $p_{\text{sub}} = f(t)$** 

Function Name: **psub\_t\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION PSUBCO2(T)**  
 for call from Fortran **REAL\*8 T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_PSUBCO2(PSUB,T)**  
 for call from the DLL **REAL\*8 PSUB,P,T,X**

### Input Values

**T** - Temperature  $t$  in °C

### Result

**PSUBCO2, PSUB** or **psub\_t\_CO2** – Sublimation pressure  $p_{\text{sub}}$  in bar

### Range of Validity (cp. $p,t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\text{min}}$  to  $t_t$

### Results for wrong input values

Result **PSUBCO2 = -1000, PSUB = -1000** or **psub\_t\_CO2 = -1000** for input values:

- at  $t < t_{\text{min}}$  or  $t > t_c$

### References: [2]

**Prandtl-Number  $Pr = f(p, t, x)$** 

Function Name: **Pr\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION PRPTXCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_PRPTXCO2(PR,P,T,X)**  
for call from the DLL **REAL\*8 PR,P,T,X**

**Input Values**

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

**Result**

**PRPTXCO2, PR or Pr\_ptx\_CO2** – Prandtl-Number  $Pr = \frac{\eta^* c_p}{\lambda}$

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_t$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam

**Details on the phase fraction  $x$** 

If the state point to be calculated is located in the single phase region (liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value. Calculating solid is not possible.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp.  $\lg p, h$ -diagram chapter 3.1):

**1. Wet Vapor Region ( $0 \leq x \leq 1$ ):**

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

The calculation for  $x$  values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$   
 Pressure range from  $p_t$  to  $p_c$

**2. Melting Region ( $10 \leq x \leq 11$ ):**

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

The calculation for  $x$  values of  $x = 10$  (melting curve) and between 10 and 11 is not possible.

If solidifying liquid (solidification curve) is to be calculated, the value 11 has to be entered for  $x$ .

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 11 for  $x$  must be entered when calculating solidifying liquid.

If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$   
 Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$   
 Pressure range from  $p_t$  to  $p_{\max}$

### 3. Sublimation Region ( $100 \leq x \leq 101$ ) :

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

The calculation for  $x$  values of  $x = 100$  (sublimation curve) and between 100 and 101 is not possible. If desublimating steam (desublimation curve) is to be calculated, the value 101 has to be entered for  $x$ . Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 101 for  $x$  must be entered when calculating desublimating steam. If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and  
desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$   
Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **PRPTXCO2 = -1000**, **PR = -1000** or **Pr\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Liquid and overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$
- at  $t < t_t$  or  $t > t_{\max}$

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $0 < x < 1$ , i.e. calculation in the wet steam region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $10 < x < 11$ , i.e. calculation on the melting curve and in the melting region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $100 \leq x < 101$ , i.e. calculation on the sublimation curve and in the sublimation region not possible!
- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2], [3]



**Vapor Pressure  $p_s = f(t)$** 

Function Name: **ps\_t\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION PSTCO2(T)**  
 for call from Fortran **REAL\*8 T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_PSTCO2(PS,T)**  
 for call from the DLL **REAL\*8 PS,T**

**Input Values**

T - Temperature  $t$  in °C

**Result**

**PSTCO2, PS or ps\_t\_CO2** – Vapor pressure  $p_s$  in bar

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_l$  to  $t_c$

**Results for wrong input values**

Result **PSTCO2 = -1000, PS = -1000 or ps\_t\_CO2 = -1000** for input values:

- at  $t < t_l$  or  $t > t_c$

**References:** [2]

**Density  $\rho = f(p, t, x)$** 

Function Name: **rho\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION ROPTXCO2(P,T,X)**  
 for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_ROPTXCO2(RHO,P,T,X)**  
 for call from the DLL **REAL\*8 RHO,P,T,X**

**Input Values**

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

**Result**

**RHO\_PTX\_CO2, RHO** or **rho\_ptx\_CO2** - Density  $\rho$  in kg/m<sup>3</sup>

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\min}$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
 from  $p_{\min}$  to  $p_{\max\_Ice}$  for solid

**Details on the phase fraction  $x$** 

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

**1. Wet Vapor Region ( $0 \leq x \leq 1$ ) :**

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for  $x$ .

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$

Pressure range from  $p_t$  to  $p_c$

**2. Melting Region ( $10 \leq x \leq 11$ ) :**

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for  $x$ .

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for  $x$ . In case of solidifying liquid (solidification curve)  $x = 11$  has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 10$  or  $x = 11$ ). If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$

Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$

Pressure range from  $p_t$  to  $p_{\max}$

Only the solidification curve ( $x = 11$ ) is calculated for pressures  $p$  for which applies  $p_{\max\_Ice} < p \leq p_{\max}$ .

### 3. Sublimation Region ( $100 \leq x \leq 101$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for  $x$ .

If sublimating solid is to be calculated, the value 100 has to be entered for  $x$ . In case of desublimating steam  $x = 101$  has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 100$  or  $x = 101$ ). If  $p$  and  $t$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$

Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **RHOPTXCO2 = - 1000**, **RHO = -1000** or **rho\_ptx\_CO2 = - 1000** for input values:

#### Single phase region:

Solid, liquid, overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid
- at  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2]

**Specific Entropy  $s = f(p, t, x)$** 

Function Name: **s\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION SPTXCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_SPTXCO2(S,P,T,X)**  
for call from the DLL **REAL\*8 S,P,T,X**

**Input Values**

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

**Result**

**SPTXCO2, S or s\_ptx\_CO2** - Specific entropy  $s$  in kJ/kg K

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\min}$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
                           from  $p_{\min}$  to  $p_{\max\_Ice}$  for solid

**Details on the phase fraction  $x$** 

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

**1. Wet Vapor Region ( $0 \leq x \leq 1$ ):**

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for  $x$ .

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$

Pressure range from  $p_t$  to  $p_c$

**2. Melting Region ( $10 \leq x \leq 11$ ):**

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for  $x$ .

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for  $x$ . In case of solidifying liquid (solidification curve)  $x = 11$  has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 10$  or  $x = 11$ ). If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$

Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$   
 Pressure range from  $p_t$  to  $p_{\max}$

Only the solidification curve ( $x = 11$ ) is calculated for pressures  $p$  for which applies  $p_{\max\_Ice} < p \leq p_{\max}$ .

### 3. Sublimation Region ( $100 \leq x \leq 101$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for  $x$ .

If sublimating solid is to be calculated, the value 100 has to be entered for  $x$ . In case of desublimating steam  $x = 101$  has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 100$  or  $x = 101$ ). If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and  
 desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$   
 Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **SPTXCO2 = -1000, S = -1000** or **s\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Solid, liquid, overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid
- at  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2]

**Backward Function: Temperature  $t = f(p, h)$** 

Function Name: **t\_ph\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION TPHCO2(P,H)**  
for call from Fortran **REAL\*8 P,H**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_TPHCO2(T,P,H)**  
for call from the DLL **REAL\*8 T,P,H**

**Input Values**

**P** – Pressure  $p$  in bar  
**H** - Specific enthalpy  $h$  in kJ/kg

**Result**

**TPHCO2, T or t\_ph\_CO2** – Temperature  $t$  in °C

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
 from  $p_{\min}$  to  $p_{\max\_Ice}$  for solid

Enthalpy range: from  $h < h_{\max} = h(p_{\min}, t_{\max})$  to  $h > h_{\min} = h(p_{\min}, t_{\min})$

Temperature range: from  $t_{\min}$  to  $t_{\max}$  (resulting from internal calculation of the subprograms)

**Details on calculating the two phase regions**

Using the given values for  $p$  and  $h$ , the program determines whether the point of state to be calculated is located in the single phase region (solid, liquid or steam) or in the two phase region. The two phase regions wet steam region, melting region and sublimation region (cp. lg  $p, h$ -diagram chapter 3.1) are calculated automatically by the subprograms. After that, the calculation is realized for the certain region.

**Results for wrong input values**

Result **T\_PH\_CO2, T = -1000** or **t\_ph\_CO2 = -1000** for input values:

**Single phase region:**

Solid, liquid, overheated steam:  
 - at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid  
 - at calculation result  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

**Two phase regions:**

Wet steam region:  
 - at  $p < p_t$  or  $p > p_c$   
 - at calculation result  $t < t_t$  or  $t > t_c$

## Melting region:

- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid  
 - at calculation result  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

## Sublimation region:

- at  $p < p_{\min}$  or  $p > p_t$   
 - at calculation result  $t < t_{\min}$  or  $t > t_t$

**References:** [2]

## Backward Function: Temperature $t = f(p,s)$

Function Name: **t\_ps\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION TPSCO2(P,S)**  
for call from Fortran REAL\*8 P,S

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_TPSCO2(T,P,S)**  
for call from the DLL REAL\*8 T,P,S

### Input Values

**P** – Pressure  $p$  in bar  
**S** - Specific entropy  $s$  in kJ/(kg K)

### Result

**TPSCO2, T or t\_ps\_CO2** – Temperature  $t$  in °C

### Range of Validity (cp. $p,t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
 from  $p_{\min}$  to  $p_{\max\_Ice}$  for solid

Entropy range: from  $s < s_{\max} = s(p_{\min}, t_{\max})$  to  $s > s_{\min} = s(p_{\min}, t_{\min})$

Temperature range: from  $t_{\min}$  to  $t_{\max}$  (resulting from internal calculation of the subprograms)

### Details on calculating the two phase regions

Using the given values for  $p$  and  $h$ , the program determines whether the point of state to be calculated is located in the single phase region (solid, liquid or steam) or in the two phase region. The two phase regions wet steam region, melting region and sublimation region (cp. lg  $p,h$ -diagram chapter 3.1) are calculated automatically by the subprograms. After that, the calculation is realized for the certain region.

### Results for wrong input values

Result **T\_PS\_CO2, T = -1000** or **t\_ps\_CO2 = -1000** for input values:

#### Single phase region:

Solid, liquid, overheated steam:  
 - at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid  
 - at calculation result  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

#### Two phase regions:

Wet steam region:  
 - at  $p < p_t$  or  $p > p_c$   
 - at calculation result  $t < t_t$  or  $t > t_c$

#### Melting region:

- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid  
 - at calculation result  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

#### Sublimation region:

- at  $p < p_{\min}$  or  $p > p_t$   
 - at calculation result  $t < t_{\min}$  or  $t > t_t$

### References: [2]

**Saturation Temperature  $t_s = f(p)$** 

Function Name: **ts\_p\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION TSPCO2(P)**  
 for call from Fortran **REAL\*8 P**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_TSPCO2(TS,P)**  
 for call from the DLL **REAL\*8 TS,P**

**Input Values**

**P** – Pressure  $p$  in bar

**Result**

**TSPCO2, TS or ts\_p\_CO2** – Saturation temperature  $t_s$  in °C

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_t$  to  $p_c$

**Results for wrong input values**

Result **TSPCO2 = -1000, TS = -1000 or ts\_p\_CO2 = -1000** for input values:

- at  $p < p_t$  or  $p > p_c$

**References:** [2]



**Melting Temperature  $t_{\text{mel}} = f(p)$** 

Function Name: **tmel\_p\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION TMELCO2(P)**  
for call from Fortran **REAL\*8 P**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_TMELCO2(TMEL,P)**  
for call from the DLL **REAL\*8 TMEL,P**

### Input Values

**P** – Pressure  $p$  in bar

### Result

**TMELCO2, TMEL** or **tmel\_p\_CO2** – Melting temperature  $t_{\text{mel}}$  in °C

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_t$  to  $p_{\text{max}}$

### Results for wrong input values

Result **TMELCO2 = -1000**, **TMEL = -1000** or **tmel\_p\_CO2 = -1000** for input values:

- at  $p < p_t$  or  $p > p_{\text{max}}$

### References: [2]

**Sublimation Temperature  $t_{\text{sub}} = f(p)$** 

Function Name: **tsub\_p\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION TSUBCO2(P)**  
 for call from Fortran **REAL\*8 P**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_TSUBCO2(TSUB,P)**  
 for call from the DLL **REAL\*8 TSUB,P**

### Input Values

**P** – Pressure  $p$  in bar

### Result

**TSUBCO2, TSUB** or **tsub\_p\_CO2** – Sublimation temperature  $t_{\text{sub}}$  in °C

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\text{min}}$  to  $p_t$

### Results for wrong input values

Result **TSUBCO2, = -1000, TSUB = -1000** or **tsub\_p\_CO2 = -1000** for input values:

- at  $p < p_{\text{min}}$  or  $p > p_t$

**References:** [2]

**Specific Volume  $v = f(p, t, x)$** 

Function Name: **v\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION VPTXCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_VPTXCO2(V,P,T,X)**  
for call from the DLL **REAL\*8 V,P,T,X**

**Input Values**

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

**Result**

**VPTXCO2, V or v\_ptx\_CO2** – Specific volume  $v$  in m<sup>3</sup>/kg

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\min}$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
                           from  $p_{\min}$  to  $p_{\max\_Ice}$  for solid

**Details on the phase fraction  $x$** 

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

**1. Wet Vapor Region ( $0 \leq x \leq 1$ ):**

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for  $x$ .

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$

Pressure range from  $p_t$  to  $p_c$

**2. Melting Region ( $10 \leq x \leq 11$ ):**

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for  $x$ . In case of solidifying liquid (solidification curve)  $x = 11$  has to be entered.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for  $x$ .

When calculating a melting solid or solidifying liquid it is adequate, concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 10$  or  $x = 11$ ). If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$

Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$   
 Pressure range from  $p_t$  to  $p_{\max}$

Only the solidification curve ( $x = 11$ ) is calculated for pressures  $p$  for which applies  $p_{\max\_Ice} < p \leq p_{\max}$ .

### 3. Sublimation Region ( $100 \leq x \leq 101$ ):

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

If sublimating solid is to be calculated, the value 100 has to be entered for  $x$ . In case of desublimating steam  $x = 101$  has to be entered.

If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for  $x$ .

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for  $t$  and  $p = -1000$  or the value given for  $p$  and  $t = -1000$  and the value for  $x$  ( $x = 100$  or  $x = 101$ ). If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and  
 desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$   
 Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **VPTXCO2 = -1000, H = -1000** or **v\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Solid, liquid, overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  when calculating solid
- at  $t < t_{\min}$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  when calculating solid

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2]

**Isentropic Speed of Sound  $w = f(p, t, x)$** 

Function Name: **w\_ptx\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION WPTXCO2(P,T,X)**  
for call from Fortran **REAL\*8 P,T,X**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_WPTXCO2(W,P,T,X)**  
for call from the DLL **REAL\*8 W,P,T,X**

**Input Values**

**P** – Pressure  $p$  in bar  
**T** - Temperature  $t$  in °C  
**X** -  $x$  in kg / kg (Phase fraction, see the following explanations)

**Result**

**WPTXCO2, W** or **w\_ptx\_CO2** – Speed of sound  $w$  in m/s

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Temperature range: from  $t_t$  to  $t_{\max}$   
 Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam

**Details on the phase fraction  $x$** 

If the state point to be calculated is located in the single phase region (liquid or superheated steam),  $x = -1$  must be entered as a pro-forma value. Calculating solid is not possible.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg  $p, h$ -diagram chapter 3.1):

**1. Wet Vapor Region ( $0 \leq x \leq 1$ ):**

The phase fraction  $x$  equates to the vapor fraction  $x$  in the wet steam region in (kg dry saturated steam)/(kg wet steam).

The calculation for  $x$  values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for  $x$ . In case of dry saturated steam (dew curve)  $x = 1$  has to be entered.

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 0 or 1 for  $x$  must be entered when calculating boiling liquid or dry saturated steam. If  $p$  and  $t$  and  $x$  are entered, the program will consider  $p$  and  $t$  to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from  $t_t$  to  $t_c$   
 Pressure range from  $p_t$  to  $p_c$

**2. Melting Region ( $10 \leq x \leq 11$ ):**

The phase fraction  $x$  equates to the liquid fraction  $x$  in the melting region in (kg solidifying liquid)/(kg melt), whereas melt is a mixture of melting solid and solidifying liquid.

The calculation for  $x$  values of  $x = 10$  (melting curve) and between 10 and 11 is not possible.

If solidifying liquid (solidification curve) is to be calculated, the value 11 has to be entered for  $x$ .

Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 11 for  $x$  must be entered when calculating solidifying liquid.

If  $p$  and  $t$  and  $x$  are entered as given values, the program tests whether  $p$  and  $t$  fulfil the melting pressure curve.

Melting curve: Temperature range from  $t_t$  to  $t_{\max\_Ice}$   
 Pressure range from  $p_t$  to  $p_{\max\_Ice}$

Solidification curve: Temperature range from  $t_t$  to  $t_{\max}$   
 Pressure range from  $p_t$  to  $p_{\max}$

### 3. Sublimation Region ( $100 \leq x \leq 101$ ) :

The phase fraction  $x$  equates to the vapor fraction  $x$  in the sublimation region in (kg desublimating steam)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating solid and desublimating steam.

The calculation for  $x$  values of  $x = 100$  (sublimation curve) and between 100 and 101 is not possible. If desublimating steam (desublimation curve) is to be calculated, the value 101 has to be entered for  $x$ . Concerning pressure and temperature either the given value for  $t$  and  $p = -1000$  or the given value for  $p$  and  $t = -1000$  and in both cases the value 101 for  $x$  must be entered when calculating desublimating steam. If  $p$  and  $t$  and  $x$  are entered as given values the program tests whether  $p$  and  $t$  fulfil the sublimation-pressure-curve.

Sublimation and  
desublimation curve Temperatur range from  $t_{\min}$  to  $t_t$   
Pressure range from  $p_{\min}$  to  $p_t$

### Results for wrong input values

Result **WPTXCO2 = -1000** or **w\_ptx\_CO2 = -1000** for input values:

#### Single phase region:

Liquid and overheated steam ( $x = -1$ ):

- at  $p < p_{\min}$  or  $p > p_{\max}$
- at  $t < t_t$  or  $t > t_{\max}$

#### Two phase regions:

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $0 < x < 1$ , i.e. calculation in the wet steam region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_c$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_c$
- at  $p < p_t$  or  $p > p_c$
- at  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $10 < x < 11$ , i.e. calculation on the melting curve and in the melting region not possible!
- at  $p = -1000$  and  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$
- at  $t = -1000$  and  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_Ice}$  at  $x = 10$
- at  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_Ice}$  at  $x = 10$

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $100 \leq x < 101$ , i.e. calculation on the sublimation curve and in the sublimation region not possible!
- at  $p = -1000$  and  $t < t_{\min}$  or  $t > t_t$
- at  $t = -1000$  and  $p < p_{\min}$  or  $p > p_t$
- at  $p < p_{\min}$  or  $p > p_t$
- at  $t < t_{\min}$  or  $t > t_t$

### References: [2]

**Backward Function: Vapor Fraction  $x = f(p, h)$** 

Function Name: **x\_ph\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION XPHCO2(P,H)**  
for call from Fortran **REAL\*8 P,H**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_XPHCO2(T,P,H)**  
for call from the DLL **REAL\*8 X,P,H**

**Input Values**

**P** – Pressure  $p$  in bar  
**H** - Specific enthalpy  $h$  in kJ/kg

**Result**

**XPHCO2, X or x\_ph\_CO2** – Vapor fraction  $x$  in (kg saturated steam/kg wet steam)

**Range of Validity** (cp.  $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
 from  $p_{\min}$  to  $p_{\max\_ice}$  for solid

Enthalpy range: from  $h < h_{\max} = h(p_{\min}, t_{\max})$  to  $h > h_{\min} = h(p_{\min}, t_{\min})$

Temperature range: from  $t_{\min}$  to  $t_{\max}$  (resulting from internal calculation of the subprograms)

**Details on calculating the two phase regions**

The two phase regions are calculated automatically by the subprograms. Using the given values for  $p$  and  $h$ , the program determines whether the point of state to be calculated is located in the single phase region (solid, liquid or steam) or in one of the two phase regions wet steam region, melting region and sublimation region (cp. lg  $p, h$ -diagram in chapter 3.1). When calculating a two phase mixture,  $x$  will be calculated. If the state point to be calculated is located in the single-phase region the result is set to  $x = -1$ .

**Results for wrong input values**

Result **X\_PH\_CO2, X = -1** or **x\_ph\_CO2 = -1** for input values:

If the state point to be calculated is located in the single phase region (cp. lg  $p, h$ -diagram in chapter 3.1).

**Two phase regions:**

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $p < p_t$  or  $p > p_c$
- at calculation result  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_ice}$  when calculating solid
- at calculation result  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_ice}$  when calculating solid

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $p < p_{\min}$  or  $p > p_t$
- at calculation result  $t < t_{\min}$  or  $t > t_t$

**References:** [2]

**Backward Function: Vapor Fraction  $x = f(p,s)$** 

Function Name: **x\_ps\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION XPSCO2(P,S)**  
for call from Fortran REAL\*8 P,S

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_XPSCO2(X,P,S)**  
for call from the DLL REAL\*8 X,P,S

**Input Values**

**P** – Pressure  $p$  in bar  
**S** - Specific entropy  $s$  in kJ/(kg K)

**Result**

**XPSCO2, X or x\_ps\_CO2** – Vapor fraction  $x$  in (kg saturated steam/kg wet steam)

**Range of Validity** (cp.  $p,t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max}$  for liquid and steam  
from  $p_{\min}$  to  $p_{\max\_ice}$  for solid

Entropy range: from  $s < s_{\max} = s(p_{\min}, t_{\max})$  to  $s > s_{\min} = s(p_{\min}, t_{\min})$

Temperature range: from  $t_{\min}$  to  $t_{\max}$  (resulting from internal calculation of the subprograms)

**Details on calculating the two phase regions**

The two phase regions are calculated automatically by the subprograms. Using the given values for  $p$  and  $s$ , the program determines whether the point of state to be calculated is located in the single phase region (solid, liquid or steam) or in one of the two phase regions wet steam region, melting region and sublimation region (cp. lg  $p,h$ -diagram in chapter 3.1). When calculating a two phase mixture,  $x$  will be calculated. If the state point to be calculated is located in the single-phase region the result is set to  $x = -1$ .

**Results for wrong input values**

Result **X\_PS\_CO2, X = -1** or **x\_ps\_CO2 = -1** for input values:

If the state point to be calculated is located in the single phase region (cp. lg  $p,h$ -diagram in chapter 3.1).

**Two phase regions:**

Wet steam region ( $0 \leq x \leq 1$ ):

- at  $p < p_t$  or  $p > p_c$
- at calculation result  $t < t_t$  or  $t > t_c$

Melting region ( $10 \leq x \leq 11$ ):

- at  $p < p_t$  or  $p > p_{\max}$  or  $p > p_{\max\_ice}$  when calculating solid
- at calculation result  $t < t_t$  or  $t > t_{\max}$  or  $t > t_{\max\_ice}$  when calculating solid

Sublimation region ( $100 \leq x \leq 101$ ):

- at  $p < p_{\min}$  or  $p > p_t$
- at calculation result  $t < t_{\min}$  or  $t > t_t$

**References:** [2]



### 3.3 Property Functions for Solid Carbon Dioxide (Dry Ice)

#### Thermal Diffusivity $a = f(p, t)$

Function Name: **aICE\_pt\_CO2**  
 Subprogram with value of the function: **REAL\*8 FUNCTION AICEPTCO2(P,T)**  
 for call from Fortran **REAL\*8 P,T**  
 Subprogram with parameter: **INTEGER\*4 FUNCTION C\_AICEPTCO2(A,P,T)**  
 for call from the DLL **REAL\*8 A,P,T**

#### Input Values

**P** - Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

#### Result

**AICEPTCO2, a** or **aICE\_pt\_CO2** – Thermal diffusivity  $a = \frac{\lambda * v}{c_p}$  in m<sup>2</sup>/s

#### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max\_Ice}$

Temperature range: from  $t_{\min}$  to  $t_{\max\_Ice}$

#### Results for wrong input values

Result **AICEPTCO2 = -1000, A = -1000** or **aICE\_pt\_CO2 = -1000** for input values:

- at  $t < t_{\min}$  or  $t > t_{\max\_Ice}$
- at  $p < p_{\min}$  or  $p > p_{\max\_Ice}$

#### References: [4], [5]

## Specific Isobaric Heat Capacity $c_p = f(p, t)$

Function Name: **cpICE\_pt\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION CPICEPTCO2(P,T)**  
for call from Fortran **REAL\*8 P,T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_CPICEPTCO2(CP,P,T)**  
for call from the DLL **REAL\*8 CP,P,T**

### Input Values

**P** - Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

### Result

**CPICEPTCO2, CP or cpICE\_t\_CO2** – specific isobaric heat capacity  $c_p$  in kJ/(kg K)

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max\_Ice}$

Temperature range: from  $t_{\min}$  to  $t_{\max\_Ice}$

### Results for wrong input values

Result **CPICEPTCO2 = -1000, CP = -1000 or cpICE\_pt\_CO2 = -1000** for input values:

- at  $t < t_{\min}$  or  $t > t_{\max\_Ice}$
- at  $p < p_{\min}$  or  $p > p_{\max\_Ice}$

### References: [4]

**Specific Enthalpy  $h = f(p,t)$** 

Function Name: **hICE\_pt\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION HICEPTCO2(P,T)**  
for call from Fortran **REAL\*8 P,T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_HICEPTCO2(H,P,T)**  
for call from the DLL **REAL\*8 H,P,T**

**Input Values**

**P** - Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

**Result**

**HICETCO2, H** or **hICE\_t\_CO2** – specific enthalpy  $h$  in kJ / kg

**Range of Validity** (cp.  $p,t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max\_Ice}$

Temperature range: from  $t_{\min}$  to  $t_{\max\_Ice}$

**Results for wrong input values**

Result **HICEPTCO2 = -1000, H = -1000** or **hICE\_pt\_CO2 = -1000** for input values:

- at  $t < t_{\min}$  or  $t > t_{\max\_Ice}$
- at  $p < p_{\min}$  or  $p > p_{\max\_Ice}$

**References:** [4]

## Thermal Conductivity $\lambda = f(t)$

Function Name: **lambdalCE\_t\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION LAMICETCO2(T)**  
for call from Fortran **REAL\*8 T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_LAMICETCO2(LAM,T)**  
for call from the DLL **REAL\*8 LAM,T**

### Input Values

**T** - Temperature  $t$  in °C

### Result

**LAMICETCO2, LAM** or **lambdalCE\_t\_CO2** – Thermal conductivity  $\lambda$  in W/m K

### Range of Validity (cp. $p,t$ -diagram in chapter 3.1)

Temperature range: from  $t_{\min}$  to  $t_{\max\_Ice}$

### Results for wrong input values

Result **LAMICETCO2 = -1000, LAM = -1000** or **lambdalCE\_t\_CO2 = -1000** for input values:

- at  $t < t_{\min}$  or  $t > t_{\max\_Ice}$

### References: [5]

## Density $\rho = f(p, t)$

Function Name: **rhoICE\_pt\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION RHOICEPTCO2(P,T)**  
 for call from Fortran **REAL\*8 P,T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_RHOICEPTCO2(RHO,P,T)**  
 for call from the DLL **REAL\*8 RHO,P,T**

### Input Values

**P** - Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

### Result

**RHOICEPTCO2, RHO** or **rhoICE\_pt\_CO2** - Density  $\rho$  in kg/m<sup>3</sup>

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max\_Ice}$

Temperature range: from  $t_{\min}$  to  $t_{\max\_Ice}$

### Results for wrong input values

Result **RHOICEPTCO2 = -1000, RHO = -1000** or **rhoICE\_pt\_CO2 = -1000** for input values:

- at  $t < t_{\min}$  or  $t > t_{\max\_Ice}$

- at  $p < p_{\min}$  or  $p > p_{\max\_Ice}$

### References: [4]

**Specific Entropy  $s = f(p, t)$** 

Function Name: **sICE\_pt\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION SICEPTCO2(P,T)**  
for call from Fortran **REAL\*8 P,T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_SICEPTCO2(S,P,T)**  
for call from the DLL **REAL\*8 S,P,T**

### Input Values

**P** - Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

### Result

**SICEPTCO2, S** or **sICE\_pt\_CO2** – Specific Entropy  $s$  in kJ/(kg K)

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max\_Ice}$

Temperature range: from  $t_{\min}$  to  $t_{\max\_Ice}$

### Results for wrong input values

Result **SICEPTCO2 = -1000, S = -1000** or **sICE\_pt\_CO2 = -1000** for input values:

- at  $t < t_{\min}$  or  $t > t_{\max\_Ice}$
- at  $p < p_{\min}$  or  $p > p_{\max\_Ice}$

### References: [4]

## Specific Volume $v = f(p, t)$

Function Name: **vICE\_pt\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION VICEPTCO2(P,T)**  
for call from Fortran **REAL\*8 P,T**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_VICETCO2(V,P,T)**  
for call from the DLL **REAL\*8 V,P,T**

### Input Values

**P** - Pressure  $p$  in bar

**T** - Temperature  $t$  in °C

### Result

**VICEPTCO2, V** or **vICE\_pt\_CO2** – specific volume  $v$  in m<sup>3</sup>/kg

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Pressure range: from  $p_{\min}$  to  $p_{\max\_Ice}$

Temperature range: from  $t_{\min}$  to  $t_{\max\_Ice}$

### Results for wrong input values

Result **VICEPTCO2 = -1000, V = -1000** or **vICE\_pt\_CO2 = -1000** for input values:

- at  $t < t_{\min}$  or  $t > t_{\max\_Ice}$
- at  $p < p_{\min}$  or  $p > p_{\max\_Ice}$

### References: [4]

**Backward function: Temperature  $t = f(p, h)$** 

Function Name: **tICE\_ph\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION TICEPHCO2(P,H)**  
 for call from Fortran **REAL\*8 P,H**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_TICEPHCO2(T,P,H)**  
 for call from the DLL **REAL\*8 T,P,H**

### Input Values

**P** - Pressure  $p$  in bar

**H** – Specific enthalpy  $h$  in kJ/kg

### Result

**TICEPHCO2, T or tICE\_ph\_CO2** - Temperature in °C

### Range of Validity (cp. $p, t$ -diagram in chapter 3.1)

Enthalpy range: from  $h > h_{\min} = h(t_{\min})$  to  $h < h_{\max\_Ice} = h(t_{\max\_Ice})$

Pressure range: from  $p_{\min}$  to  $p_{\max\_Ice}$

Temperature range: for results from  $t_{\min}$  to  $t_{\max\_Ice}$

### Results for wrong input values

Result **TICEPHCO2 = -1000, T = -1000 or tICE\_ph\_CO2 = -1000** for input values:

- at  $h < h_{\min} = h(t_{\min})$  or  $h > h_{\max\_Ice} = h(t_{\max\_Ice})$  or

- at  $p < p_{\min}$  or  $p > p_{\max\_Ice}$

### References: [4]



## Backward function: Temperature $t = f(p,s)$

Function Name: **tICE\_ps\_CO2**

Subprogram with value of the function: **REAL\*8 FUNCTION TICEPSCO2(P,S)**  
 for call from Fortran **REAL\*8 P,S**

Subprogram with parameter: **INTEGER\*4 FUNCTION C\_TICEPSCO2(T,P,S)**  
 for call from the DLL **REAL\*8 T,P,S**

### Input Value

**P** - Pressure  $p$  in bar

**S** – Specific Entropy in kJ/(kg K)

### Result

**TICEPSCO2, T or tICE\_ps\_CO2** - Temperature in °C

### Range of Validity (cp. $p,t$ -diagram in chapter 3.1)

Entropy range: from  $s > s_{\min} = s(t_{\min})$  to  $s < s_{\max\_Ice} = s(t_{\max\_Ice})$

Pressure range: from  $p_{\min}$  to  $p_{\max\_Ice}$

Temperature range: for results from  $t_{\min}$  to  $t_{\max\_Ice}$

### Results for wrong input values

Result **TICEPSCO2 = -1000, T = -1000 or tICE\_ps\_CO2 = -1000** for input values:

- at  $s < s_{\min} = s(t_{\min})$  or  $s > s_{\max\_Ice} = s(t_{\max\_Ice})$
- at  $p < p_{\min}$  or  $p > p_{\max\_Ice}$

### References: [4]

## Property Libraries for Calculating Heat Cycles, Boilers, Turbines and Refrigerators

### Water and Steam

#### Library LibIF97

- Industrial Formulation IAPWS-IF97 (Revision 2007)
- Supplementary Standards IAPWS-IF97-S01, -S03rev, -S04, and -S05
- IAPWS Revised Advisory Note No. 3 on Thermodynamic Derivatives (2008)

#### Library LibIF97\_META

- Industrial Formulation IAPWS-IF97 (Revision 2007) for metastable steam

### Humid Combustion Gas Mixtures

#### Library LibHuGas

- Model: Ideal mixture of the real fluids:  
 $\text{CO}_2$  - Span, Wagner  $\text{H}_2\text{O}$  - IAPWS-95  
 $\text{O}_2$  - Schmidt, Wagner  $\text{N}_2$  - Span et al.  
 Ar - Tegeler et al.  
 and of the ideal gases:  
 $\text{SO}_2$ ,  $\text{CO}$ , Ne  
 (Scientific Formulation of Bucker et al.)  
 Consideration of:  
 • Dissociation from VDI 4670  
 • Poynting effect

### Humid Air

#### Library LibHuAir

- Model: Ideal mixture of the real fluids:  
 • Dry air from Lemmon et al.  
 • Steam, water and ice from IAPWS-IF97 and IAPWS-06  
 Consideration of:  
 • Condensation and freezing of steam  
 • Dissociation from VDI 4670  
 • Poynting effect from ASHRAE RP-1485

### Extremely Fast Property Calculations

- Spline-Based Table  
 Look-up Method (SBTL)

#### Library LibSBTL\_IF97 Library LibSBTL\_95 Library LibSBTL\_HuAir

- For steam, water, humid air, carbon dioxide and other fluids and mixtures according IAPWS Guideline 2015 for Computational Fluid Dynamics (CFD), real-time and non-stationary simulations

### Carbon Dioxide Including Dry Ice

#### Library LibCO2

- Formulation of Span and Wagner (1996)

### Seawater

#### Library LibSeaWa

- IAPWS Industrial Formulation 2013

### Ice

#### Library LibICE

- Ice from IAPWS-06, Melting and sublimation pressures from IAPWS-08, Water from IAPWS-IF97, Steam from IAPWS-95 and -IF97

### Ideal Gas Mixtures

#### Library LibIdGasMix

- Model: Ideal mixture of the ideal gases:
- |               |                      |               |            |
|---------------|----------------------|---------------|------------|
| Ar            | NO                   | He            | Propylene  |
| Ne            | $\text{H}_2\text{O}$ | $\text{F}_2$  | Propane    |
| $\text{N}_2$  | $\text{SO}_2$        | $\text{NH}_3$ | Iso-Butane |
| $\text{O}_2$  | $\text{H}_2$         | Methane       | n-Butane   |
| CO            | $\text{H}_2\text{S}$ | Ethane        | Benzene    |
| $\text{CO}_2$ | OH                   | Ethylene      | Methanol   |
| Air           |                      |               |            |

- Consideration of:  
 • Dissociation from the VDI Guideline 4670

#### Library LibIDGAS

- Model: Ideal gas mixture from VDI Guideline 4670  
 Consideration of:  
 • Dissociation from the VDI Guideline 4670

### Humid Air

#### Library ASHRAE LibHuAirProp

- Model: Virial equation from ASHRAE Report RP-1485 for real mixture of the real fluids:  
 - Dry air  
 - Steam

- Consideration of:  
 • Enhancement of the partial saturation pressure of water vapor at elevated total pressures  
[www.ashrae.org/bookstore](http://www.ashrae.org/bookstore)

### Dry Air Including Liquid Air

#### Library LibRealAir

- Formulation of Lemmon et al. (2000)

### Refrigerants

#### Ammonia

#### Library LibNH3

- Formulation of Tillner-Roth et al. (1993)

#### R134a

#### Library LibR134a

- Formulation of Tillner-Roth and Baehr (1994)

#### Iso-Butane

#### Library LibButane\_Iso

- Formulation of Bucker and Wagner (2006)

#### n-Butane

#### Library LibButane\_n

- Formulation of Bucker and Wagner (2006)

### Mixtures for Absorption Processes

#### Ammonia/Water Mixtures

#### Library LibAmWa

- IAPWS Guideline 2001 of Tillner-Roth and Friend (1998)  
 Helmholtz energy equation for the mixing term (also useable for calculating the Kalina Cycle)

#### Water/Lithium Bromide Mixtures

#### Library LibWaLi

- Formulation of Kim and Infante Ferreira (2004)  
 Gibbs energy equation for the mixing term

### Liquid Coolants

#### Liquid Secondary Refrigerants

#### Library LibSecRef

- Liquid solutions of water with
- |                                   |                     |
|-----------------------------------|---------------------|
| $\text{C}_2\text{H}_6\text{O}_2$  | Ethylene glycol     |
| $\text{C}_3\text{H}_8\text{O}_2$  | Propylene glycol    |
| $\text{C}_2\text{H}_5\text{OH}$   | Ethanol             |
| $\text{CH}_3\text{OH}$            | Methanol            |
| $\text{C}_3\text{H}_8\text{O}_3$  | Glycerol            |
| $\text{K}_2\text{CO}_3$           | Potassium carbonate |
| $\text{CaCl}_2$                   | Calcium chloride    |
| $\text{MgCl}_2$                   | Magnesium chloride  |
| $\text{NaCl}$                     | Sodium chloride     |
| $\text{C}_2\text{H}_3\text{KO}_2$ | Potassium acetate   |
| $\text{CHKO}_2$                   | Potassium formate   |
| $\text{LiCl}$                     | Lithium chloride    |
| $\text{NH}_3$                     | Ammonia             |
- Formulation of the International Institute of Refrigeration (IIR 2010)

### Ethanol

#### Library LibC2H5OH

Formulation of  
Schroeder et al. (2014)

### Methanol

#### Library LibCH3OH

Formulation of  
de Reuck and Craven (1993)

### Propane

#### Library LibPropane

Formulation of  
Lemmon et al. (2009)

### Siloxanes as ORC Working Fluids

Octamethylcyclotetrasiloxane  $C_8H_{24}O_4Si_4$  **Library LibD4**

Decamethylcyclopentasiloxane  $C_{10}H_{30}O_5Si_5$  **Library LibD5**

Tetradecamethylhexasiloxane  $C_{14}H_{42}O_6Si_6$  **Library LibMD4M**

Hexamethyldisiloxane  $C_6H_{18}OSi_2$  **Library LibMM**

Formulation of Colonna et al. (2006)

Dodecamethylcyclohexasiloxane  $C_{12}H_{36}O_6Si_6$  **Library LibD6**

Decamethyltetrasiloxane  $C_{10}H_{30}O_3Si_4$  **Library LibMD2M**

Dodecamethylpentasiloxane  $C_{12}H_{36}O_4Si_5$  **Library LibMD3M**

Octamethyltrisiloxane  $C_8H_{24}O_2Si_3$  **Library LibMDM**

Formulation of Colonna et al. (2008)

### Nitrogen and Oxygen

#### Libraries LibN2 and LibO2

Formulations of Span et al. (2000)  
and Schmidt and Wagner (1985)

### Hydrogen

#### Library LibH2

Formulation of  
Leachman et al. (2009)

### Helium

#### Library LibHe

Formulation of  
Arp et al. (1998)

### Hydrocarbons

Decane  $C_{10}H_{22}$  **Library LibC10H22**

Isopentane  $C_5H_{12}$  **Library LibC5H12\_Iso**

Neopentane  $C_5H_{12}$  **Library LibC5H12\_Neo**

Isohexane  $C_6H_{14}$  **Library LibC6H14**

Toluene  $C_7H_8$  **Library LibC7H8**

Formulation of Lemmon and Span (2006)

### Further Fluids

Carbon monoxide **CO** **Library LibCO**

Carbonyl sulfide **COS** **Library LibCOS**


Hydrogen sulfide **H<sub>2</sub>S** **Library LibH2S**

Nitrous oxide **N<sub>2</sub>O** **Library LibN2O**

Sulfur dioxide **SO<sub>2</sub>** **Library LibSO2**

Acetone  $C_3H_6O$  **Library LibC3H6O**

Formulation of Lemmon and Span (2006)

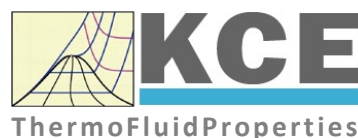

### For more information please contact:

KCE-ThermoFluidProperties UG & Co. KG  
Prof. Dr. Hans-Joachim Kretzschmar  
Wallotstr. 3  
01307 Dresden, Germany

Internet: [www.thermofluidprop.com](http://www.thermofluidprop.com)  
Email: [info@thermofluidprop.com](mailto:info@thermofluidprop.com)  
Phone: +49-351-27597860  
Mobile: +49-172-7914607  
Fax: +49-3222-1095810

## The following thermodynamic and transport properties can be calculated<sup>a</sup>:

### Thermodynamic Properties

- Vapor pressure  $p_s$
- Saturation temperature  $T_s$
- Density  $\rho$
- Specific volume  $v$
- Enthalpy  $h$
- Internal energy  $u$
- Entropy  $s$
- Exergy  $e$
- Isobaric heat capacity  $c_p$
- Isochoric heat capacity  $c_v$
- Isentropic exponent  $\kappa$
- Speed of sound  $w$
- Surface tension  $\sigma$

### Transport Properties

- Dynamic viscosity  $\eta$
- Kinematic viscosity  $\nu$
- Thermal conductivity  $\lambda$
- Prandtl number  $Pr$
- Thermal diffusivity  $a$

### Backward Functions

- $T, v, s(p, h)$
- $T, v, h(p, s)$
- $p, T, v(h, s)$
- $p, T(v, h)$
- $p, T(v, u)$


### Thermodynamic Derivatives

- Partial derivatives used in process modeling can be calculated.

<sup>a</sup> Not all of these property functions are available in all property libraries.


# Property Software for Calculating Heat Cycles, Boilers, Turbines and Refrigerators

Add-In **FluidEXL** Graphics for Excel®

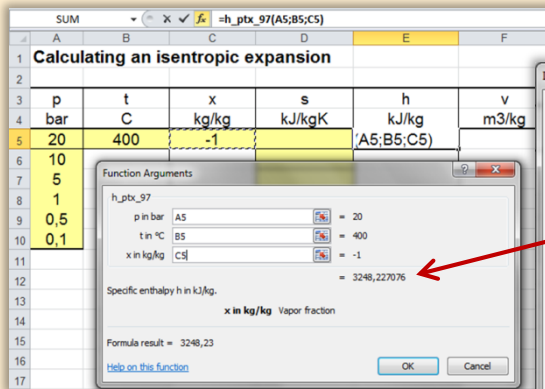


Menu for the input of given property values

Choosing a property library and a function

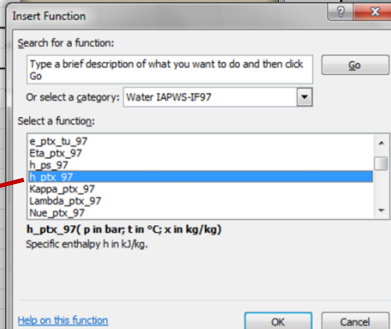


Displaying the calculated values in diagrams

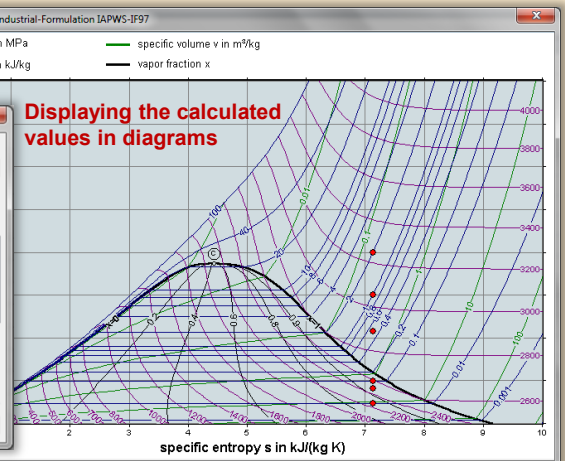

Add-On **FluidMAT** for Mathcad®  
 Add-On **FluidPRIME** for Mathcad Prime®


The property libraries can be used in Mathcad® and Mathcad Prime®.

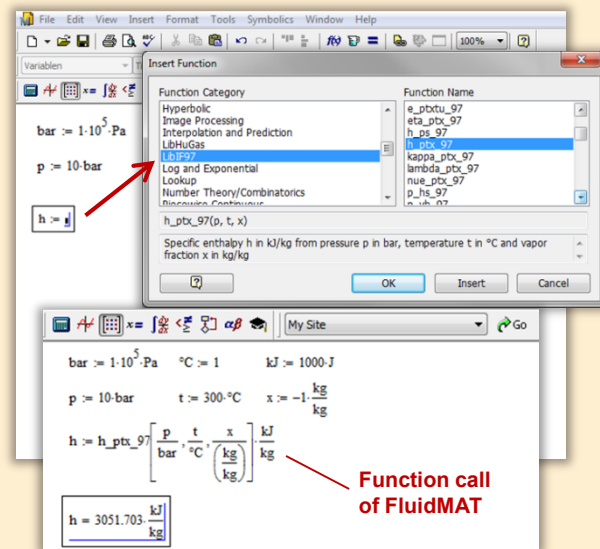

Function call of FluidMAT

Add-On **FluidLAB** for MATLAB® and SIMULINK®


Using the Add-In FluidLAB the property functions can be called in MATLAB® and SIMULINK®.

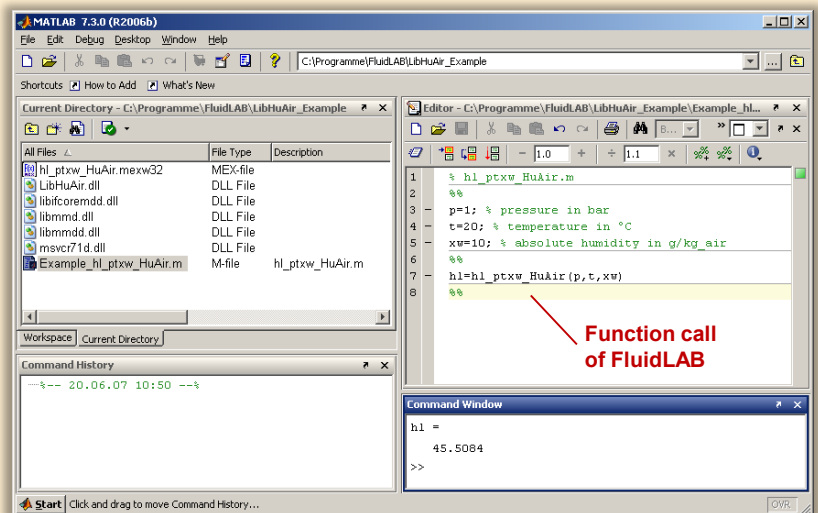

Function call of FluidLAB


Add-On **FluidVIEW** for LabVIEW™

The property functions can be calculated in LabVIEW™.

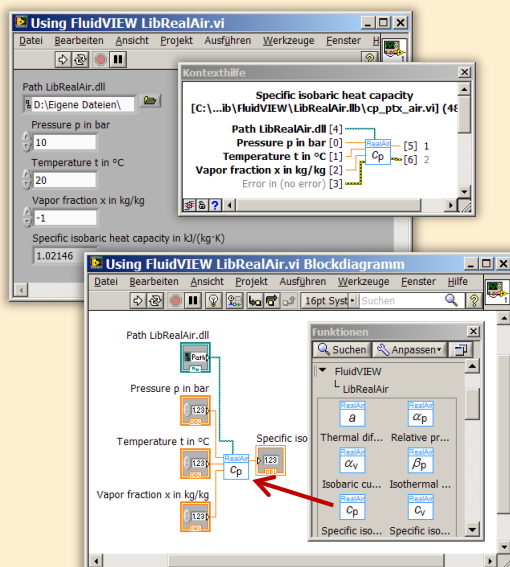


Add-On **FluidDYM** for DYMOLA® (Modelica) and SimulationX®

The property functions can be called in DYMOLA® and SimulationX®.

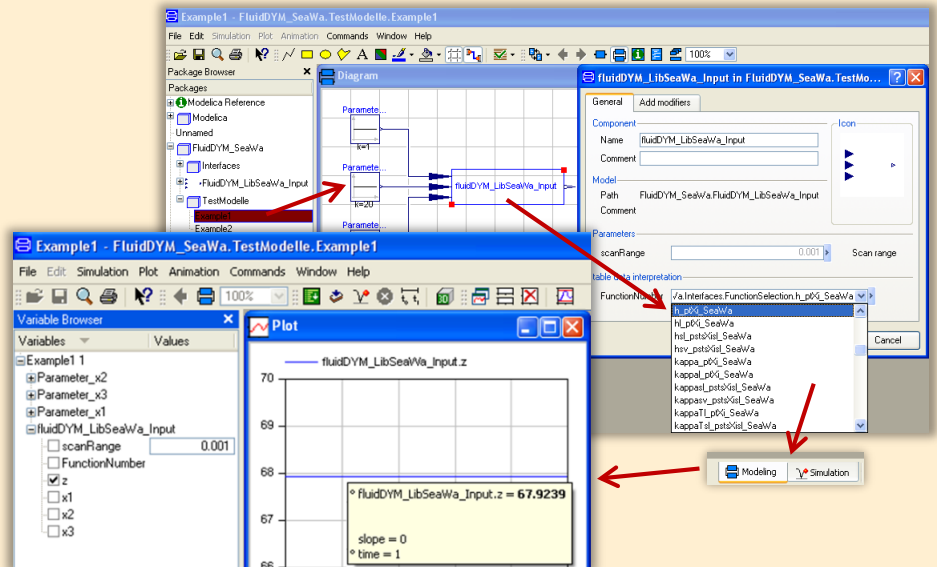




## Add-On **FluidEES** for Engineering Equation Solver®

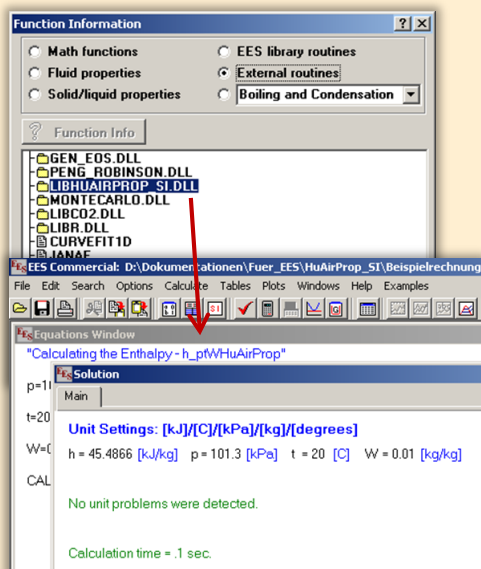

## App International Steam Tables for iPhone, iPad, iPod touch, Android Smartphones and Tablets

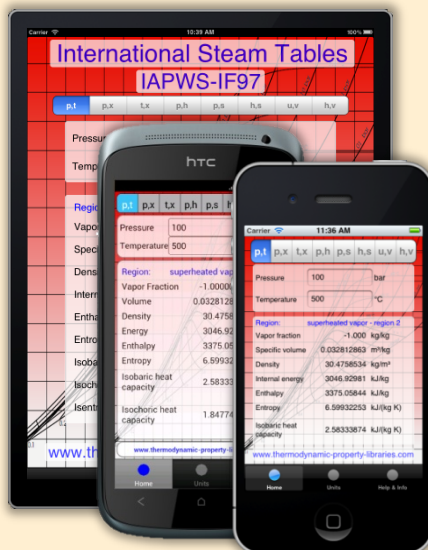

## Online Property Calculator at [www.thermofluidprop.com](http://www.thermofluidprop.com)

**Zittau's Fluid Property Calculator**

Fluid:

Function:

Unit System:

Enter given values: [Range of validity](#)

Pressure p:  bar

Temperature t:  °C

Vapor fraction x:  kg/kg

**Calculate / Recalculate**

**Result:**

Specific enthalpy h = 3097.38 kJ/kg

For further information on property libraries available for EXCEL®, MATLAB®, Mathcad®, Engineering Equation Solver®, DYMOLA® (Modelica), SimulationX®, and LabView® click [here](#)

An App for calculating steam properties on iPhone, iPad, and iPod touch can be found [here](#)

PDF with the description

© Zittau/Görlitz University of Applied Sciences  
Faculty of Mechanical Engineering  
Department of Technical Thermodynamics  
Prof. Hans-Joachim Kretzschmar  
Dr. Ines Stöcker  
Programmer: Joachim Posselt

Tel.: +49-3583-61-1946 or -1981  
Fax: +49-3583-61-1946  
E-mail: [info@thermofluidprop.com](mailto:info@thermofluidprop.com)  
[www.thermofluidprop.com](http://www.thermofluidprop.com)  
[www.thermofluidprop.com](http://www.thermofluidprop.com)  
[www.thermofluidprop.com](http://www.thermofluidprop.com)


## Property Software for Pocket Calculators

### FluidCasio



fx 9750 G II    CFX 9850 fx-GG20    CFX 9860 G Graph 85    ALGEBRA FX 2.0

### FluidHP



HP 48    HP 49

### FluidTI



TI Nspire CX CAS    TI 83    TI 84    TI 89

TI Voyage 200

TI 92

## For more information please contact:



KCE-ThermoFluidProperties UG & Co. KG  
Prof. Dr. Hans-Joachim Kretzschmar  
Wallotstr. 3  
01307 Dresden, Germany

Internet: [www.thermofluidprop.com](http://www.thermofluidprop.com)  
Email: [info@thermofluidprop.com](mailto:info@thermofluidprop.com)  
Phone: +49-351-27597860  
Mobile: +49-172-7914607  
Fax: +49-3222-1095810

The following thermodynamic and transport properties<sup>a</sup> can be calculated in Excel®, MATLAB®, Mathcad®, Engineering Equation Solver® (EES), DYMOLA® (Modelica), SimulationX® and LabVIEW™:

### Thermodynamic Properties

- Vapor pressure  $p_s$
- Saturation temperature  $T_s$
- Density  $\rho$
- Specific volume  $v$
- Enthalpy  $h$
- Internal energy  $u$
- Entropy  $s$
- Exergy  $e$
- Isobaric heat capacity  $c_p$
- Isochoric heat capacity  $c_v$
- Isentropic exponent  $\kappa$
- Speed of sound  $w$
- Surface tension  $\sigma$

### Transport Properties

- Dynamic viscosity  $\eta$
- Kinematic viscosity  $\nu$
- Thermal conductivity  $\lambda$
- Prandtl number  $Pr$
- Thermal diffusivity  $\alpha$

### Backward Functions

- $T, v, s(p, h)$
- $T, v, h(p, s)$
- $p, T, v(h, s)$
- $p, T(v, h)$
- $p, T(v, u)$

### Thermodynamic Derivatives

- Partial derivatives used in process modeling can be calculated.

<sup>a</sup> Not all of these property functions are available in all property libraries.

## 5. References

- [1] Kretzschmar, H.-J.:  
Zur Aufbereitung und Darbietung thermophysikalischer Stoffdaten für die Energietechnik.  
Habilitation, TU Dresden, Fakultät Maschinenwesen (1990)
- [2] Span, R.; Wagner W.:  
A New Equation of State for Carbon Dioxide Covering the Fluid Region from the Triple-Point Temperature to 1100 K at Pressures up to 800 MPa.  
J. Phys. Chem. Ref. Data, 25, (1996) Nr. 6, S. 1506-1596
- [3] Vesovic, V.; Wakeham, W. A.; Olchowky, G. A.; Sengers, J. V.; Watson, J. T. R.; Millat, J.:  
The Transport Properties of Carbon Dioxide.  
J. Phys. Chem. Ref. Data, 19, (1990) Nr. 3, S. 763-808
- [4] Jäger, A.; Span, R.:  
Equation of State for Solid Carbon Dioxide Based on the Gibbs Free Energy.  
J. Chem. Eng. Data 57 (2012), 590-597
- [5] Kuprianoff, J.:  
Die feste Kohlensäure (Trockeneis) – Herstellung und Verwendung  
Ferdinand Enke Verlag Stuttgart, 1953

## 6. Satisfied Customers

Date: 07/2019

The following companies and institutions use the property libraries:

- FluidEXL *Graphics* for Excel®
- FluidLAB for MATLAB® and Simulink
- FluidMAT for Mathcad®
- FluidPRIME for Mathcad Prime®
- FluidEES for Engineering Equation Solver® EES
- FluidDYM for Dymola® (Modelica) and SimulationX®
- FluidVIEW for LabVIEW™
- DLLs for Windows™
- Shared Objects for Linux®.

### 2019

WARNICA, Waterloo, Canada	07/2019
MIBRAG, Zeitz	06/2019
Pöyry, Zürich, Switzerland	06/2019
RWTH Aachen, Inst. Strahlantriebe und Turbomaschinen	06/2019
Midiplan, Bietigheim-Bissingen	06/2019
GKS Schweinfurt	06/2019
HS Zittau/Görlitz, Wirtschaftswissenschaften und Wirtschaftsingenieurwesen	06/2019
ILK Dresden	06/2019
HZDR Helmholtz Zentrum Dresden-Rossendorf	06/2019
TH Köln, TGA	05/2019
IB Knittel, Braunschweig	05/2019
Norsk Energi, Oslo, Norway	05/2019
STEAG Essen	05/2019
Stora Enso, Eilenburg	05/2019
IB Lücke, Paderborn	05/2019
Haarslev, Sønderborg, Denmark	05/2019
MAN Augsburg	05/2019
Wieland Werke, Ulm	04/2019
Fels-Werke, Elbingerode	04/2019
Univ. Luxembourg Luxembourg	04/2019
BTU Cottbus, Power Engineering	03/2009
Eins-Energie Sachsen, Schwarzenberg	03/2019
TU Dresden, Kälte- und Kryotechnik	03/2019
ITER, St. Paul Lez Durance Cedex, France	03/2019
Fraunhofer UMSICHT, Oberhausen	03/2019
Comparex Leipzig for Spedition Thiele HEMMERSBACH	03/2019
Rückert NaturGas, Lauf/Pegnitz	03/2019
BASF, Basel, Switzerland	02/2019
Stadtwerke Leipzig	02/2019

Maerz Ofenbau Zürich, Switzerland	02/2019
Hanon Systems Germany, Kerpen	02/2019
Thermofin, Heinsdorfergrund	01/2019
BSH Berlin	01/2019

## 2018

Jaguar Energy, Guatemala	12/2018
WEBASTO, Gilching	12/2018
Smurfit Kappa, Oosterhout, Netherlands	12/2018
Univ. BW München	12/2018
RAIV, Liberec for VALEO, Prague, Czech Republic	11/2018
VPC Group Vetschau	11/2018
SEITZ, Wetzikon, Switzerland	11/2018
MVV, Mannheim	10/2018
IB Troche	10/2018
KANIS Turbinen, Nürnberg	10/2018
TH Ingolstadt, Institut für neue Energiesysteme	10/2018
IB Kristl & Seibt, Graz, Austria	09/2018
INEOS, Köln	09/2018
IB Lücke, Paderborn	09/2018
Südzucker, Ochsenfurt	08/2018
K&K Turbinenservice, Bielefeld	07/2018
OTH Regensburg, Elektrotechnik	07/2018
Comparex Leipzig for LEAG, Berlin	06/2018
Münstermann, Telgte	05/2018
TH Nürnberg, Verfahrenstechnik	05/2018
Universität Madrid, Madrid, Spanien	05/2018
HS Zittau/Görlitz, Wirtschaftswissenschaften und Wirtschaftsingenieurwesen	05/2018
HS Niederrhein, Krefeld	05/2018
Wilhelm-Büchner HS, Pfungstadt	03/2018
GRS, Köln	03/2018
WIB, Dennheritz	03/2018
RONAL AG, Härkingen, Schweiz	02/2018
Ingenieurbüro Leipert, Riegelsberg	02/2018
AIXPROCESS, Aachen	02/2018
KRONES, Neutraubling	02/2018
Doosan Lentjes, Ratingen	01/2018

## 2017

Compact Kältetechnik, Dresden	12/2017
Endress + Hauser Messtechnik GmbH +Co. KG, Hannover	12/2017
TH Mittelhessen, Gießen	11/2017
Haarslev Industries, Sønderød, Denmark	11/2017
Hochschule Zittau/Görlitz, Fachgebiet Energiesystemtechnik	11/2017
ATESTEO, Alsdorf	10/2017
Wijbenga, PC Geldermalsen, Netherlands	10/2017
Fels-Werke GmbH, Elbingerode	10/2017



KIT Karlsruhe, Institute für Neutronenphysik und Reaktortechnik	09/2017
Air-Consult, Jena	09/2017
Papierfabrik Koehler, Oberkirch	09/2017
ZWILAG, Würenlingen, Switzerland	09/2017
TLK-Thermo Universität Braunschweig, Braunschweig	08/2017
Fichtner IT Consulting AG, Stuttgart	07/2017
Hochschule Ansbach, Ansbach	06/2017
RONAL, Härkingen, Switzerland	06/2017
BORSIG Service, Berlin	06/2017
BOGE Kompressoren, Bielefeld	06/2017
STEAG Energy Services, Zwingenberg	06/2017
CES clean energy solutions, Wien, Austria	04/2017
Princeton University, Princeton, USA	04/2017
B2P Bio-to-Power, Wadersloh	04/2017
TU Dresden, Institute for Energy Engineering, Dresden	04/2017
SAINT-GOBAIN, Vaujours, France	03/2017
TU Bergakademie Freiberg, Chair of Thermodynamics, Freiberg	03/2017
SCHMIDT + PARTNER, Therwil, Switzerland	03/2017
KAESER Kompressoren, Gera	03/2017
F&R, Praha, Czech Republic	03/2017
ULT Umwelt-Lufttechnik, Löbau	02/2017
JS Energie & Beratung, Erding	02/2017
Kelvion Brazed PHE, Nobitz-Wilchwitz	02/2017
MTU Aero Engines, München	02/2017
Hochschule Zittau/Görlitz, IPM	01/2017
CombTec ProCE, Zittau	01/2017
SHELL Deutschland Oil, Wesseling	01/2017
MARTEC Education Center, Frederikshaven, Denmark	01/2017
SynErgy Thermal Management, Krefeld	01/2017

## 2016

BOGE Druckluftsysteme, Bielefeld	12/2016
BFT Planung, Aachen	11/2016
Midiplan, Bietigheim-Bissingen	11/2016
BBE Barnich IB	11/2016
Wenisch IB,	11/2016
INL, Idaho Falls	11/2016
TU Kältetechnik, Dresden	11/2016
Kopf SynGas, Sulz	11/2016
INTVEN, Bellevue (USA)	11/2016
DREWAG Dresden, Dresden	10/2016
AGO AG Energie+Anlagen, Kulmbach	10/2016
Universität Stuttgart, ITW, Stuttgart	09/2016
Pöyry Deutschland GmbH, Dresden	09/2016
Siemens AG, Erlangen	09/2016
BASF über Fichtner IT Consulting AG	09/2016
B+B Engineering GmbH, Magdeburg	09/2016
Wilhelm Büchner Hochschule, Pfungstadt	08/2016

Webasto Thermo & Comfort SE, Gliching	08/2016
TU Dresden, Dresden	08/2016
Endress+Hauser Messtechnik GmbH+Co. KG, Hannover	08/2016
D + B Kältetechnik, Althausen	07/2016
Fichtner IT Consulting AG, Stuttgart	07/2016
AB Electrolux, Krakow, Poland	07/2016
ENEXIO Germany GmbH, Herne	07/2016
VPC GmbH, Vetschau/Spreewald	07/2016
INWAT, Lodz, Poland	07/2016
E.ON SE, Düsseldorf	07/2016
Planungsbüro Waidhas GmbH, Chemnitz	07/2016
EEB Enerko, Aldershoven	07/2016
IHEBA Naturenergie GmbH & Co. KG, Pfaffenhofen	07/2016
SSP Kälteplaner AG, Wolfertschwenden	07/2016
EEB ENERKO Energiewirtschaftliche Beratung GmbH, Berlin	07/2016
BOGE Kompressoren Otto BOGE GmbH & Co KG, Bielefeld	06/2016
Universidad Carlos III de Madrid, Madrid, Spain	04/2016
INWAT, Lodzi, Poland	04/2016
Planungsbüro Waidhas GmbH, Chemnitz	04/2016
STEAG Energy Services GmbH, Laszlo Küppers, Zwingenberg	03/2016
WULFF & UMAG Energy Solutions GmbH, Husum	03/2016
FH Bielefeld, Bielefeld	03/2016
EWT Eckert Wassertechnik GmbH, Celle	03/2016
ILK Institut für Luft- und Kältetechnik GmbH, Dresden	02/2016, 06/2016
IEV KEMA - DNV GV – Energie, Dresden	02/2016
Allborg University, Department of Energie, Aalborg, Denmark	02/2016
G.A.M. Heat GmbH, Gräfenhainichen	02/2016
Institut für Luft- und Kältetechnik, Dresden	02/2016, 05/2016, 06/2016
Bosch, Stuttgart	02/2016
INL Idaho National Laboratory, Idaho, USA	11/2016, 01/2016
Friedl ID, Wien, Austria	01/2016
Technical University of Dresden, Dresden	01/2016

## 2015

EES Enerko, Aachen	12/2015
Rudolf IB, Strau, Austria	12/2015
Allborg University, Department of Energie, Aalborg, Denmark	12/2015
University of Lyubljana, Slovenia	12/2015
Steinbrecht IB, Berlin	11/2015
Universidad Carlos III de Madrid, Madrid, Spain	11/2015
STEAK, Essen	11/2015
Bosch, Lohmar	10/2015
Team Turbo Machines, Rouen, France	09/2015
BTC – Business Technology Consulting AG, Oldenburg	07/2015
KIT Karlsruhe Institute of Technology, Eggenstein-Leopoldshafen	07/2015
ILK, Dresden	07/2015
Schniewindt GmbH & Co. KG, Neuenwalde	08/2015

## 2014

PROJEKTPLAN, Dohna	04/2014
Technical University of Vienna, Austria	04/2014
MTU Aero Engines AG, Munich	04/2014
GKS, Schweinfurt	03/2014
Technical University of Nuremberg	03/2014
EP-E, Niederstetten	03/2014
Rückert NatUrgas GmbH, Lauf	03/2014
YESS-World, South Korea	03/2014
ZAB, Dessau	02/2014
KIT-TVT, Karlsruhe	02/2014
Stadtwerke Neuburg	02/2014
COMPAREX, Leipzig for RWE Essen	02/2014
Technical University of Prague, Czech Republic	02/2014
HS Augsburg	02/2014
Envi-con, Nuremberg	01/2014
DLR, Stuttgart	01/2014
Doosan Lentjes, Ratingen	01/2014
Technical University of Berlin	01/2014
Technical University of Munich	01/2014
Technical University of Braunschweig	01/2014
M&M Turbinentechnik, Bielefeld	01/2014

## 2013

TRANTER-GmbH, Artern	12/2013
SATAKE, Shanghai, China	12/2013
VOITH, Kunshan, China	12/2013
ULT, Löbau	12/2013
MAN, Copenhagen, Dänemark	11/2013
DREWAG, Dresden	11/2013
Haarslev Industries, Herlev, Dänemark	11/2013
STEAG, Herne	11/2013, 12/2013
Ingersoll-Rand, Oberhausen	11/2013
Wilhelm-Büchner HS, Darmstadt	10/2013
IAV, Chemnitz	10/2013
Technical University of Regensburg	10/2013
PD-Energy, Bitterfeld	09/2013
Thermofin, Heinsdorfergrund	09/2013
SHI, New Jersey, USA	09/2013
M&M Turbinentechnik, Bielefeld	08/2013
BEG-BHV, Bremerhaven	08/2013
TIG-Group, Husum	08/2013
COMPAREX, Leipzig for RWE Essen	08/2013, 11/2013 12/2013
University of Budapest, Hungary	08/2013
Siemens, Frankenthal	08/2013, 10/2013

	11/2013
VGB, Essen	07/2013, 11/2013
Brunner Energieberatung, Zurich, Switzerland	07/2013
Technical University of Deggendorf	07/2013
University of Maryland, USA	07/2013, 08/2013
University of Princeton, USA	07/2013
NIST, Boulder, USA	06/2013
IGUS GmbH, Dresden	06/2013
BHR Bilfinger, Essen	06/2013
SÜDSALZ, Bad Friedrichshall	06/2013, 12/2013
Technician School of Berlin	05/2013
KIER, Gajeong-ro, Südkorea	05/2013
Schwing/Stetter GmbH, Memmingen	05/2013
Vattenfall, Berlin	05/2013
AUTARK, Kleinmachnow	05/2013
STEAG, Zwingenberg	05/2013
Hochtief, Düsseldorf	05/2013
University of Stuttgart	04/2013
Technical University -Bundeswehr, Munich	04/2013
Rerum Cognitio Forschungszentrum, Frankfurt	04/2013
Kältetechnik Dresden + Bremen, Alfhausen	04/2013
University Auckland, New Zealand	04/2013
MASDAR Institut, Abu Dhabi, United Arab Emirates	03/2013
Simpelkamp, Dresden	02/2013
VEO, Eisenhüttenstadt	02/2013
ENTEC, Auerbach	02/2013
Caterpillar, Kiel	02/2013
Technical University of Wismar	02/2013
Technical University of Dusseldorf	02/2013
ILK, Dresden	01/2013, 08/2013
Fichtner IT, Stuttgart	01/2013, 11/2013
Schnepf Ingeniuerbüro, Nagold	01/2013
Schütz Engineering, Wadgassen	01/2013
Endress & Hauser, Reinach, Switzerland	01/2013
Oschatz GmbH, Essen	01/2013
frischli Milchwerke, Rehburg-Loccum	01/2013

## 2012

Voith, Bayreuth	12/2012
Technical University of Munich	12/2012
Dillinger Huette	12/2012
University of Stuttgart	11/2012
Siemens, Muehlheim	11/2012
Sennheiser, Hannover	11/2012
Oschatz GmbH, Essen	10/2012
Fichtner IT, Stuttgart	10/2012, 11/2012
Helbling Technik AG, Zurich, Switzerland	10/2012
University of Duisburg	10/2012

Rerum Cognitio Forschungszentrum, Frankfurt	09/2012
Pöyry Deutschland GmbH, Dresden	08/2012
Extracciones, Guatemala	08/2012
RWE, Essen	08/2012
Weghaus Consulting Engineers, Wuerzburg	08/2012
GKS, Schweinfurt	07/2012
COMPAREX, Leipzig for RWE Essen	07/2012
GEA, Nobitz	07/2012
Meyer Werft, Papenburg	07/2012
STEAG, Herne	07/2012
GRS, Cologne	06/2012
Fichtner IT Consult, Chennai, India	06/2012
Siemens, Freiburg	06/2012
Nikon Research of America, Belmont, USA	06/2012
Niederrhein University of Applied Sciences, Krefeld	06/2012
STEAG, Zwingenberg	06/2012
Mainova, Frankfurt on Main via Fichtner IT Consult	05/2012
Endress & Hauser	05/2012
PEU, Espenheim	05/2012
Luzern University of Applied Sciences, Switzerland	05/2012
BASF, Ludwigshafen (general license) via Fichtner IT Consult	05/2012
SPX Balcke-Dürr, Ratingen	05/2012, 07/2012
Gruber-Schmidt, Wien, Austria	04/2012
Vattenfall, Berlin	04/2012
ALSTOM, Baden	04/2012
SKW, Piesteritz	04/2012
TERA Ingegneria, Trento, Italy	04/2012
Siemens, Erlangen	04/2012, 05/2012
LAWI Power, Dresden	04/2012
Stadtwerke Leipzig	04/2012
SEITZ, Wetzikon, Switzerland	03/2012, 07/2012
M & M, Bielefeld	03/2012
Sennheiser, Wedemark	03/2012
SPG, Montreuil Cedex, France	02/2012
German Destillation, Sprendlingen	02/2012
Lopez, Munguia, Spain	02/2012
Endress & Hauser, Hannover	02/2012
Palo Alto Research Center, USA	02/2012
WIPAK, Walsrode	02/2012
Freudenberg, Weinheim	01/2012
Fichtner, Stuttgart	01/2012
airinotec, Bayreuth	01/2012, 07/2012
University Auckland, New Zealand	01/2012
VPC, Vetschau	01/2012
Franken Guss, Kitzingen	01/2012

## 2011

XRG-Simulation, Hamburg	12/2011
Smurfit Kappa PPT, AX Roermond, Netherlands	12/2011
AWTEC, Zurich, Switzerland	12/2011
eins-energie, Bad Elster	12/2011
BeNow, Rodenbach	11/2011
Luzern University of Applied Sciences, Switzerland	11/2011
GMVA, Oberhausen	11/2011
CCI, Karlsruhe	10/2011
W.-Büchner University of Applied Sciences, Pfungstadt	10/2011
PLANAIR, La Sagne, Switzerland	10/2011
LAWI, Dresden	10/2011
Lopez, Munguia, Spain	10/2011
University of KwaZulu-Natal, Westville, South Africa	10/2011
Voith, Heidenheim	09/2011
SpgBe Montreal, Canada	09/2011
SPG TECH, Montreuil Cedex, France	09/2011
Voith, Heidenheim-Mergelstetten	09/2011
MTU Aero Engines, Munich	08/2011
MIBRAG, Zeitz	08/2011
RWE, Essen	07/2011
Fels, Elingerode	07/2011
Weihenstephan University of Applied Sciences	07/2011, 09/2011
	10/2011
Forschungszentrum Juelich	07/2011
RWTH Aachen University	07/2011, 08/2011
INNEO Solutions, Ellwangen	06/2011
Caliqua, Basel, Switzerland	06/2011
Technical University of Freiberg	06/2011
Fichtner IT Consulting, Stuttgart	05/2011, 06/2011,
	08/2011
Salzgitter Flachstahl, Salzgitter	05/2011
Helbling Beratung & Bauplanung, Zurich, Switzerland	05/2011
INEOS, Cologne	04/2011
Enseleit Consulting Engineers, Siebigerode	04/2011
Witt Consulting Engineers, Stade	03/2011
Helbling, Zurich, Switzerland	03/2011
MAN Diesel, Copenhagen, Denmark	03/2011
AGO, Kulmbach	03/2011
University of Duisburg	03/2011, 06/2011
CCP, Marburg	03/2011
BASF, Ludwigshafen	02/2011
ALSTOM Power, Baden, Switzerland	02/2011
Universität der Bundeswehr, Munich	02/2011
Calorifer, Elgg, Switzerland	01/2011
STRABAG, Vienna, Austria	01/2011
TUEV Sued, Munich	01/2011

ILK Dresden  
 Technical University of Dresden

01/2011  
 01/2011, 05/2011  
 06/2011, 08/2011

## 2010

Umweltinstitut Neumarkt	12/2010
YIT Austria, Vienna, Austria	12/2010
MCI Innsbruck, Austria	12/2010
University of Stuttgart	12/2010
HS Cooler, Wittenburg	12/2010
Visteon, Novi Jicin, Czech Republic	12/2010
CompuWave, Brunntal	12/2010
Stadtwerke Leipzig	12/2010
MCI Innsbruck, Austria	12/2010
EVONIK Energy Services, Zwingenberg	12/2010
Caliqua, Basel, Switzerland	11/2010
Shanghai New Energy Resources Science & Technology, China	11/2010
Energieversorgung Halle	11/2010
Hochschule für Technik Stuttgart, University of Applied Sciences	11/2010
Steinmueller, Berlin	11/2010
Amberg-Weiden University of Applied Sciences	11/2010
AREVA NP, Erlangen	10/2010
MAN Diesel, Augsburg	10/2010
KRONES, Neutraubling	10/2010
Vaillant, Remscheid	10/2010
PC Ware, Leipzig	10/2010
Schubert Consulting Engineers, Weißenberg	10/2010
Fraunhofer Institut UMSICHT, Oberhausen	10/2010
Behringer Consulting Engineers, Tagmersheim	09/2010
Saacke, Bremen	09/2010
WEBASTO, Neubrandenburg	09/2010
Concordia University, Montreal, Canada	09/2010
Compañía Eléctrica de Sochagota, Bogota, Colombia	08/2010
Hannover University of Applied Sciences	08/2010
ERGION, Mannheim	07/2010
Fichtner IT Consulting, Stuttgart	07/2010
TF Design, Matieland, South Africa	07/2010
MCE, Berlin	07/2010, 12/2010
IPM, Zittau/Goerlitz University of Applied Sciences	06/2010
TUEV Sued, Dresden	06/2010
RWE IT, Essen	06/2010
Glen Dimplex, Kulmbach	05/2010, 07/2010
	10/2010
Hot Rock, Karlsruhe	05/2010
Darmstadt University of Applied Sciences	05/2010
Voith, Heidenheim	04/2010
CombTec, Zittau	04/2010
University of Glasgow, Great Britain	04/2010

Universitaet der Bundeswehr, Munich	04/2010
Technical University of Hamburg-Harburg	04/2010
Vattenfall Europe, Berlin	04/2010
HUBER Consulting Engineers, Berching	04/2010
VER, Dresden	04/2010
CCP, Marburg	03/2010
Offenburg University of Applied Sciences	03/2010
Technical University of Berlin	03/2010
NIST Boulder CO, USA	03/2010
Technical University of Dresden	02/2010
Siemens Energy, Nuremberg	02/2010
Augsburg University of Applied Sciences	02/2010
ALSTOM Power, Baden, Switzerland	02/2010, 05/2010
MIT Massachusetts Institute of Technology Cambridge MA, USA	02/2010
Wieland Werke, Ulm	01/2010
Siemens Energy, Goerlitz	01/2010, 12/2010
Technical University of Freiberg	01/2010
ILK, Dresden	01/2010, 12/2010
Fischer-Uhrig Consulting Engineers, Berlin	01/2010

## 2009

ALSTOM Power, Baden, Schweiz	01/2009, 03/2009
	05/2009
Nordostschweizerische Kraftwerke AG, Doettingen, Switzerland	02/2009
RWE, Neurath	02/2009
Brandenburg University of Technology, Cottbus	02/2009
Hamburg University of Applied Sciences	02/2009
Kehrein, Moers	03/2009
EPP Software, Marburg	03/2009
Bernd Münstermann, Telgte	03/2009
Suedzucker, Zeitz	03/2009
CPP, Marburg	03/2009
Gelsenkirchen University of Applied Sciences	04/2009
Regensburg University of Applied Sciences	05/2009
Gatley & Associates, Atlanta, USA	05/2009
BOSCH, Stuttgart	06/2009, 07/2009
Dr. Nickolay, Consulting Engineers, Gommersheim	06/2009
Ferrostal Power, Saarlouis	06/2009
BHR Bilfinger, Essen	06/2009
Intraserv, Wiesbaden	06/2009
Lausitz University of Applied Sciences, Senftenberg	06/2009
Nuernberg University of Applied Sciences	06/2009
Technical University of Berlin	06/2009
Fraunhofer Institut UMSICHT, Oberhausen	07/2009
Bischoff, Aurich	07/2009
Fichtner IT Consulting, Stuttgart	07/2009
Techsoft, Linz, Austria	08/2009
DLR, Stuttgart	08/2009



Wienstrom, Vienna, Austria	08/2009
RWTH Aachen University	09/2009
Vattenfall, Hamburg	10/2009
AIC, Chemnitz	10/2009
Midiplan, Bietigheim-Bissingen	11/2009
Institute of Air Handling and Refrigeration ILK, Dresden	11/2009
FZD, Rossendorf	11/2009
Techgroup, Ratingen	11/2009
Robert Sack, Heidelberg	11/2009
EC, Heidelberg	11/2009
MCI, Innsbruck, Austria	12/2009
Saacke, Bremen	12/2009
ENERKO, Aldenhoven	12/2009

## 2008

Pink, Langenwang	01/2008
Fischer-Uhrig, Berlin	01/2008
University of Karlsruhe	01/2008
MAAG, Kuesnacht, Switzerland	02/2008
M&M Turbine Technology, Bielefeld	02/2008
Lentjes, Ratingen	03/2008
Siemens Power Generation, Goerlitz	04/2008
Evonik, Zwingenberg (general EBSILON program license)	04/2008
WEBASTO, Neubrandenburg	04/2008
CFC Solutions, Munich	04/2008
RWE IT, Essen	04/2008
Rerum Cognitio, Zwickau	04/2008, 05/2008
ARUP, Berlin	05/2008
Research Center, Karlsruhe	07/2008
AWECO, Neukirch	07/2008
Technical University of Dresden, Professorship of Building Services	07/2008
Technical University of Cottbus, Chair in Power Plant Engineering	07/2008, 10/2008
Ingersoll-Rand, Unicov, Czech Republic	08/2008
Technip Benelux BV, Zoetermeer, Netherlands	08/2008
Fennovoima Oy, Helsinki, Finland	08/2008
Fichtner Consulting & IT, Stuttgart	09/2008
PEU, Espenhain	09/2008
Poyry, Dresden	09/2008
WINGAS, Kassel	09/2008
TUEV Sued, Dresden	10/2008
Technical University of Dresden, Professorship of Thermic Energy Machines and Plants	10/2008, 11/2008
AWTEC, Zurich, Switzerland	11/2008
Siemens Power Generation, Erlangen	12/2008

## 2007

Audi, Ingolstadt	02/2007
ANO Abfallbehandlung Nord, Bremen	02/2007
TUEV NORD SysTec, Hamburg	02/2007
VER, Dresden	02/2007
Technical University of Dresden, Chair in Jet Propulsion Systems	02/2007
Redacom, Nidau, Switzerland	02/2007
Universität der Bundeswehr, Munich	02/2007
Maxxtec, Sinsheim	03/2007
University of Rostock, Chair in Technical Thermodynamics	03/2007
AGO, Kulmbach	03/2007
University of Stuttgart, Chair in Aviation Propulsions	03/2007
Siemens Power Generation, Duisburg	03/2007
ENTHAL Haustechnik, Rees	05/2007
AWECO, Neukirch	05/2007
ALSTOM, Rugby, Great Britain	06/2007
SAAS, Possendorf	06/2007
Grenzebach BSH, Bad Hersfeld	06/2007
Reichel Engineering, Haan	06/2007
Technical University of Cottbus, Chair in Power Plant Engineering	06/2007
Voith Paper Air Systems, Bayreuth	06/2007
Egger Holzwerkstoffe, Wismar	06/2007
Tissue Europe Technologie, Mannheim	06/2007
Dometic, Siegen	07/2007
RWTH Aachen University, Institute for Electrophysics	09/2007
National Energy Technology Laboratory, Pittsburg, USA	10/2007
Energieversorgung Halle	10/2007
AL-KO, Jettingen	10/2007
Grenzebach BSH, Bad Hersfeld	10/2007
Wiesbaden University of Applied Sciences, Department of Engineering Sciences	10/2007
Endress+Hauser Messtechnik, Hannover	11/2007
Munich University of Applied Sciences, Department of Mechanical Engineering	11/2007
Rerum Cognitio, Zwickau	12/2007
Siemens Power Generation, Erlangen	11/2007
University of Rostock, Chair in Technical Thermodynamics	11/2007, 12/2007

## 2006

STORA ENSO Sachsen, Eilenburg	01/2006
Technical University of Munich, Chair in Energy Systems	01/2006
NUTEC Engineering, Bisikon, Switzerland	01/2006, 04/2006
Conwel eco, Bochov, Czech Republic	01/2006
Offenburg University of Applied Sciences	01/2006
KOCH Transporttechnik, Wadgassen	01/2006
BEG Bremerhavener Entsorgungsgesellschaft	02/2006
Deggendorf University of Applied Sciences, Department of Mechanical Engineering and Mechatronics	02/2006
University of Stuttgart,	02/2006

Department of Thermal Fluid Flow Engines	
Technical University of Munich,	02/2006
Chair in Apparatus and Plant Engineering	
Energietechnik Leipzig (company license),	02/2006
Siemens Power Generation, Erlangen	02/2006, 03/2006
RWE Power, Essen	03/2006
WAETAS, Pobershau	04/2006
Siemens Power Generation, Goerlitz	04/2006
Technical University of Braunschweig,	04/2006
Department of Thermodynamics	
EnviCon & Plant Engineering, Nuremberg	04/2006
Brassel Engineering, Dresden	05/2006
University of Halle-Merseburg,	05/2006
Department of USET Merseburg incorporated society	
Technical University of Dresden,	05/2006
Professorship of Thermic Energy Machines and Plants	
Fichtner Consulting & IT Stuttgart	05/2006
(company licenses and distribution)	
Suedzucker, Ochsenfurt	06/2006
M&M Turbine Technology, Bielefeld	06/2006
Feistel Engineering, Volkach	07/2006
ThyssenKrupp Marine Systems, Kiel	07/2006
Caliqua, Basel, Switzerland (company license)	09/2006
Atlas-Stord, Rodovre, Denmark	09/2006
Konstanz University of Applied Sciences,	10/2006
Course of Studies Construction and Development	
Siemens Power Generation, Duisburg	10/2006
Hannover University of Applied Sciences,	10/2006
Department of Mechanical Engineering	
Siemens Power Generation, Berlin	11/2006
Zikesch Armaturentechnik, Essen	11/2006
Wismar University of Applied Sciences, Seafaring Department	11/2006
BASF, Schwarzheide	12/2006
Enertech Energie und Technik, Radebeul	12/2006

## 2005

TUEV Nord, Hannover	01/2005
J.H.K Plant Engineering and Service, Bremerhaven	01/2005
Electrowatt-EKONO, Zurich, Switzerland	01/2005
FCIT, Stuttgart	01/2005
Energietechnik Leipzig (company license)	02/2005, 04/2005
	07/2005
eta Energieberatung, Pfaffenhofen	02/2005
FZR Forschungszentrum, Rossendorf/Dresden	04/2005
University of Saarbruecken	04/2005
Technical University of Dresden	04/2005
Professorship of Thermic Energy Machines and Plants	
Grenzebach BSH, Bad Hersfeld	04/2005
TUEV Nord, Hamburg	04/2005

Technical University of Dresden, Waste Management	05/2005
Siemens Power Generation, Goerlitz	05/2005
Duesseldorf University of Applied Sciences, Department of Mechanical Engineering and Process Engineering	05/2005
Redacom, Nidau, Switzerland	06/2005
Dumas Verfahrenstechnik, Hofheim	06/2005
Alensys Engineering, Erkner	07/2005
Stadtwerke Leipzig	07/2005
SaarEnergie, Saarbruecken	07/2005
ALSTOM ITC, Rugby, Great Britain	08/2005
Technical University of Cottbus, Chair in Power Plant Engineering	08/2005
Vattenfall Europe, Berlin (group license)	08/2005
Technical University of Berlin	10/2005
Basel University of Applied Sciences, Department of Mechanical Engineering, Switzerland	10/2005
Midiplan, Bietigheim-Bissingen	11/2005
Technical University of Freiberg, Chair in Hydrogeology	11/2005
STORA ENSO Sachsen, Eilenburg	12/2005
Energieversorgung Halle (company license)	12/2005
KEMA IEV, Dresden	12/2005

## 2004

Vattenfall Europe (group license)	01/2004
TUEV Nord, Hamburg	01/2004
University of Stuttgart, Institute of Thermodynamics and Heat Engineering	02/2004
MAN B&W Diesel A/S, Copenhagen, Denmark	02/2004
Siemens AG Power Generation, Erlangen	02/2004
Ulm University of Applied Sciences	03/2004
Visteon, Kerpen	03/2004, 10/2004
Technical University of Dresden, Professorship of Thermic Energy Machines and Plants	04/2004
Rerum Cognitio, Zwickau	04/2004
University of Saarbruecken	04/2004
Grenzebach BSH, Bad Hersfeld	04/2004
SOFBID Zwingenberg (general EBSILON program license)	04/2004
EnBW Energy Solutions, Stuttgart	05/2004
HEW-Kraftwerk, Tiefstack	06/2004
h s energieanlagen, Freising	07/2004
FCIT, Stuttgart	08/2004
Physikalisch Technische Bundesanstalt (PTB), Braunschweig	08/2004
Mainova Frankfurt	08/2004
Rietschle Energieplaner, Winterthur, Switzerland	08/2004
MAN Turbo Machines, Oberhausen	09/2004
TUEV Sued, Dresden	10/2004
STEAG Kraftwerk, Herne	10/2004, 12/2004
University of Weimar	10/2004
energeticals (e-concept), Munich	11/2004
SorTech, Halle	11/2004

Enertech EUT, Radebeul (company license)	11/2004
Munich University of Applied Sciences	12/2004
STORA ENSO Sachsen, Eilenburg	12/2004
Technical University of Cottbus, Chair in Power Plant Engineering	12/2004
Freudenberg Service, Weinheim	12/2004

## 2003

Paper Factory, Utzenstorf, Switzerland	01/2003
MAB Plant Engineering, Vienna, Austria	01/2003
Wulff Energy Systems, Husum	01/2003
Technip Benelux BV, Zoetermeer, Netherlands	01/2003
ALSTOM Power, Baden, Switzerland	01/2003, 07/2003
VER, Dresden	02/2003
Rietschle Energieplaner, Winterthur, Switzerland	02/2003
DLR, Leupholdhausen	04/2003
Emden University of Applied Sciences, Department of Technology	05/2003
Pettersson+Ahrends, Ober-Moerlen	05/2003
SOFBID ,Zwingenberg (general EBSILON program license)	05/2003
Ingenieurbuero Ostendorf, Gummersbach	05/2003
TUEV Nord, Hamburg	06/2003
Muenstermann GmbH, Telgte-Westbevern	06/2003
University of Cali, Colombia	07/2003
Atlas-Stord, Rodovre, Denmark	08/2003
ENERKO, Aldenhoven	08/2003
STEAG RKB, Leuna	08/2003
eta Energieberatung, Pfaffenhofen	08/2003
exergie, Dresden	09/2003
AWTEC, Zurich, Switzerland	09/2003
Energie, Timelkam, Austria	09/2003
Electrowatt-EKONO, Zurich, Switzerland	09/2003
LG, Annaberg-Buchholz	10/2003
FZR Forschungszentrum, Rossendorf/Dresden	10/2003
EnviCon & Plant Engineering, Nuremberg	11/2003
Visteon, Kerpen	11/2003
VEO Vulkan Energiewirtschaft Oderbruecke, Eisenhuettenstadt	11/2003
Stadtwerke Hannover	11/2003
SaarEnergie, Saarbruecken	11/2003
Fraunhofer-Gesellschaft, Munich	12/2003
Erfurt University of Applied Sciences, Department of Supply Engineering	12/2003
SorTech, Freiburg	12/2003
Mainova, Frankfurt	12/2003
Energieversorgung Halle	12/2003

## 2002

Hamilton Medical AG, Rhaezuens, Switzerland	01/2002
Bochum University of Applied Sciences, Department of Thermo- and Fluid Dynamics	01/2002

SAAS, Possendorf/Dresden	02/2002
Siemens, Karlsruhe	02/2002
(general license for the WinIS information system)	
FZR Forschungszentrum, Rossendorf/Dresden	03/2002
CompAir, Simmern	03/2002
GKS Gemeinschaftskraftwerk, Schweinfurt	04/2002
ALSTOM Power Baden, Switzerland (group licenses)	05/2002
InfraServ, Gendorf	05/2002
SoftSolutions, Muehlhausen (company license)	05/2002
DREWAG, Dresden (company license)	05/2002
SOFBID, Zwingenberg	06/2002
(general EBSILON program license)	
Kleemann Engineering, Dresden	06/2002
Caliqua, Basel, Switzerland (company license)	07/2002
PCK Raffinerie, Schwedt (group license)	07/2002
Fischer-Uhrig Engineering, Berlin	08/2002
Fichtner Consulting & IT, Stuttgart	08/2002
(company licenses and distribution)	
Stadtwerke Duisburg	08/2002
Stadtwerke Hannover	09/2002
Siemens Power Generation, Goerlitz	10/2002
Energieversorgung Halle (company license)	10/2002
Bayer, Leverkusen	11/2002
Dillinger Huette, Dillingen	11/2002
G.U.N.T. Geraetebau, Barsbuettel	12/2002
(general license and training test benches)	
VEAG, Berlin (group license)	12/2002

## 2001

ALSTOM Power, Baden, Switzerland	01/2001, 06/2001 12/2001
KW2 B. V., Amersfoot, Netherlands	01/2001, 11/2001
Eco Design, Saitamaken, Japan	01/2001
M&M Turbine Technology, Bielefeld	01/2001, 09/2001
MVV Energie, Mannheim	02/2001
Technical University of Dresden, Department of Power Machinery and Plants	02/2001
PREUSSAG NOELL, Wuerzburg	03/2001
Fichtner Consulting & IT Stuttgart	04/2001
(company licenses and distribution)	
Muenstermann GmbH, Telgte-Westbevern	05/2001
SaarEnergie, Saarbruecken	05/2001
Siemens, Karlsruhe	08/2001
(general license for the WinIS information system)	
Neusiedler AG, Ulmerfeld, Austria	09/2001
h s energieanlagen, Freising	09/2001
Electrowatt-EKONO, Zurich, Switzerland	09/2001
IPM Zittau/Goerlitz University of Applied Sciences (general license)	10/2001

eta Energieberatung, Pfaffenhofen	11/2001
ALSTOM Power Baden, Switzerland	12/2001
VEAG, Berlin (group license)	12/2001

## 2000

SOFBID, Zwingenberg	01/2000
(general EBSILON program license)	
AG KKK - PGW Turbo, Leipzig	01/2000
PREUSSAG NOELL, Wuerzburg	01/2000
M&M Turbine Technology, Bielefeld	01/2000
IBR Engineering Reis, Nittendorf-Undorf	02/2000
GK, Hannover	03/2000
KRUPP-UHDE, Dortmund (company license)	03/2000
UMAG W. UDE, Husum	03/2000
VEAG, Berlin (group license)	03/2000
Thinius Engineering, Erkrath	04/2000
SaarEnergie, Saarbruecken	05/2000, 08/2000
DVO Data Processing Service, Oberhausen	05/2000
RWTH Aachen University	06/2000
VAUP Process Automation, Landau	08/2000
Knuerr-Lommatec, Lommatzsch	09/2000
AVACON, Helmstedt	10/2000
Compania Electrica, Bogota, Colombia	10/2000
G.U.N.T. Geraetebau, Barsbuettel	11/2000
(general license for training test benches)	
Steinhaus Informationssysteme, Datteln	12/2000
(general license for process data software)	

## 1999

Bayernwerk, Munich	01/1999
DREWAG, Dresden (company license)	02/1999
KEMA IEV, Dresden	03/1999
Regensburg University of Applied Sciences	04/1999
Fichtner Consulting & IT, Stuttgart	07/1999
(company licenses and distribution)	
Technical University of Cottbus, Chair in Power Plant Engineering	07/1999
Technical University of Graz, Department of Thermal Engineering, Austria	11/1999
Ostendorf Engineering, Gummersbach	12/1999

## 1998

Technical University of Cottbus, Chair in Power Plant Engineering	05/1998
Fichtner Consulting & IT (CADIS information systems) Stuttgart	05/1998
(general KPRO program license)	
M&M Turbine Technology Bielefeld	06/1998
B+H Software Engineering Stuttgart	08/1998
Alfa Engineering, Switzerland	09/1998
VEAG Berlin (group license)	09/1998
NUTEC Engineering, Bisikon, Switzerland	10/1998

SCA Hygiene Products, Munich	10/1998
RWE Energie, Neurath	10/1998
Wilhelmshaven University of Applied Sciences	10/1998
BASF, Ludwigshafen (group license)	11/1998
Energieversorgung, Offenbach	11/1998

## **1997**

Gerb, Dresden	06/1997
Siemens Power Generation, Goerlitz	07/1997